

Recessed

Grill DL1348

Recessed spotlight




Recessed spotlight. 7 or 13 W. Four beam angles, 15° to 55°. 2700, 3000, 4000 K. 97 CRI.

— Ceiling cut-out Ø68 / Ø100 mm

— LED source: Citizen

Power 7 W, 13 W	Voltage max 19 V, max 37 V	Luminous flux 630 lm, 1200 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 15°, 24°, 36°, 55°
IP rating IP20	Certifications CE	Mounting Recessed

Dimensions

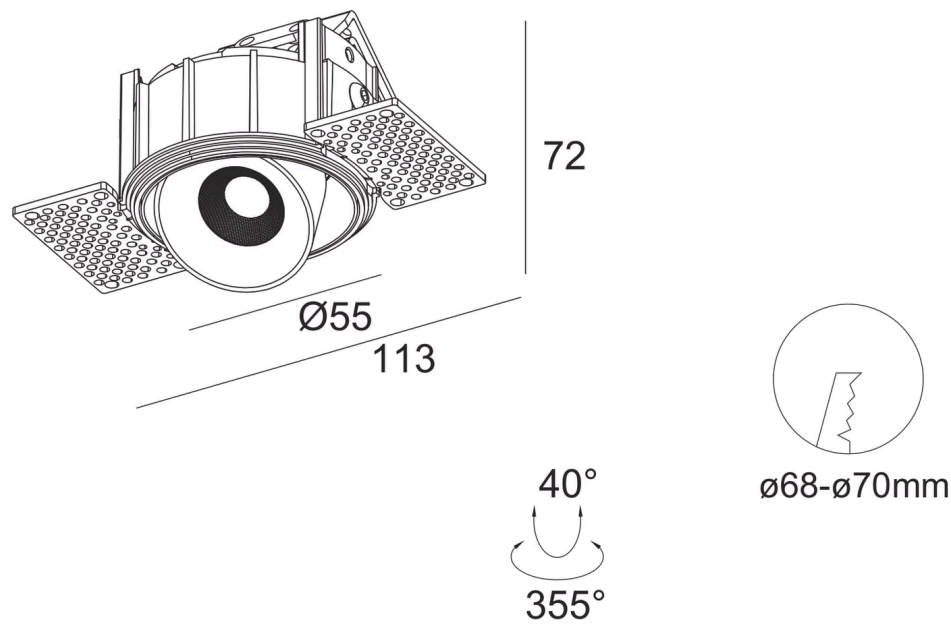


Models

Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1348	7 W	max 19 V	630 lm	97 CRI	Ø55 × 72 (flange 113 mm)	Ø68 mm	15° 24° 36° 55°	350 mA
DL1349	13 W	max 37 V	1200 lm	97 CRI	Ø81 × 92 (flange 149 mm)	Ø100 mm	15° 24° 36° 55°	350 mA

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1349, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1349, 13 W, 15° beam

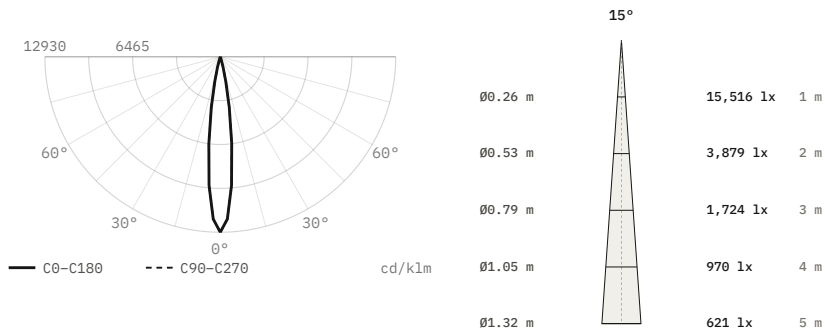


Luminous flux	1,200 lm
Efficacy	92 lm/W
Peak intensity	15,516 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø81 × 92 mm
Data	Calculated from catalogue data

DL1349, 13 W, 24° beam

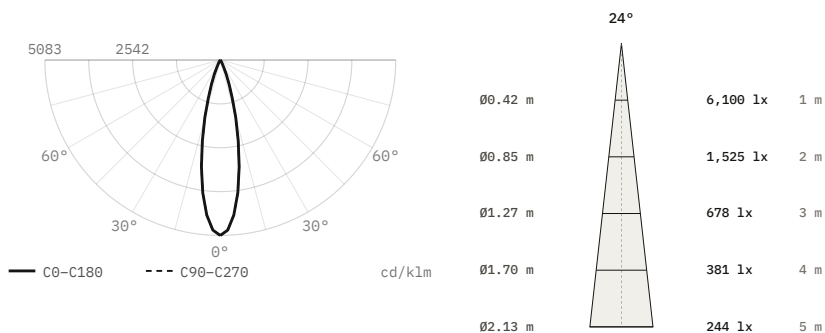


Luminous flux	1,200 lm
Efficacy	92 lm/W
Peak intensity	6,100 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø81 × 92 mm
Data	Calculated from catalogue data

DL1349, 13 W, 36° beam

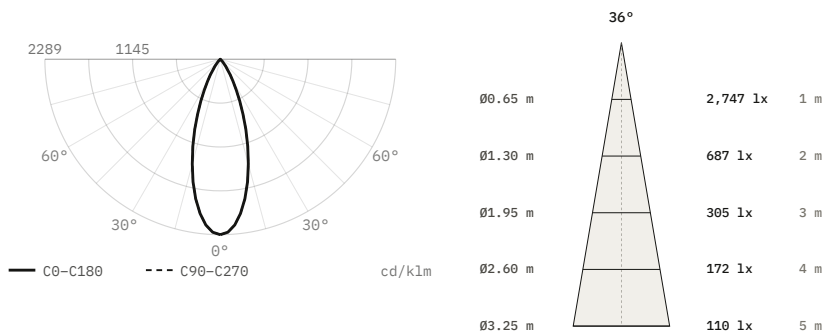

Luminous flux	1,200 lm
Efficacy	92 lm/W
Peak intensity	2,747 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø81 × 92 mm
Data	Calculated from catalogue data

DL1349, 13 W, 55° beam

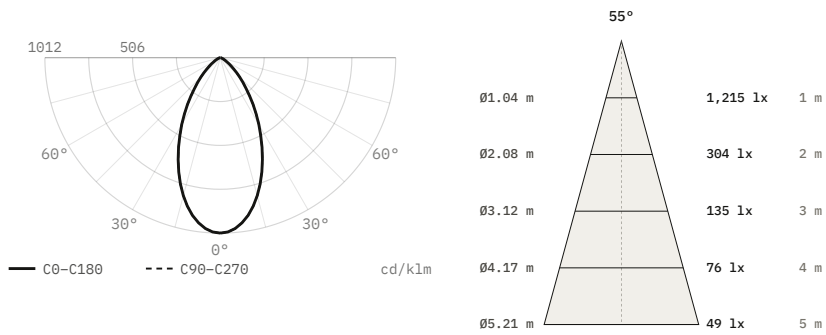

Luminous flux	1,200 lm
Efficacy	92 lm/W
Peak intensity	1,215 cd, 1,012 cd/klm
Beam angle (50%)	55°
Field angle (10%)	100.2°
Cut-off angle (2.5%)	63°
Flux 0–30° / 30–60° / 60–90°	58.2 / 38.8 / 3 %
Size	Ø81 × 92 mm
Data	Calculated from catalogue data