

Track spotlights

High efficiency S3-6180G

Track spotlight




Track spotlight. 24 W. Four beam angles, 15° to 60°. 3000, 4000 K. 97 CRI.

— LED source: Citizen

Power 24 W	Luminous flux 3100–3200 lm	Colour temperature 3000 K, 4000 K
CRI 97 CRI	Beam angles 15°, 24°, 38°, 60°	IP rating IP20
Certifications CE, RoHS, EMC, LVD	Mounting Recessed, Surface, Magnetic track	Control DALI-2, 0-10V, Triac
Finishes White, Black		

Dimensions

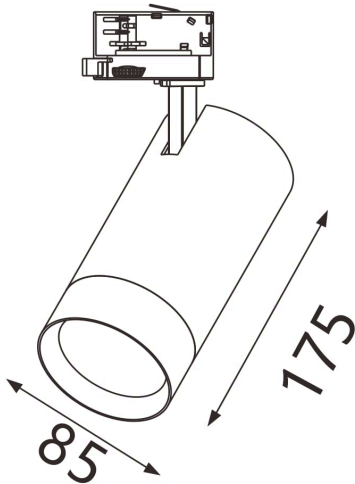


Models

Code	Version	Power	Flux	CRI	Size	Beam
S3-6180G	Track	24 W	3100–3200 lm	97 CRI	85 × 175 mm	15° 24° 38° 60°

Photometric data

Illuminance on the beam axis (lx) and beam diameter at each mounting distance, per model and beam angle. IES files for every model and beam can be downloaded from the product page.

24 W

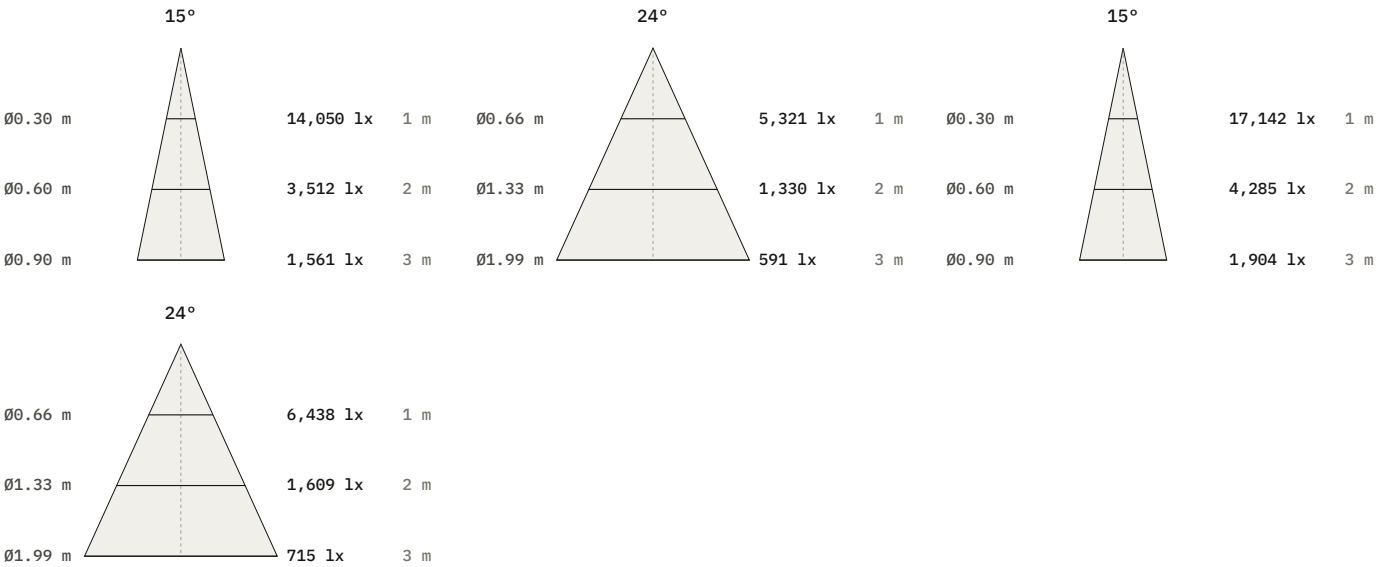


Beam	1 m	2 m	3 m
15°	14,050 lx Ø300 mm	3,512 lx Ø600 mm	1,561 lx Ø900 mm
24°	5,321 lx Ø660 mm	1,330 lx Ø1330 mm	591 lx Ø1990 mm
15°	17,142 lx Ø300 mm	4,285 lx Ø600 mm	1,904 lx Ø900 mm
24°	6,438 lx Ø660 mm	1,609 lx Ø1330 mm	715 lx Ø1990 mm

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for S3-6180G, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

S3-6180G, 24 W, 15° beam

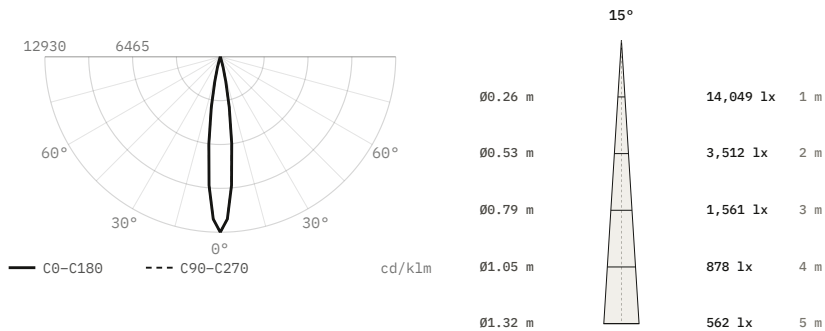


Luminous flux	1,087 lm
Efficacy	45 lm/W
Peak intensity	14,049 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	175 × 85 mm
Data	Calculated from catalogue data

S3-6180G, 24 W, 24° beam

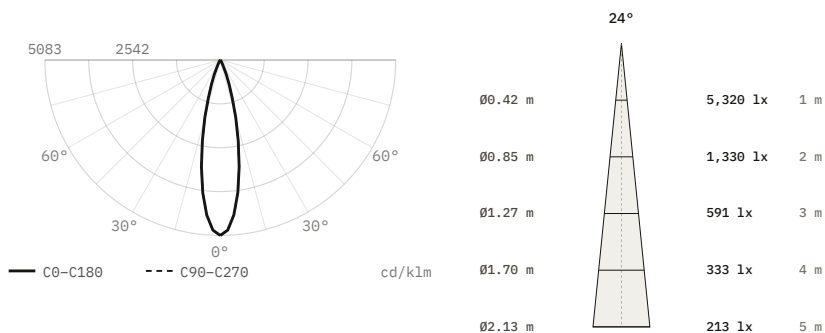



Luminous flux	1,047 lm
Efficacy	44 lm/W
Peak intensity	5,320 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	175 × 85 mm
Data	Calculated from catalogue data

S3-6180G, 24 W, 38° beam

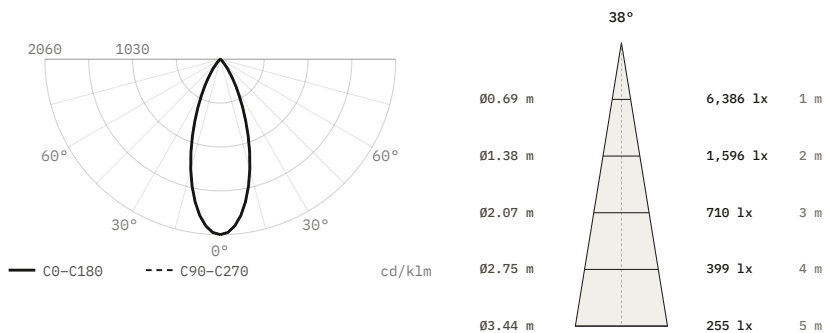

Luminous flux	3,100 lm
Efficacy	129 lm/W
Peak intensity	6,386 cd, 2,060 cd/klm
Beam angle (50%)	38°
Field angle (10%)	69.3°
Cut-off angle (2.5%)	43.5°
Flux 0–30° / 30–60° / 60–90°	83 / 16.9 / 0.1 %
Size	175 × 85 mm
Data	Calculated from catalogue data

S3-6180G, 24 W, 60° beam

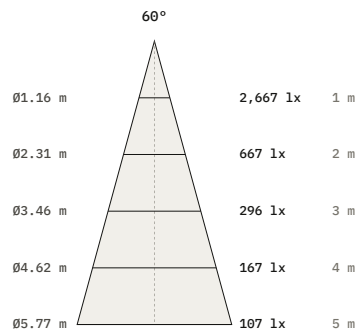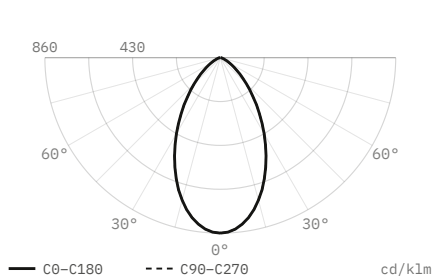

Luminous flux	3,100 lm
Efficacy	129 lm/W
Peak intensity	2,667 cd, 860 cd/klm
Beam angle (50%)	60°
Field angle (10%)	109.4°
Cut-off angle (2.5%)	69°
Flux 0-30° / 30-60° / 60-90°	52.4 / 42.6 / 5 %
Size	175 × 85 mm
Data	Calculated from catalogue data

DiaNoche
Via Tortona, 31, 20144 Milano MI, Italy
service@dianoche.it
dianoche.it

Technical data may change without notice.