


Wall

Ida

Wall light

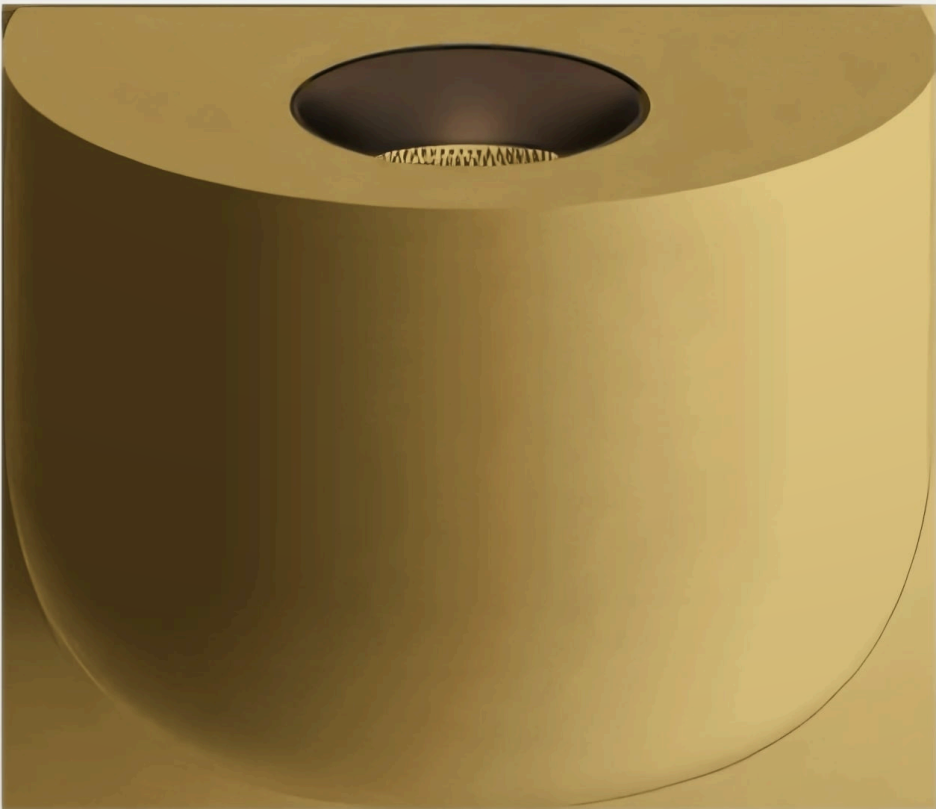


Wall light. 8 W. Four beam angles, 15° to 60°. 3000, 4000 K. 97 CRI.

— LED source: Citizen

Power 8 W	Voltage 36 V	Colour temperature 3000 K, 4000 K
CRI 97 CRI	Beam angles 15°, 24°, 36°, 60°	IP rating IP20
Mounting Wall	Control On/Off	Finishes White, Black, Silver, Brass, Bronze

Dimensions

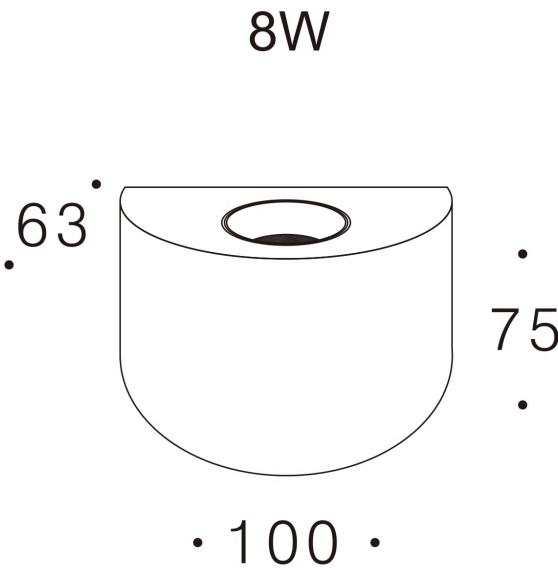

Models

Code	Power	Voltage	CRI	Size	Beam	Notes
IDA	8 W	36 V	97 CRI	100 × 75 × 63 mm	15° 24° 36° 60°	200 mA


Finishes



Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for IDA, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

IDA, 8 W, 15° beam

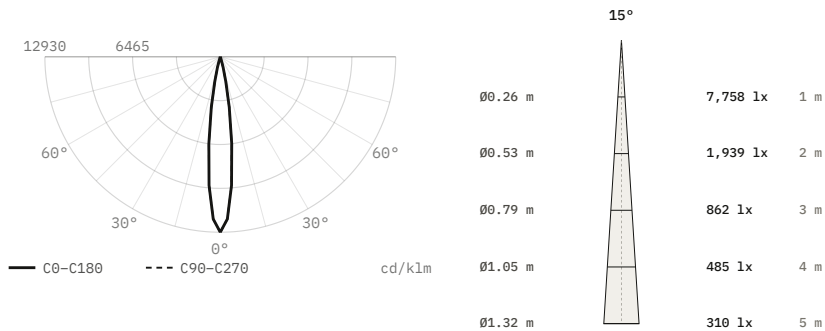


Luminous flux	600 lm
Efficacy	75 lm/W
Peak intensity	7,758 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	100 × 75 × 63 mm
Data	Estimated from catalogue data

IDA, 8 W, 24° beam

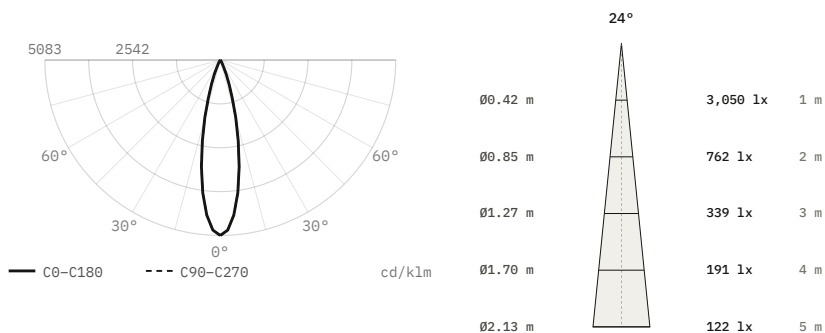


Luminous flux	600 lm
Efficacy	75 lm/W
Peak intensity	3,050 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	100 × 75 × 63 mm
Data	Estimated from catalogue data

IDA, 8 W, 36° beam

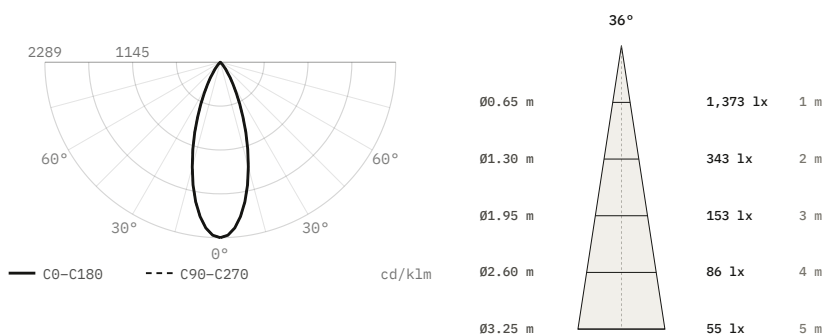

Luminous flux	600 lm
Efficacy	75 lm/W
Peak intensity	1,373 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	100 × 75 × 63 mm
Data	Estimated from catalogue data

IDA, 8 W, 60° beam

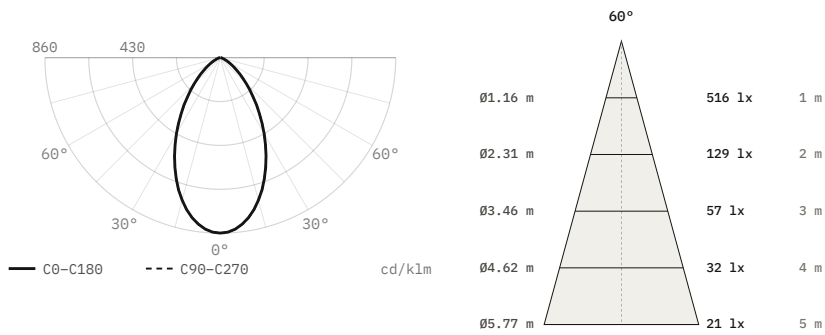

Luminous flux	600 lm
Efficacy	75 lm/W
Peak intensity	516 cd, 860 cd/klm
Beam angle (50%)	60°
Field angle (10%)	109.4°
Cut-off angle (2.5%)	69°
Flux 0–30° / 30–60° / 60–90°	52.4 / 42.6 / 5 %
Size	100 × 75 × 63 mm
Data	Estimated from catalogue data