

Recessed

L18

Recessed spotlight




Recessed spotlight. 10 or 15 W. 2700, 3000, 4000 K.
97 CRI.

- Ceiling cut-out Ø57 / Ø75 mm
- LED source: Citizen
- UGR <12

Power	Voltage	Colour temperature
10 W, 15 W	36 V	2700 K, 3000 K, 4000 K
CRI	IP rating	Mounting
97 CRI	IP20	Recessed
Control	Finishes	
On/Off, Triac	Black	


Dimensions

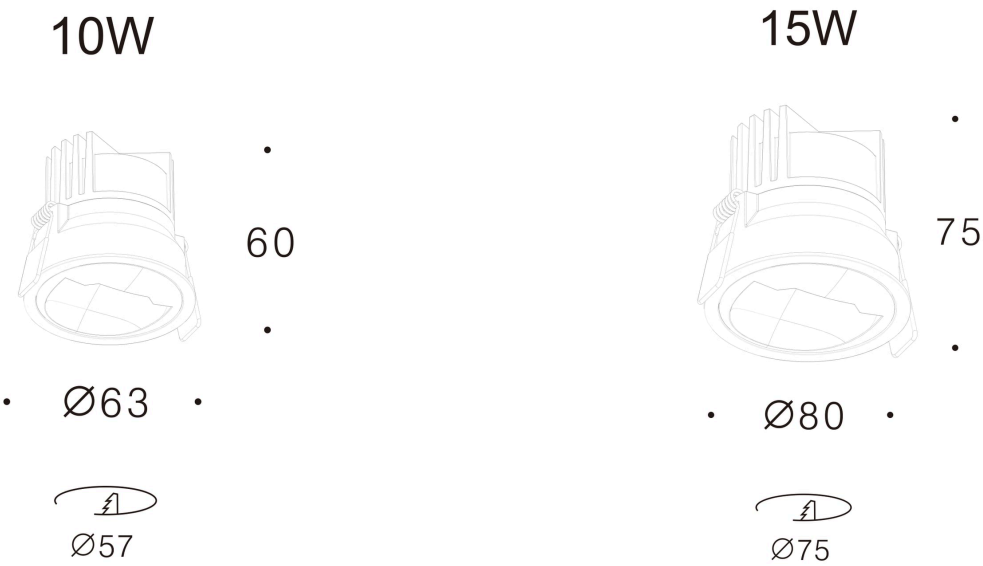

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for RE-L18-1502, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

RE-L18-1502, 15 W, wall washer

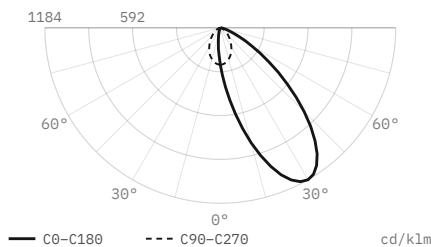

Luminous flux	900 lm
Efficacy	60 lm/W
Peak intensity	1,065 cd, 1,184 cd/klm
Beam angle (50%)	asymmetric
Cut-off angle (2.5%)	80°
Flux 0–30° / 30–60° / 60–90°	29.6 / 61.1 / 9.3 %
Size	Ø80 × 75 mm
Data	Estimated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.