

Superslim 5 mm system

Line FL

Superslim 5 mm linear luminaire




Linear luminaire for the Superslim 5 mm magnetic track. 5, 10 or 20 W. 100° beam. 2700, 3000, 4000, 5000 K. 97 CRI.

— LED source: Citizen

Power	Voltage	Colour temperature
5 W, 10 W, 20 W	48 V DC	2700 K, 3000 K, 4000 K, 5000 K
CRI	Beam angles	Mounting
97 CRI	100°	Magnetic track
Control	Finishes	
Casambi, Tuya, DALI, 0-10V	White, Black	

Dimensions

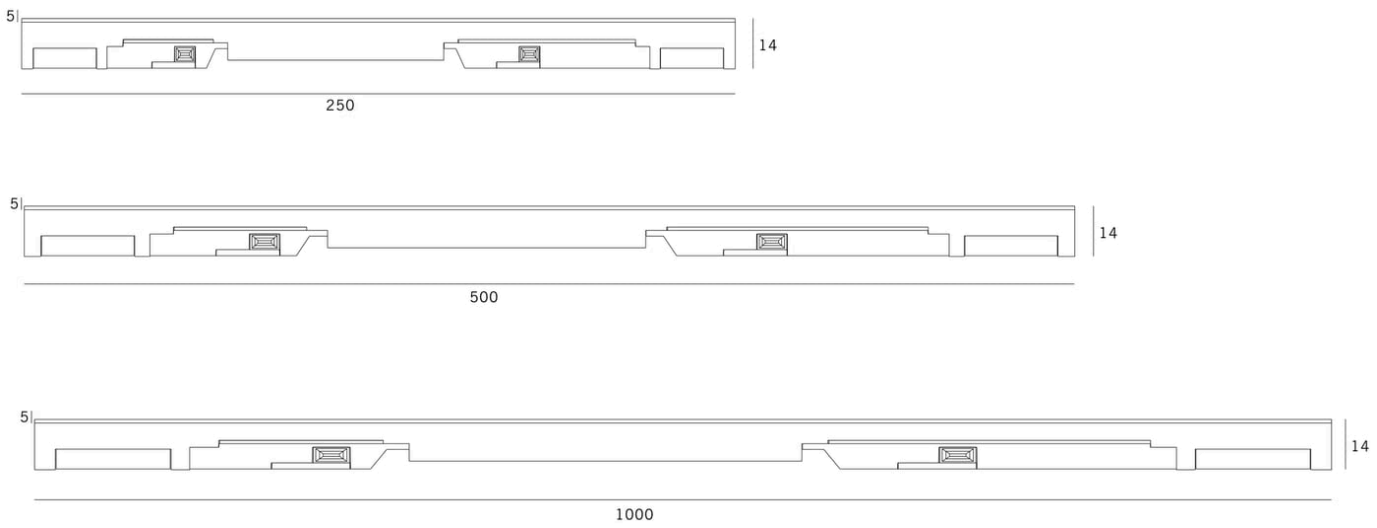


Models

Code	Version	Power	Voltage	CRI	Size	Beam
FL250	250 mm	5 W	48 V DC	97 CRI	250 × 5 × 14 mm	100°
FL500	500 mm	10 W	48 V DC	97 CRI	500 × 5 × 14 mm	100°
FL1000	1000 mm	20 W	48 V DC	97 CRI	1000 × 5 × 14 mm	100°

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for FL1000, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

FL1000, 20 W, 100° beam

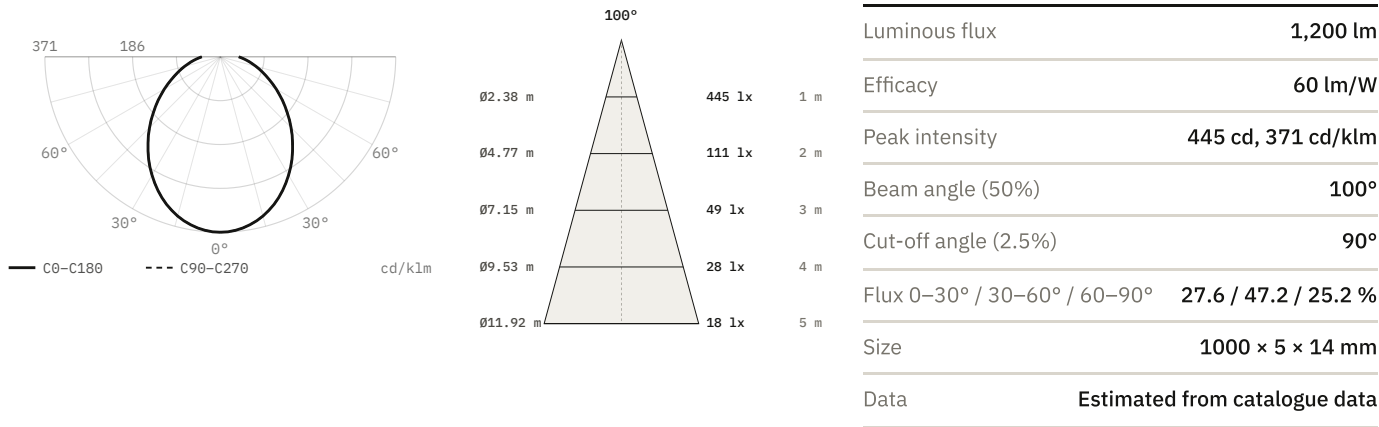

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.