

Superslim 5 mm system

# Locus DD12

Superslim 5 mm surface luminaire




Surface luminaire for the Superslim 5 mm magnetic track. 12 W. 100° beam. 2700, 3000, 4000, 5000 K. 97 CRI.

— LED source: Citizen

|                                       |                          |                                                      |
|---------------------------------------|--------------------------|------------------------------------------------------|
| Power<br>12 W                         | Voltage<br>48 V DC       | Colour temperature<br>2700 K, 3000 K, 4000 K, 5000 K |
| CRI<br>97 CRI                         | Beam angles<br>100°      | Mounting<br>Magnetic track                           |
| Control<br>Casambi, Tuya, DALI, 0-10V | Finishes<br>White, Black |                                                      |


Dimensions

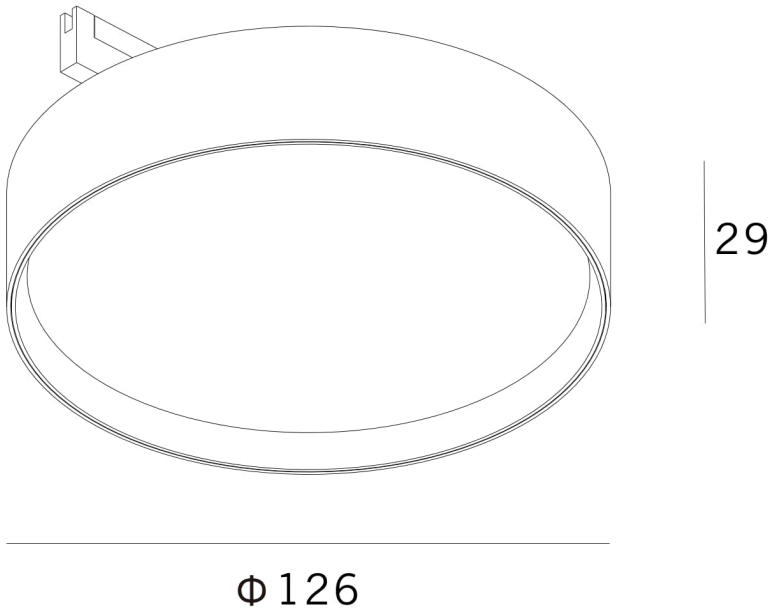

Models

| Code | Power | Voltage | CRI    | Size         | Beam |
|------|-------|---------|--------|--------------|------|
| DD12 | 12 W  | 48 V DC | 97 CRI | Ø126 × 29 mm | 100° |


Finishes

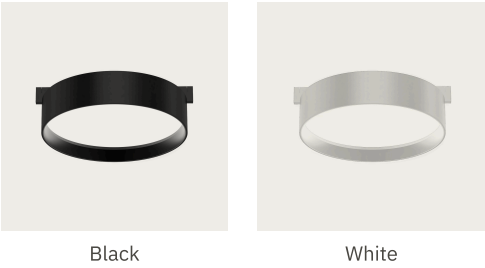

# Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DD12, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

## DD12, 12 W, 100° beam

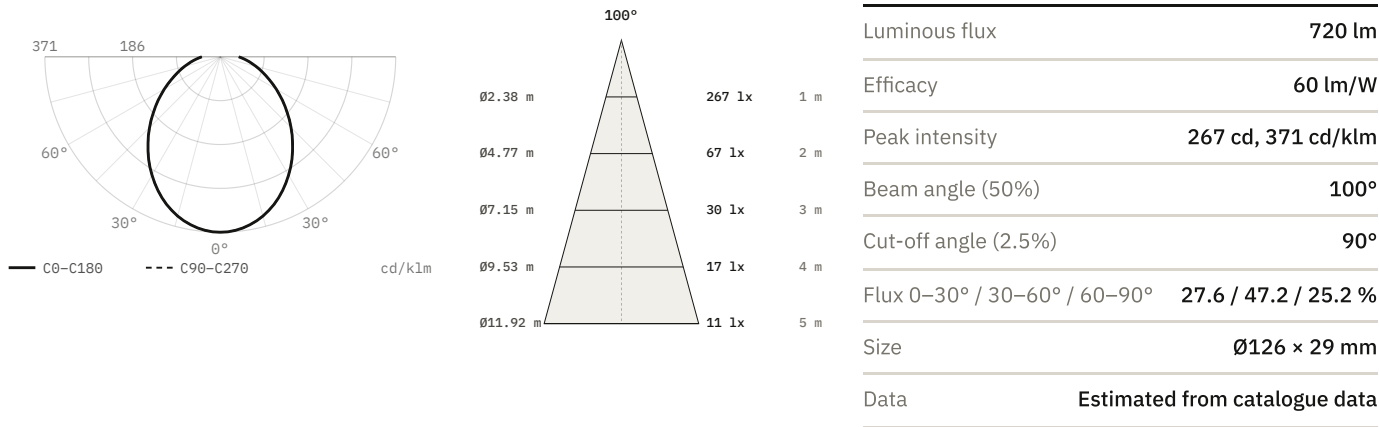

DiaNoche  
service@dianoche.it  
dianoche.it

Technical data may change without notice.