

Superslim 5 mm system

Locus Flex LF4


Superslim 5 mm spotlight



Spotlight for the Superslim 5 mm magnetic track. 4 W. — LED source: Citizen
Three beam angles, 15° to 36°. 2700, 3000, 4000, 5000 K. 97 CRI.

Power 4 W	Voltage 48 V DC	Colour temperature 2700 K, 3000 K, 4000 K, 5000 K
CRI 97 CRI	Beam angles 15°, 24°, 36°	Mounting Magnetic track
Control Casambi, Tuya, DALI, 0-10V	Finishes White, Black	

Dimensions

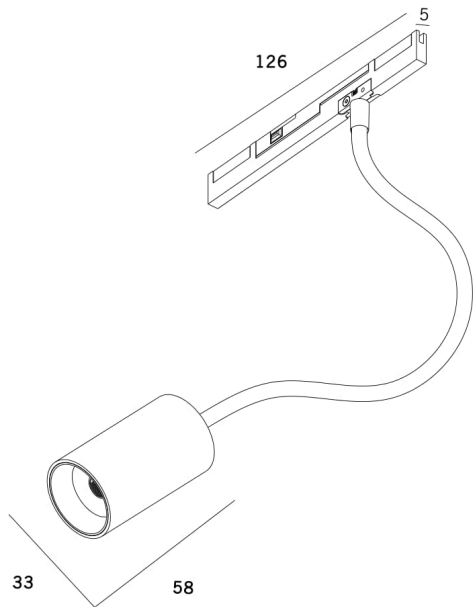


Models

Code	Power	Voltage	CRI	Size	Beam
LF4	4 W	48 V DC	97 CRI	Ø34 × 58 × 126 mm	15° 24° 36°

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for LF4, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

LF4, 4 W, 15° beam

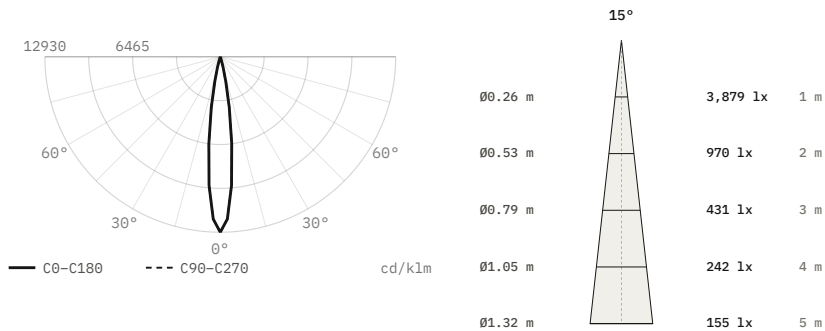


Luminous flux	300 lm
Efficacy	75 lm/W
Peak intensity	3,879 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø34 × 58 mm
Data	Estimated from catalogue data

LF4, 4 W, 24° beam

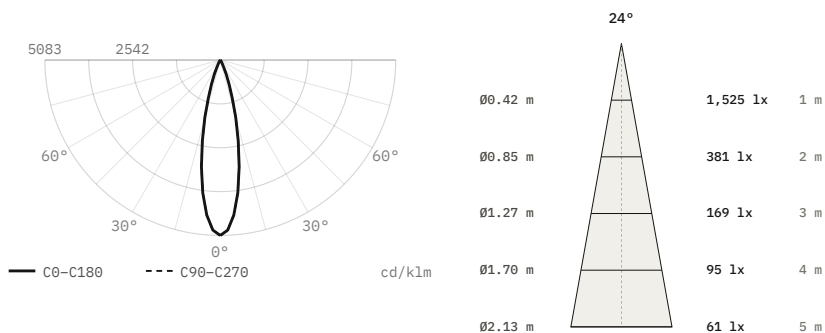

Luminous flux	300 lm
Efficacy	75 lm/W
Peak intensity	1,525 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø34 × 58 mm
Data	Estimated from catalogue data

LF4, 4 W, 36° beam

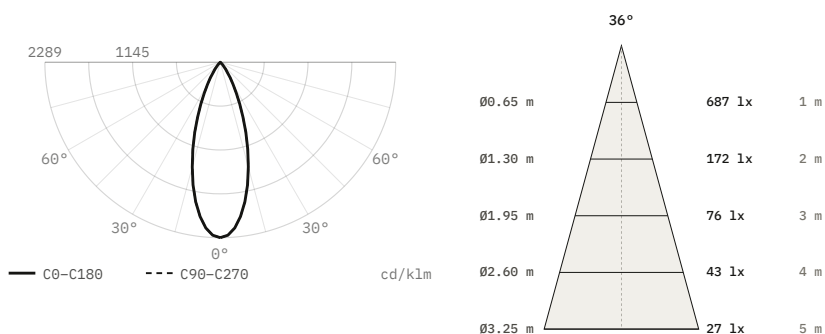

Luminous flux	300 lm
Efficacy	75 lm/W
Peak intensity	687 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø34 × 58 mm
Data	Estimated from catalogue data

