

Superslim 5 mm system

Locus Pendant PLA

Superslim 5 mm pendant




Pendant for the Superslim 5 mm magnetic track. 2 W.
15° or 24° beam. 2700, 3000, 4000, 5000 K. 97 CRI.

— LED source: Citizen

Power 2 W	Voltage 48 V DC	Colour temperature 2700 K, 3000 K, 4000 K, 5000 K
CRI 97 CRI	Beam angles 15°, 24°	Mounting Magnetic track, Suspended
Control Casambi, Tuya, DALI, 0-10V	Finishes White, Black	

Dimensions

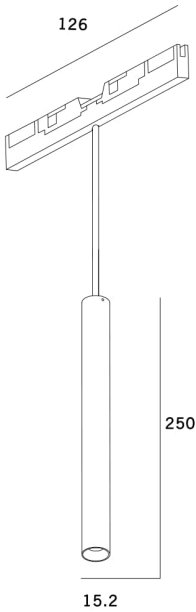

Models

Code	Version	Power	Voltage	CRI	Size	Beam
PLA250	250 mm	2 W	48 V DC	97 CRI	Ø15.2 × 250 × 126 mm	15° 24°
PLA300	300 mm	2 W	48 V DC	97 CRI	Ø15.2 × 300 × 126 mm	15° 24°


Finishes



Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for PLA250, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

PLA250, 2 W, 15° beam

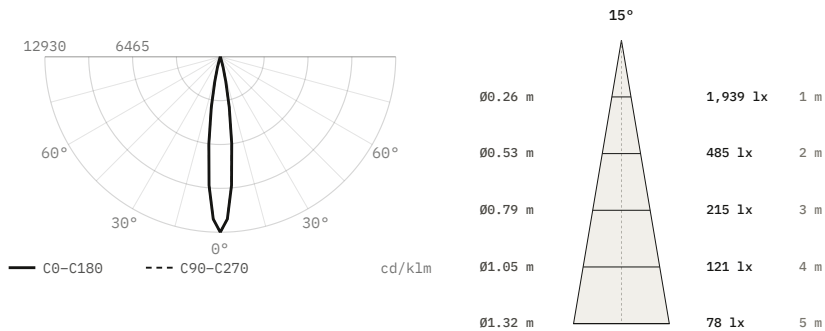

Luminous flux	150 lm
Efficacy	75 lm/W
Peak intensity	1,939 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø15.2 × 250 mm
Data	Estimated from catalogue data

PLA250, 2 W, 24° beam

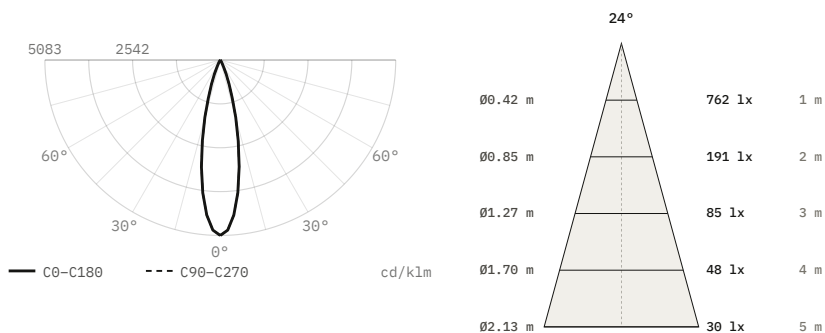

Luminous flux	150 lm
Efficacy	75 lm/W
Peak intensity	762 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø15.2 × 250 mm
Data	Estimated from catalogue data