Superslim 5 mm system

Locus Super Spot SL10

Superslim 5 mm spotlight

Spotlight for the Superslim 5 mm magnetic track. 10 W. Three beam angles, 15° to 36°. 2700, 3000, 4000, 5000 K. 97 CRI.

- LED source: Citizen

Power **10 W**	Voltage **48 V DC**	Colour temperature **2700 K, 3000 K, 4000 K, 5000 K**
CRI **97 CRI**	Beam angles **15°, 24°, 36°**	Mounting **Magnetic track**
Control **Casambi, Tuya, DALI, 0-10V**	Finishes **White, Black**	

Dimensions

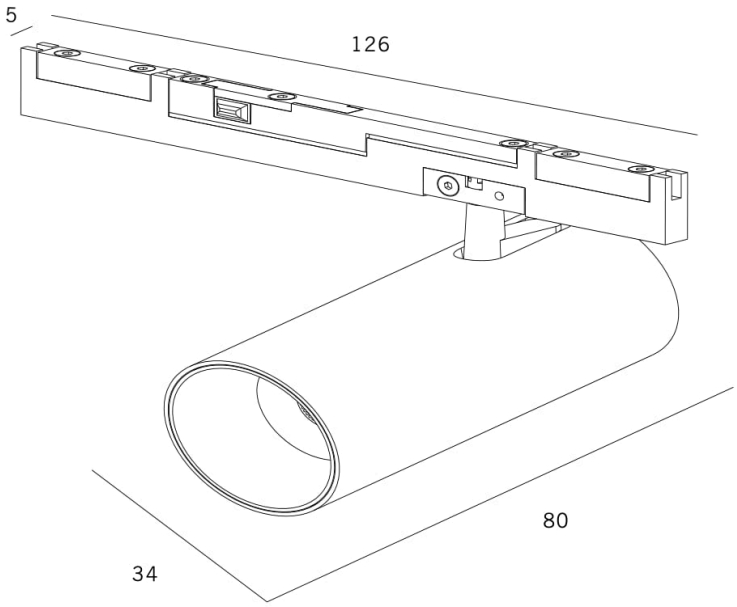

Models

Code	Power	Voltage	CRI	Size	Beam
SL10	10 W	48 V DC	97 CRI	Ø34 × 80 × 126 mm	15° 24° 36°

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for SL10, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

SL10, 10 W, 15° beam

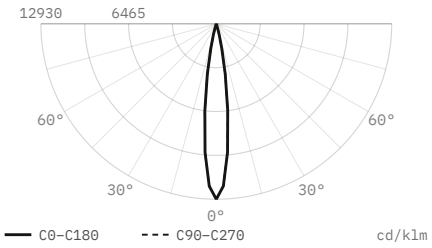

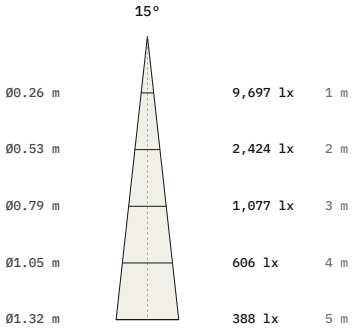

Luminous flux	750 lm
Efficacy	75 lm/W
Peak intensity	9,697 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø34 × 80 mm
Data	Estimated from catalogue data

SL10, 10 W, 24° beam

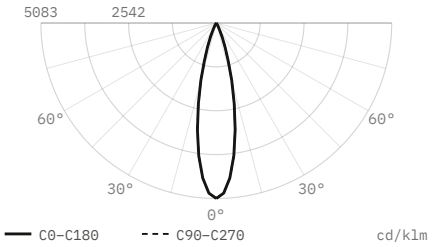

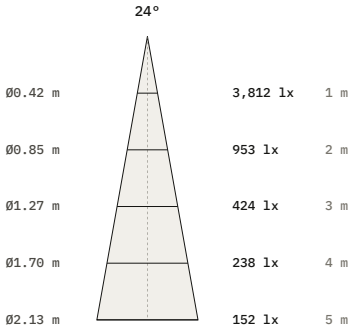

Luminous flux	750 lm
Efficacy	75 lm/W
Peak intensity	3,812 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø34 × 80 mm
Data	Estimated from catalogue data

SL10, 10 W, 36° beam

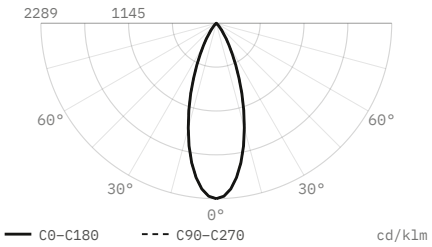

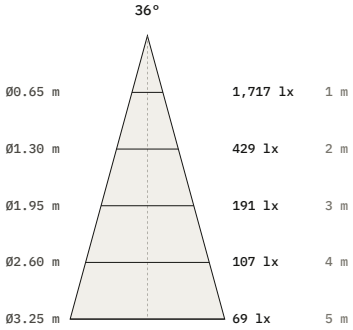

Luminous flux	750 lm
Efficacy	75 lm/W
Peak intensity	1,717 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø34 × 80 mm
Data	Estimated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.