

Superslim 5 mm system

Locus Super Spot TW10

Superslim 5 mm spotlight




Spotlight for the Superslim 5 mm magnetic track. 10 W.
24° or 36° beam. 2700, 3000, 4000, 5000 K. 97 CRI.

— LED source: Citizen

Power 10 W	Voltage 48 V DC	Colour temperature 2700 K, 3000 K, 4000 K, 5000 K
CRI 97 CRI	Beam angles 24°, 36°	Mounting Magnetic track
Control Casambi, Tuya, DALI, 0-10V	Finishes White, Black	

Dimensions

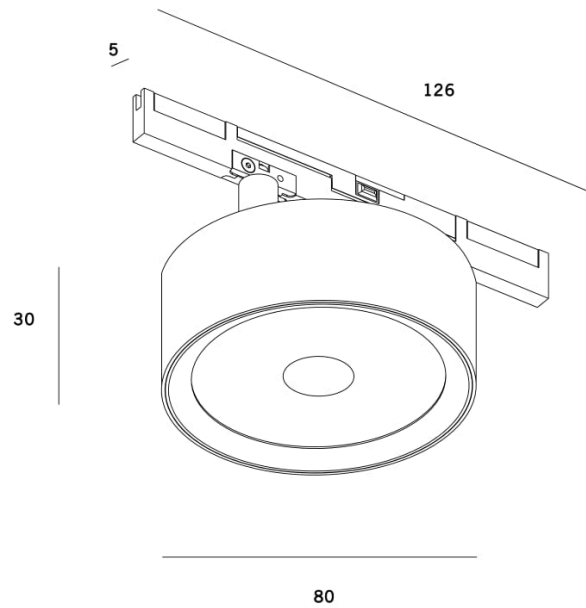


Models

Code	Power	Voltage	CRI	Size	Beam
TW10	10 W	48 V DC	97 CRI	Ø80 × 31 × 126 mm	24° 36°

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for TW10, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

TW10, 10 W, 24° beam

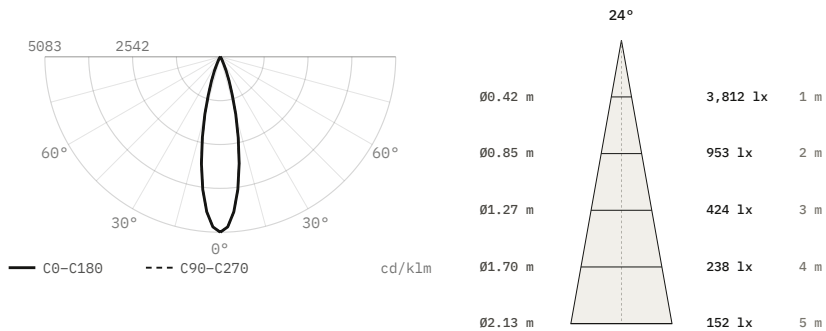

Luminous flux	750 lm
Efficacy	75 lm/W
Peak intensity	3,812 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø80 × 31 mm
Data	Estimated from catalogue data

TW10, 10 W, 36° beam

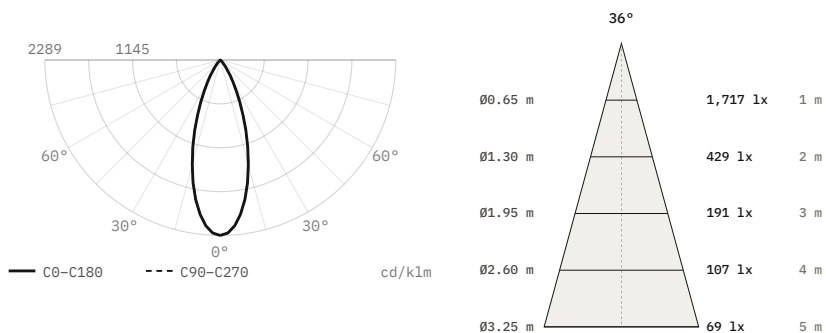

Luminous flux	750 lm
Efficacy	75 lm/W
Peak intensity	1,717 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø80 × 31 mm
Data	Estimated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.