

6 mm system

LT-L

6 mm linear luminaire




Linear luminaire for the 6 mm magnetic track. 8 or 16 W. 40° beam. 3000, 4000 K. 97 CRI.

— LED source: Citizen

— UGR <19

Power	Voltage	Luminous flux
8 W, 16 W	48 V	640–720 lm, 1280–1440 lm
Colour temperature	CRI	Beam angles
3000 K, 4000 K	97 CRI	40°
IP rating	Certifications	Mounting
IP20	CE, RoHS	Magnetic track
Control	Finishes	
On/Off, 0-10V, Triac, Bluetooth	White, Black	

Dimensions

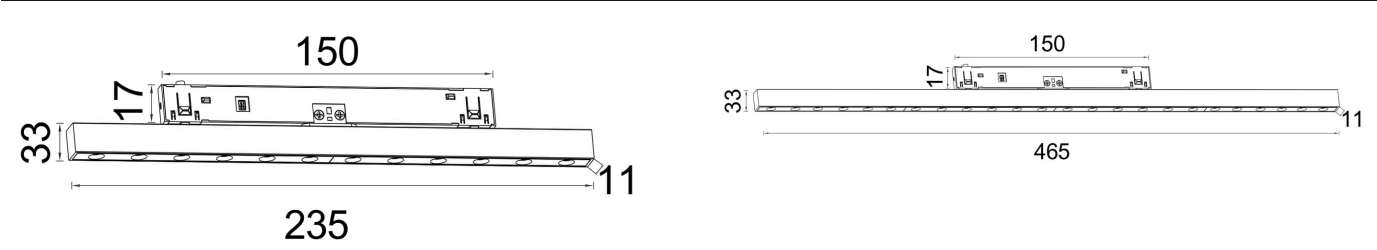

Models

Code	Power	Voltage	Flux	CRI	Size	Beam
LT-L235	8 W	48 V	640–720 lm	97 CRI	235 × 33 × 11 mm; track adapter 150 × 17 mm	40°
LT-L465	16 W	48 V	1280–1440 lm	97 CRI	465 × 33 × 11 mm; track adapter 150 × 17 mm	40°

Finishes



Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for LT-L465, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

LT-L465, 16 W, 40° beam

