

6 mm system

LT-RF

6 mm linear luminaire




Linear luminaire for the 6 mm magnetic track. 6 or 12 W. 70° beam. 3000, 4000 K. 97 CRI.

— LED source: Citizen

— UGR <19

Power	Voltage	Luminous flux
6 W, 12 W	48 V	480–540 lm, 960–1080 lm
Colour temperature	CRI	Beam angles
3000 K, 4000 K	97 CRI	70°
IP rating	Certifications	Mounting
IP20	CE, RoHS	Magnetic track
Control	Finishes	
On/Off, 0-10V, Triac	White, Black	


Dimensions

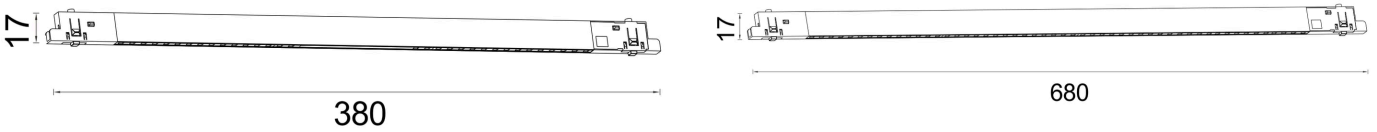

Models

Code	Power	Voltage	Flux	CRI	Size	Beam
LT - RF300	6 W	48 V	480–540 lm	97 CRI	380 × 17 mm	70°
LT - RF600	12 W	48 V	960–1080 lm	97 CRI	680 × 17 mm	70°


Finishes

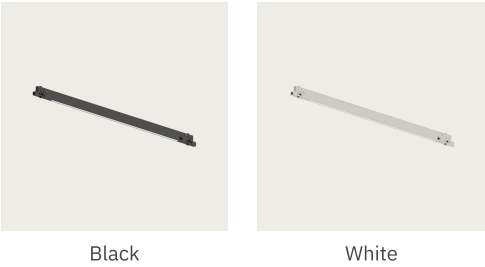

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for LT-RF600, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

LT-RF600, 12 W, 70° beam

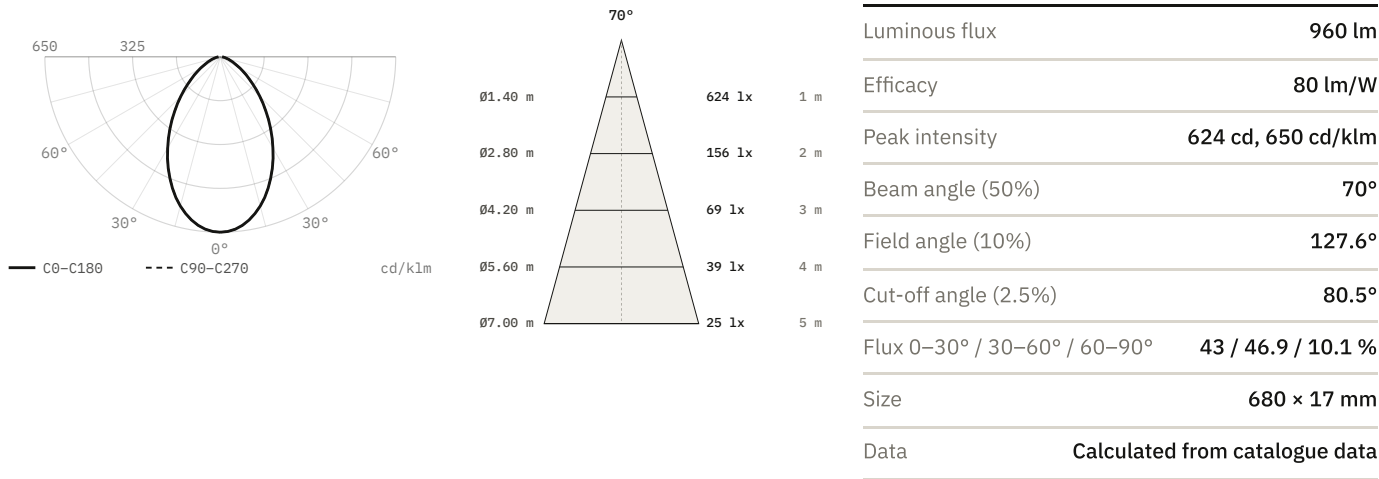

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.