

6 mm system

# LT-S90

6 mm spotlight




Spotlight for the 6 mm magnetic track. 10 W. 70° beam.  
97 CRI.

- LED source: Citizen
- UGR <19

|                            |                            |                                 |
|----------------------------|----------------------------|---------------------------------|
| Power<br>10 W              | Voltage<br>48 V            | Luminous flux<br>800–900 lm     |
| CRI<br>97 CRI              | Beam angles<br>70°         | IP rating<br>IP20               |
| Certifications<br>CE, RoHS | Mounting<br>Magnetic track | Control<br>On/Off, 0-10V, Triac |
| Finishes<br>White, Black   |                            |                                 |

Dimensions

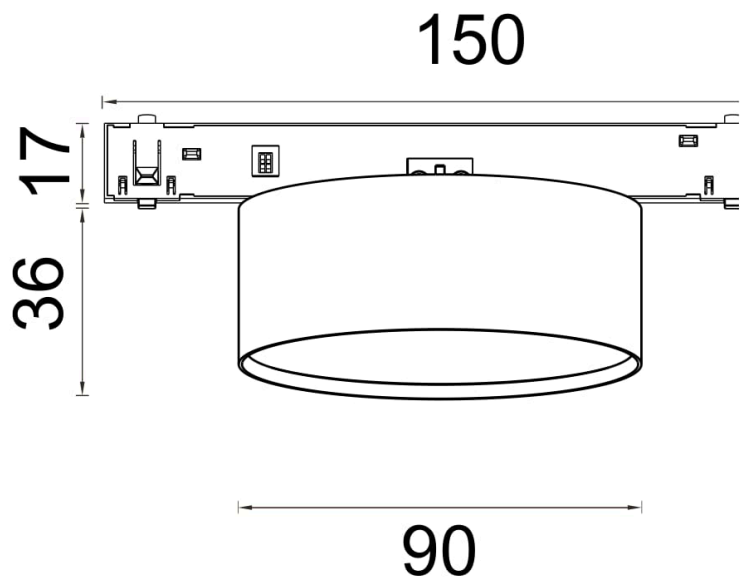

Models

| Code   | Power | Voltage | Flux       | CRI    | Size                                          | Beam |
|--------|-------|---------|------------|--------|-----------------------------------------------|------|
| LT-S90 | 10 W  | 48 V    | 800–900 lm | 97 CRI | Module 150 × 17 mm; body 90 wide x 36 mm high | 70°  |


Finishes



# Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for LT-S90, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

## LT-S90, 10 W, 70° beam

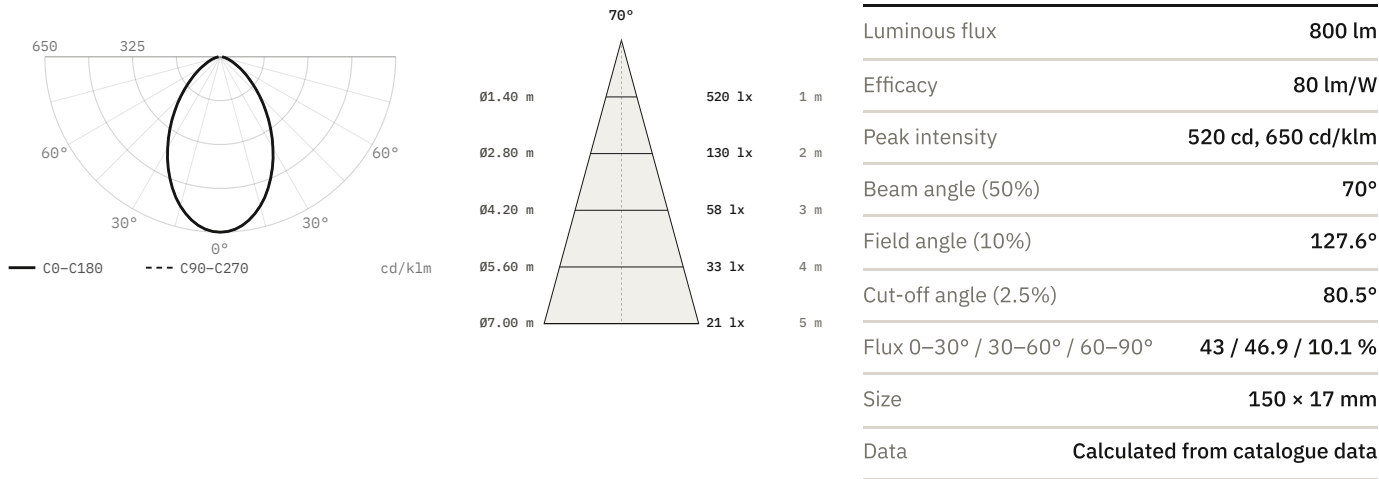

DiaNoche  
service@dianoche.it  
dianoche.it

Technical data may change without notice.