

6 mm system

LT-ZM30

6 mm spotlight




Spotlight for the 6 mm magnetic track. 4 W. 3000, 4000 K. 97 CRI.

- LED source: Citizen
- UGR <19

Power 4 W	Voltage 48 V	Luminous flux 320–360 lm
Colour temperature 3000 K, 4000 K	CRI 97 CRI	IP rating IP20
Certifications CE, RoHS	Mounting Magnetic track	Control On/Off, 0-10V, Triac, Bluetooth
Finishes White, Black		

Dimensions

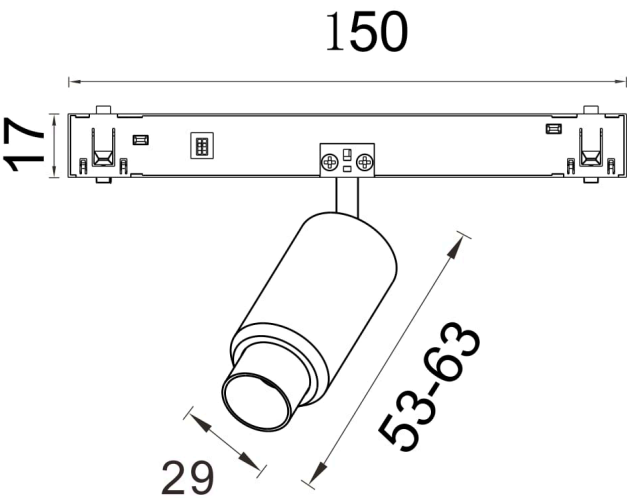

Models

Code	Version	Power	Voltage	Flux	CRI	Size
LT-ZM30	15–60°	4 W	48 V	320–360 lm	97 CRI	29 × 53–63 mm; track adapter 150 × 17 mm

Finishes



Black




White

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for LT-ZM30, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

LT-ZM30, 4 W, wide distribution

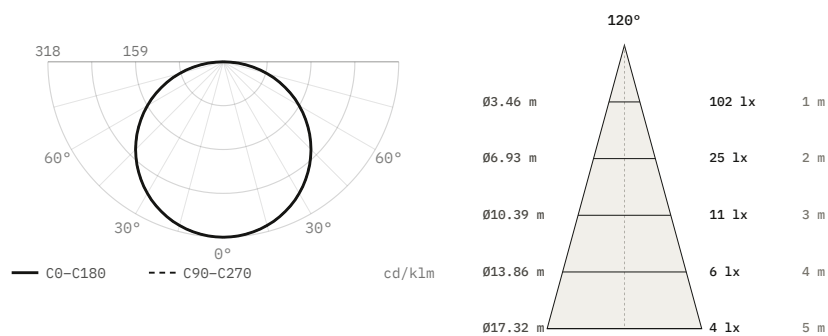

Luminous flux	320 lm
Efficacy	80 lm/W
Peak intensity	102 cd, 318 cd/klm
Beam angle (50%)	120°
Field angle (10%)	168.5°
Cut-off angle (2.5%)	88.5°
Flux 0–30° / 30–60° / 60–90°	25 / 50 / 25 %
Size	53 × 29 × 63 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.