

Moon system

M-P11+D133


Moon pendant



Pendant for the Moon magnetic track. 8 W. 120° beam. — LED source: Citizen
2700, 3000, 4000 K. 97 CRI.

Power 8 W	Voltage 48 V DC	Colour temperature 2700 K, 3000 K, 4000 K
CRI 97 CRI	Beam angles 120°	IP rating IP20
Mounting Suspended, Magnetic track	Control On/Off, Triac	Finishes Black

Dimensions

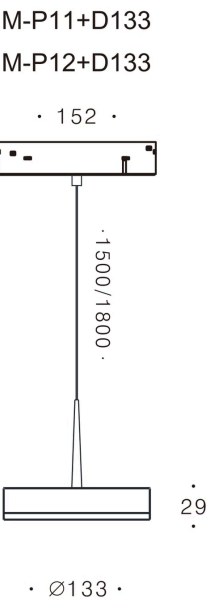


Models

Code	Version	Power	Voltage	CRI	Size	Beam	Notes
M-P11+D133	Ø133, 1500 mm suspension	8 W	48 V DC	97 CRI	Ø133 × 29 mm; suspension 1500 mm; adapter 152 mm	120°	LED 36 V, 200 mA
M-P12+D133	Ø133, 1800 mm suspension	8 W	48 V DC	97 CRI	Ø133 × 29 mm; suspension 1800 mm; adapter 152 mm	120°	LED 36 V, 200 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for M-P11+D133, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

M-P11+D133, 8 W, 120° beam

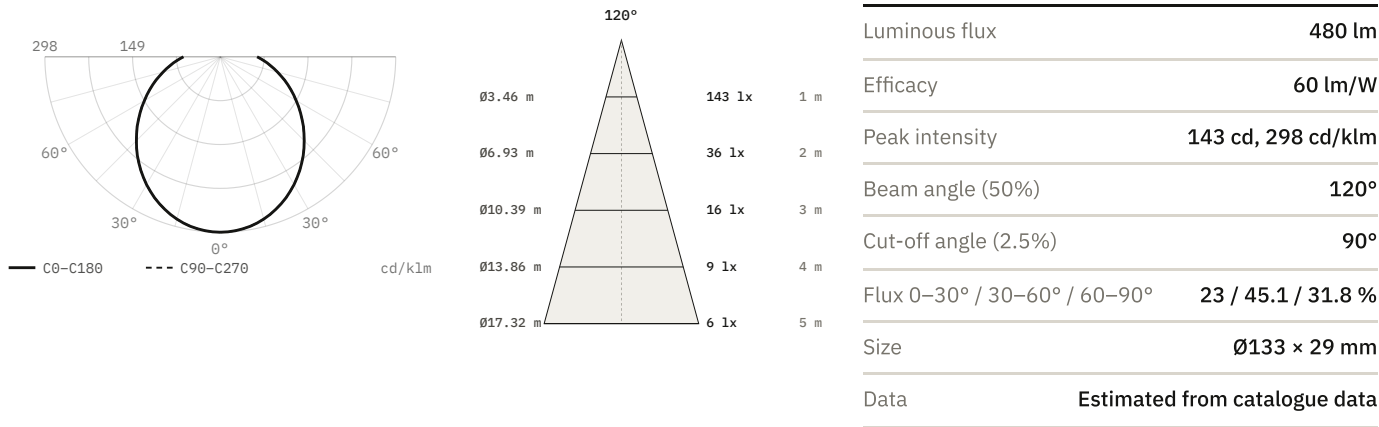

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.