Ceiling

# M1 1004 8°

Surface luminaire




Surface luminaire. 6 W. 8° beam. 2700, 3000, 4000, 5000 K. 97 CRI.

- LED source: Citizen

| Power | Voltage | Colour temperature |
|---|---|---|
| 6 W | 36 V | 2700 K, 3000 K, 4000 K, 5000 K |
| **CRI** | **Beam angles** | **IP rating** |
| 97 CRI | 8° | IP20 |
| **Mounting** | **Control** | **Finishes** |
| Surface | On/Off | White |

## Dimensions

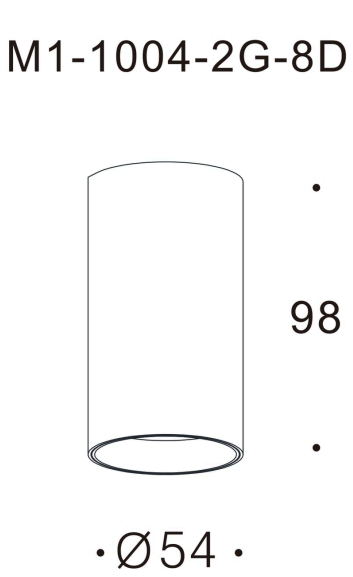



## Models


| Code | Power | Voltage | CRI | Size | Beam | Notes |
|---|---|---|---|---|---|---|
| **M1-1004-2G-8D** | 6 W | 36 V | 97 CRI | Ø54 × 98 mm | 8° | 150 mA |

# Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for M1-1004-2G-8D, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

## M1-1004-2G-8D, 6 W, 8° beam

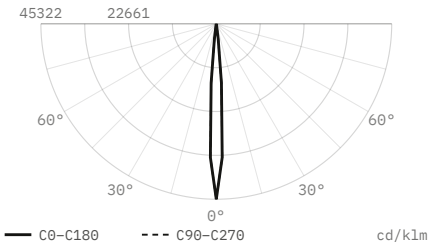

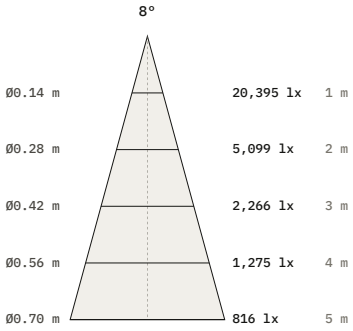
| | |
|---|---|
| Luminous flux | 450 lm |
| Efficacy | 75 lm/W |
| Peak intensity | 20,395 cd, 45,322 cd/klm |
| Beam angle (50%) | 8° |
| Field angle (10%) | 14.6° |
| Cut-off angle (2.5%) | 9° |
| Flux 0–30° / 30–60° / 60–90° | 100 / 0 / 0 % |
| Size | Ø54 × 98 mm |
| Data | Estimated from catalogue data |

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.