

Slim 15 mm system

Cone Pendant CL-A

Slim 15 mm pendant



Pendant for the Slim 15 mm magnetic track. 7 W. Three beam angles, 24° to 50°. 3000, 4000, 5000 K. 97 CRI.

— LED source: Citizen

Power
7 W

Voltage
48 V DC

Colour temperature
3000 K, 4000 K, 5000 K

CRI
97 CRI


Beam angles
24°, 36°, 50°

Mounting
Magnetic track, Suspended

Control
Casambi, Tuya, DALI, 0-10V

Finishes
White, Black, Silver, Nickel, Gold

Dimensions

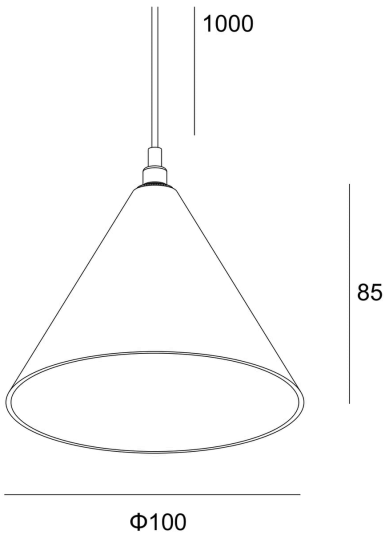

Models

Code	Power	Voltage	CRI	Size	Beam
M15-CL-A	7 W	48 V DC	97 CRI	Ø100 × 85 × 1000 mm	24° 36° 50°


Finishes



Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for M15-CL-A, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

M15-CL-A, 7 W, 24° beam

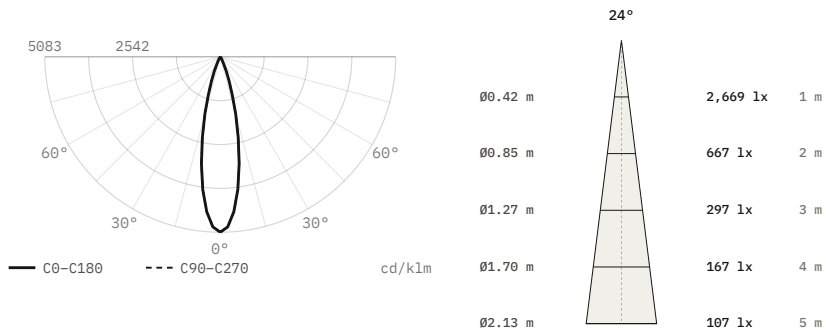


Luminous flux	525 lm
Efficacy	75 lm/W
Peak intensity	2,669 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø100 × 85 mm
Data	Estimated from catalogue data

M15-CL-A, 7 W, 36° beam

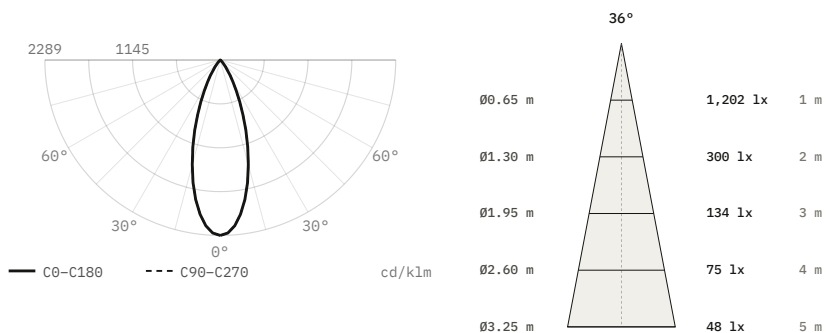

Luminous flux	525 lm
Efficacy	75 lm/W
Peak intensity	1,202 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø100 × 85 mm
Data	Estimated from catalogue data

M15-CL-A, 7 W, 50° beam

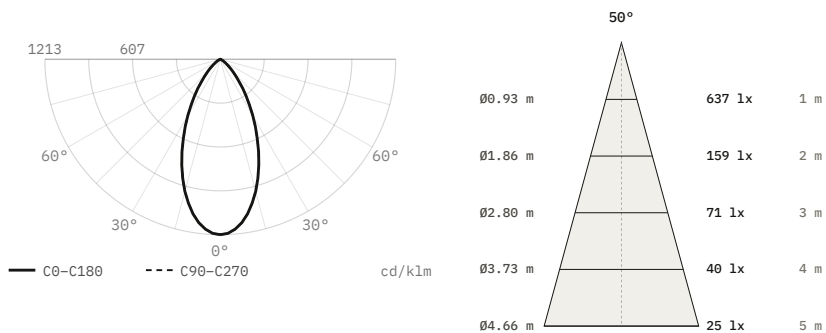

Luminous flux	525 lm
Efficacy	75 lm/W
Peak intensity	637 cd, 1,213 cd/klm
Beam angle (50%)	50°
Field angle (10%)	91.1°
Cut-off angle (2.5%)	57.5°
Flux 0–30° / 30–60° / 60–90°	64.8 / 33.6 / 1.5 %
Size	Ø100 × 85 mm
Data	Estimated from catalogue data

