

Slim 15 mm system

Direct Line GL

Slim 15 mm linear luminaire




Linear luminaire for the Slim 15 mm magnetic track. 6 or 12 W. 60° beam. 3000, 4000, 5000 K. 97 CRI.

— LED source: Citizen

Power 6 W, 12 W	Voltage 48 V DC	Colour temperature 3000 K, 4000 K, 5000 K
CRI 97 CRI	Beam angles 60°	Mounting Magnetic track
Control Casambi, Tuya, DALI, 0-10V	Finishes White, Black, Silver, Nickel, Gold	

Dimensions

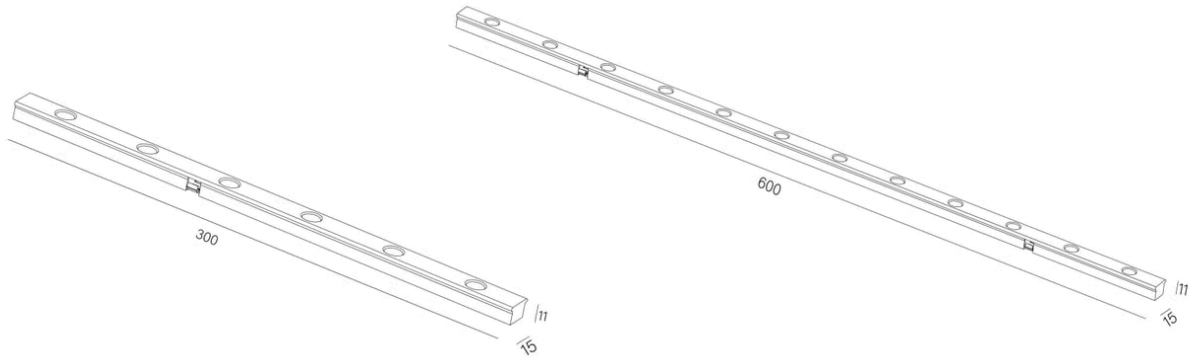

Models

Code	Version	Power	Voltage	CRI	Size	Beam
M15-GL300	300 mm	6 W	48 V DC	97 CRI	300 × 15 × 11 mm	60°
M15-GL600	600 mm	12 W	48 V DC	97 CRI	600 × 15 × 11 mm	60°

Finishes



Gold



Nickel



Black




White

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for M15-GL600, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

M15-GL600, 12 W, 60° beam

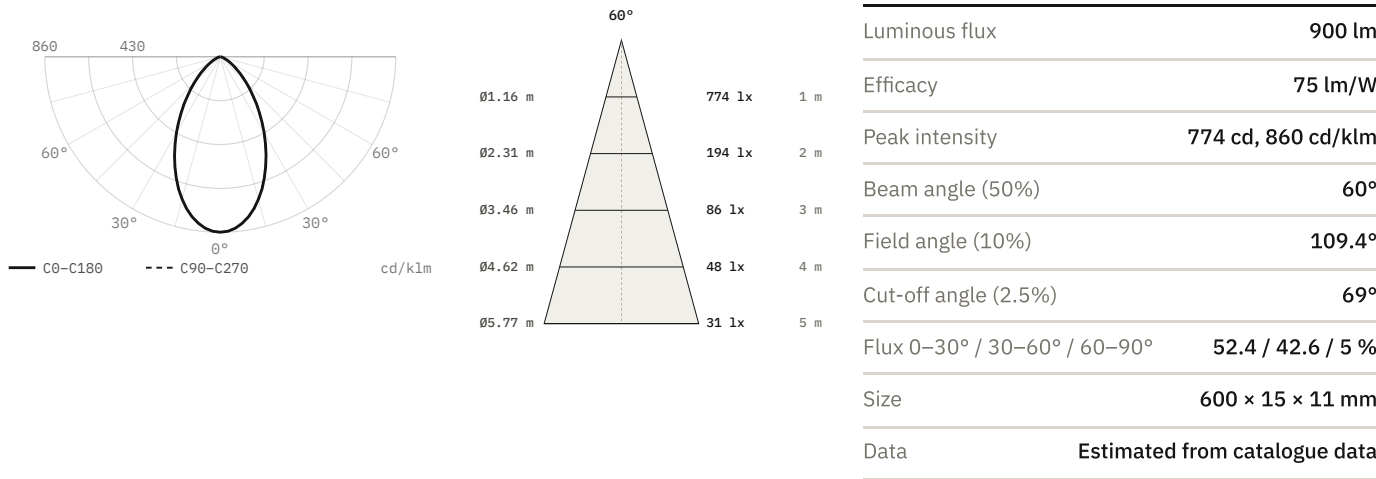

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.