

Surface

M3

Surface luminaire




Surface luminaire. 18 or 25 W. 2700, 3000, 4000, 5000 K. IP54. 97 CRI.

— LED source: Citizen

Power	Voltage	Colour temperature
18 W, 25 W	36 V	2700 K, 3000 K, 4000 K, 5000 K
CRI	IP rating	Mounting
97 CRI	IP54	Surface
Control	Finishes	
On/Off, Triac	Black	

Dimensions


18W



•
102
•

• Ø172 •

25W

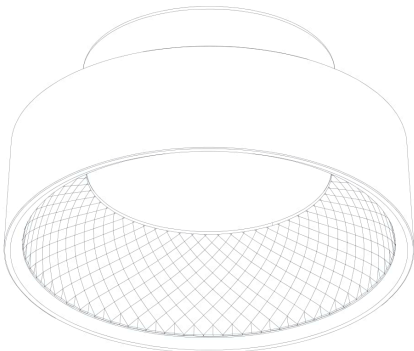

•
118
•

• Ø228 •


Models

Code	Power	Voltage	CRI	Size	Notes
SU-M3-1801	18 W	36 V	97 CRI	Ø172 × 102 mm	450 mA
SU-M3-2501	25 W	36 V	97 CRI	Ø228 × 118 mm	600 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for SU-M3-2501, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

SU-M3-2501, 25 W, wide distribution

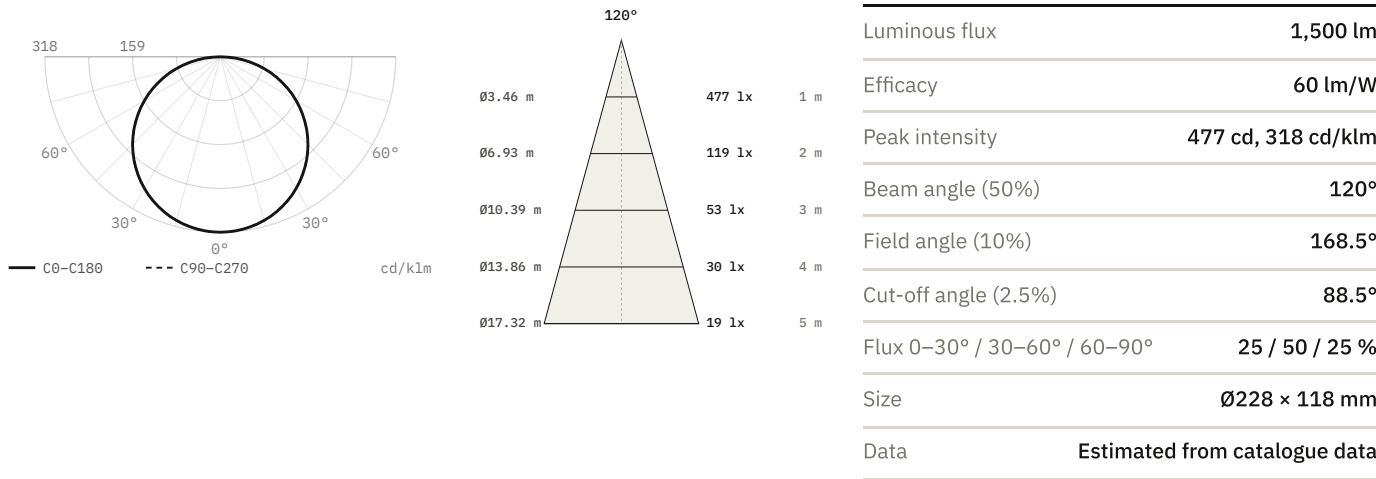

DiaNoche
Via Tortona, 31, 20144 Milano MI, Italy
service@dianoche.it
dianoche.it

Technical data may change without notice.