Ceiling

M37 1201

Surface luminaire




Surface luminaire. 12 W. 110° beam. 2700, 3000, 4000, 5000 K. IP44. 97 CRI.

- LED source: Citizen

Power **12 W**	Voltage **36 V**	Colour temperature **2700 K, 3000 K, 4000 K, 5000 K**
CRI **97 CRI**	Beam angles **110°**	IP rating **IP44**
Mounting **Surface**	Control **On/Off**	Finishes **White**

Dimensions

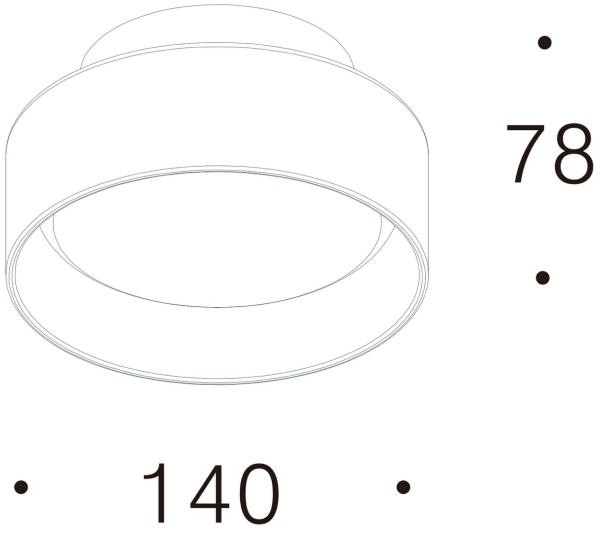


Models


Code	Power	Voltage	CRI	Size	Beam	Notes
M37-1201	12 W	36 V	97 CRI	Ø140 × 78 mm	110°	300 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for M37-1201, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

M37-1201, 12 W, 110° beam

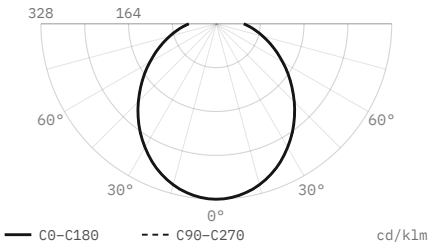

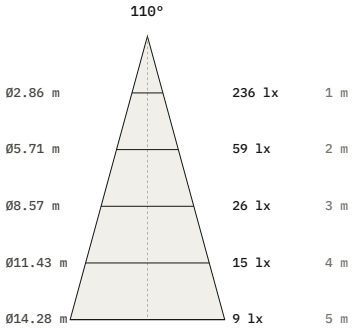

Luminous flux	**720 lm**
Efficacy	**60 lm/W**
Peak intensity	**236 cd, 328 cd/klm**
Beam angle (50%)	**110°**
Cut-off angle (2.5%)	**90°**
Flux 0–30° / 30–60° / 60–90°	**25 / 46.2 / 28.8 %**
Size	**Ø140 × 78 mm**
Data	**Estimated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.