Ceiling

M37 2001

Surface luminaire




Surface luminaire. 18 W. 110° beam. 2700, 3000, 4000, 5000 K. IP44. 97 CRI.

- LED source: Citizen

Power	Voltage	Colour temperature
18 W	36 V	2700 K, 3000 K, 4000 K, 5000 K
CRI	**Beam angles**	**IP rating**
97 CRI	110°	IP44
Mounting	**Control**	**Finishes**
Surface	On/Off	White

Dimensions

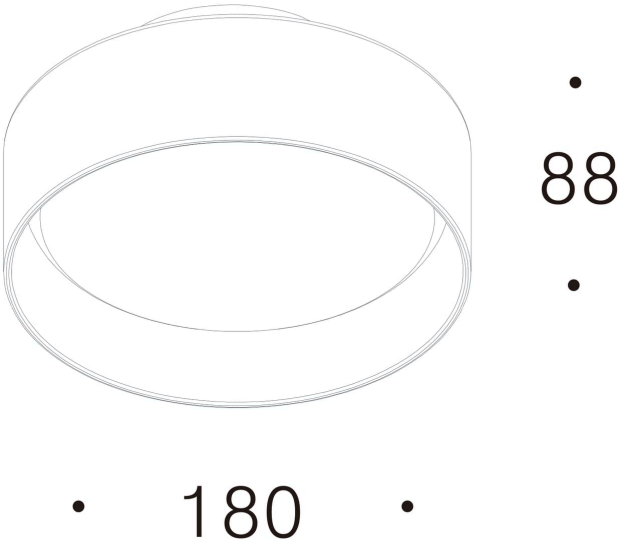


Models


Code	Power	Voltage	CRI	Size	Beam	Notes
M37-2001	18 W	36 V	97 CRI	Ø180 × 88 mm	110°	450 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for M37-2001, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

M37-2001, 18 W, 110° beam

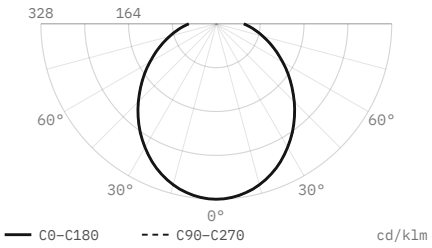

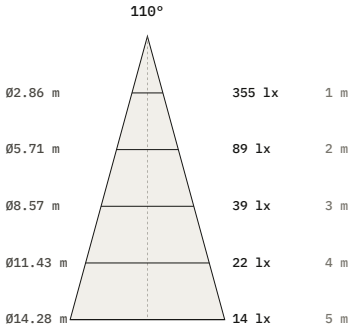

Luminous flux	1,080 lm
Efficacy	60 lm/W
Peak intensity	355 cd, 328 cd/klm
Beam angle (50%)	110°
Cut-off angle (2.5%)	90°
Flux 0–30° / 30–60° / 60–90°	25 / 46.2 / 28.8 %
Size	Ø180 × 88 mm
Data	Estimated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.