

Recessed

Maxi DL1266

Recessed spotlight




Recessed spotlight. 7, 10 or 13 W. Four beam angles, 15° to 50°. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø58 / Ø78 mm
- LED source: Citizen

Power 7 W, 10 W, 13 W	Luminous flux 630 lm, 960 lm, 1180 lm	Colour temperature 2700 K, 3000 K, 4000 K
CRI 97 CRI	Beam angles 15°, 24°, 36°, 50°	IP rating IP20
Certifications CE	Mounting Recessed	Finishes Black

Dimensions

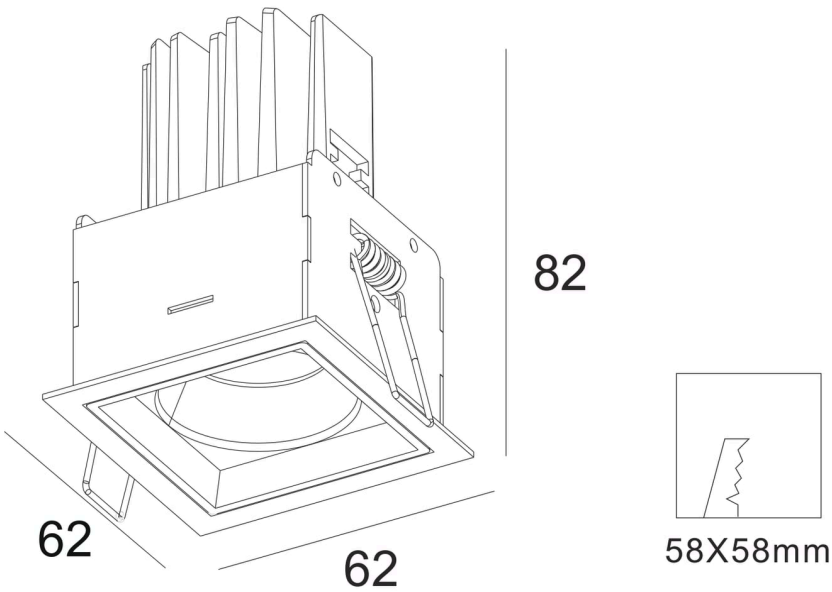


Models

Code	Power	Flux	CRI	Size	Cut-out	Beam	Notes
DL1266	7 W	630 lm	97 CRI	62 × 62 x H82 mm	Ø58 mm	15° 24° 36° 50°	350 / 500 mA
DL1266	10 W	960 lm	97 CRI	62 × 62 x H82 mm	Ø58 mm	15° 24° 36° 50°	350 / 500 mA
DL1262	13 W	1180 lm	97 CRI	86 × 86 x H85 mm	Ø78 mm	15° 24° 36° 50°	350 mA

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1262, from the same data as the IES and LDT files on the product page. Curves marked measured come from goniophotometer tests in the laboratory; the others are calculated from catalogue data, not measured.

DL1262, 13 W, 3000 K, 24.1° beam, measured

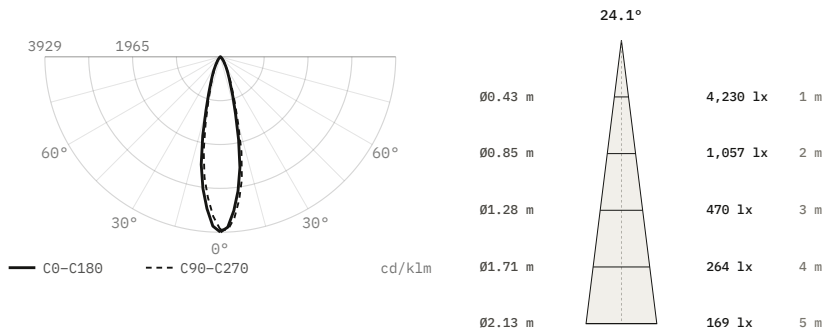


Luminous flux	1,077 lm
Efficacy	83 lm/W
Peak intensity	4,232 cd, 3,929 cd/klm
Beam angle (50%)	24.1°
Field angle (10%)	49.2°
Cut-off angle (2.5%)	41°
Flux 0–30° / 30–60° / 60–90°	85.7 / 13.6 / 0.8 %
Size	86 × 86 × 85 mm
Data	Measured with a goniophotometer (EVERFINE GO-2000B), 22 August 2025

DL1262, 13 W, 15° beam

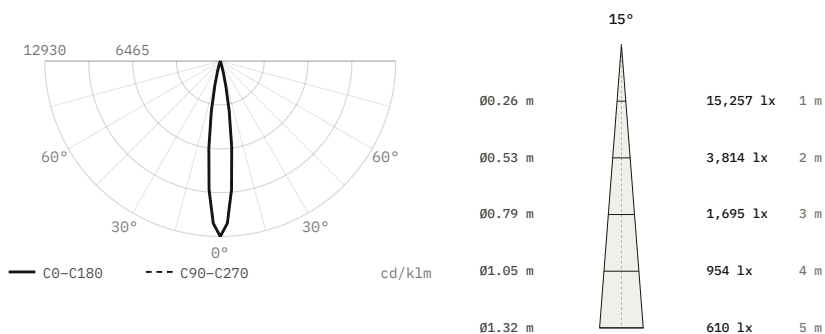


Luminous flux	1,180 lm
Efficacy	91 lm/W
Peak intensity	15,257 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	86 × 86 × 85 mm
Data	Calculated from catalogue data

DL1262, 13 W, 24° beam

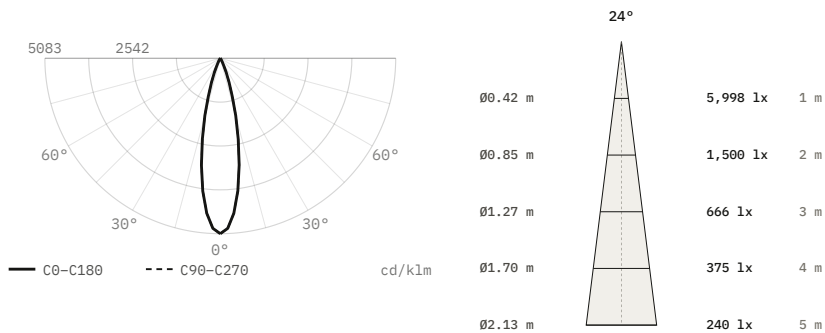


Luminous flux	1,180 lm
Efficacy	91 lm/W
Peak intensity	5,998 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	86 × 86 × 85 mm
Data	Calculated from catalogue data

DL1262, 13 W, 36° beam

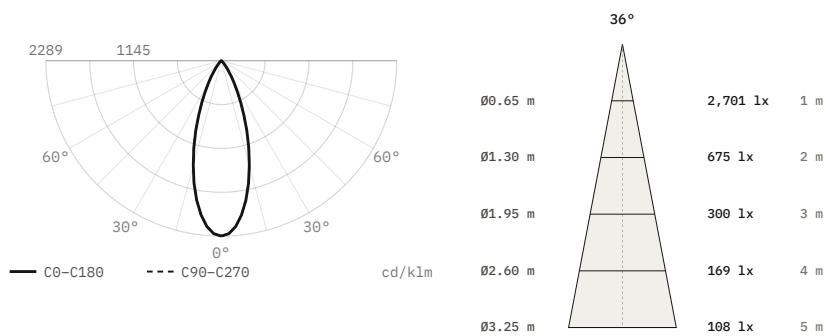

Luminous flux	1,180 lm
Efficacy	91 lm/W
Peak intensity	2,701 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	86 × 86 × 85 mm
Data	Calculated from catalogue data

DL1262, 13 W, 50° beam

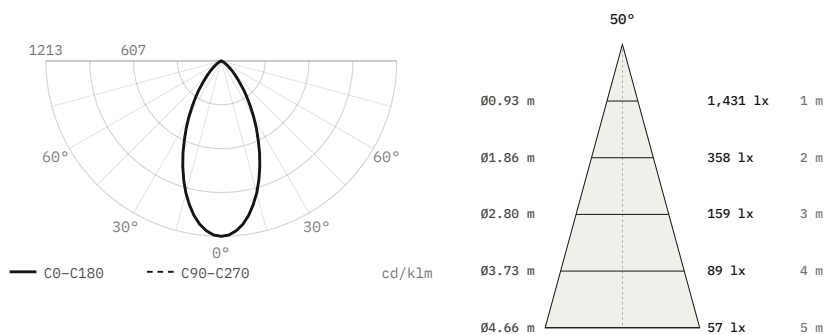

Luminous flux	1,180 lm
Efficacy	91 lm/W
Peak intensity	1,431 cd, 1,213 cd/klm
Beam angle (50%)	50°
Field angle (10%)	91.1°
Cut-off angle (2.5%)	57.5°
Flux 0–30° / 30–60° / 60–90°	64.8 / 33.6 / 1.5 %
Size	86 × 86 × 85 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.