

Recessed

Maxi DL1329

Recessed spotlight




Recessed spotlight. 18 or 26 W. Four beam angles, 15° to 50°. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø110 mm
- LED source: Citizen

Power 18 W, 26 W	Voltage max 37 V	Luminous flux 1800 lm, 2600 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 15°, 24°, 36°, 50°
IP rating IP20	Certifications CE	Mounting Recessed

Dimensions

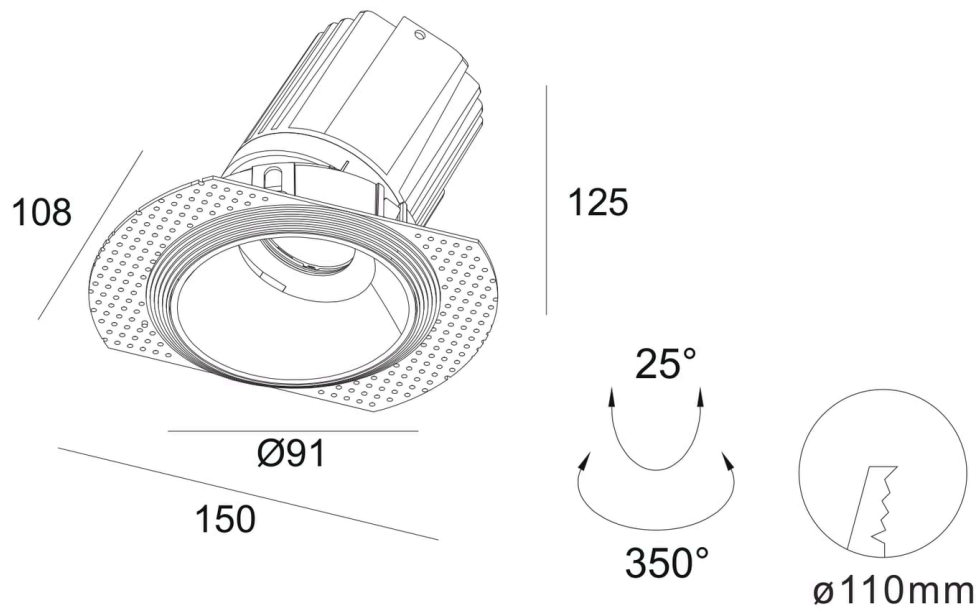


Models

Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1329	18 W	max 37 V	1800 lm	97 CRI	Ø91 x H125, plate 150 x 108 mm	Ø110 mm	15° 24° 36° 50°	500 mA
DL1155	26 W	max 37 V	2600 lm	97 CRI	Ø91 x H125, plate 150 x 108 mm	Ø110 mm	15° 24° 36° 50°	700 mA

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1329, from the same data as the IES and LDT files on the product page. Curves marked measured come from goniophotometer tests in the laboratory; the others are calculated from catalogue data, not measured.

DL1329, 17.9 W, 3000 K, 30.8° beam, measured

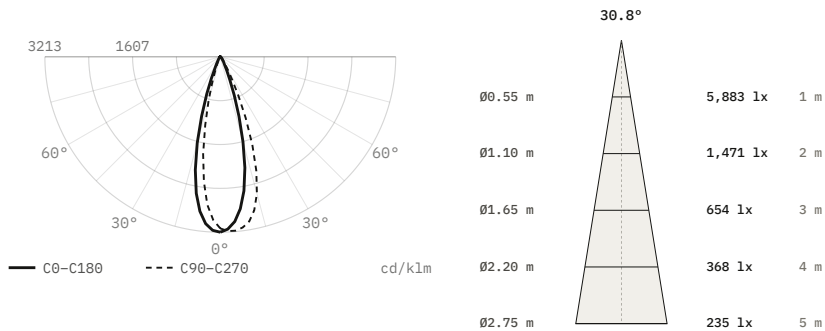


Luminous flux	1,831 lm
Efficacy	102 lm/W
Peak intensity	5,883 cd, 3,213 cd/klm
Beam angle (50%)	30.8°
Field angle (10%)	48.5°
Cut-off angle (2.5%)	39°
Flux 0–30° / 30–60° / 60–90°	90.9 / 7.9 / 1.2 %
Size	Ø91 × 125 mm
Data	Measured with a goniophotometer (EVERFINE GO-2000B), 22 August 2025

DL1329, 18 W, 15° beam

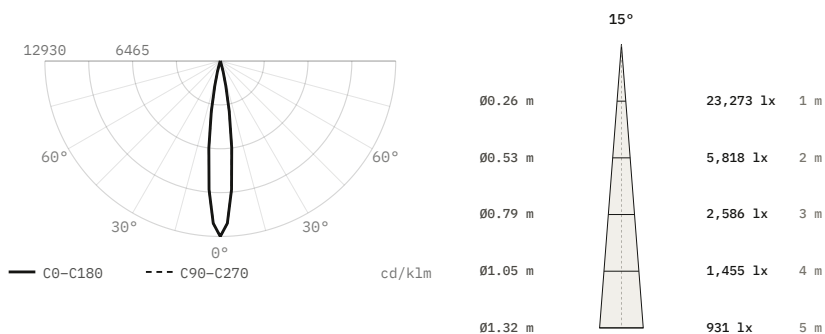


Luminous flux	1,800 lm
Efficacy	100 lm/W
Peak intensity	23,273 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø91 × 125 mm
Data	Calculated from catalogue data

DL1329, 18 W, 24° beam

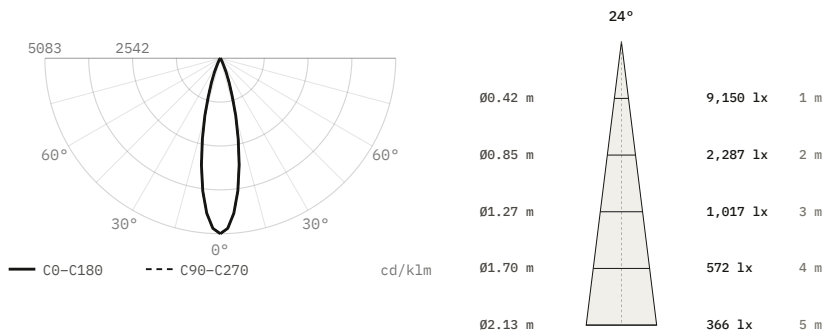


Luminous flux	1,800 lm
Efficacy	100 lm/W
Peak intensity	9,150 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø91 × 125 mm
Data	Calculated from catalogue data

DL1329, 18 W, 36° beam

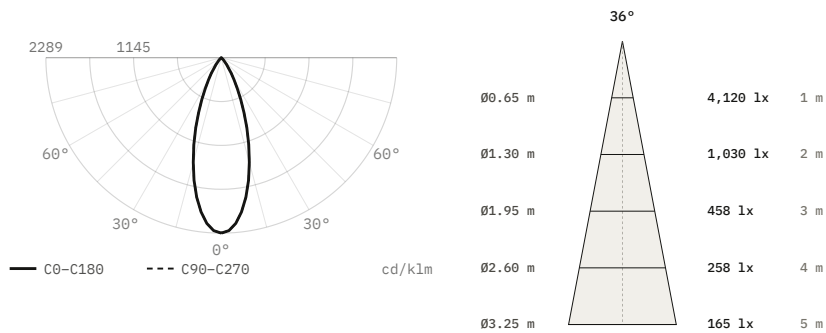

Luminous flux	1,800 lm
Efficacy	100 lm/W
Peak intensity	4,120 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø91 × 125 mm
Data	Calculated from catalogue data

DL1329, 18 W, 50° beam

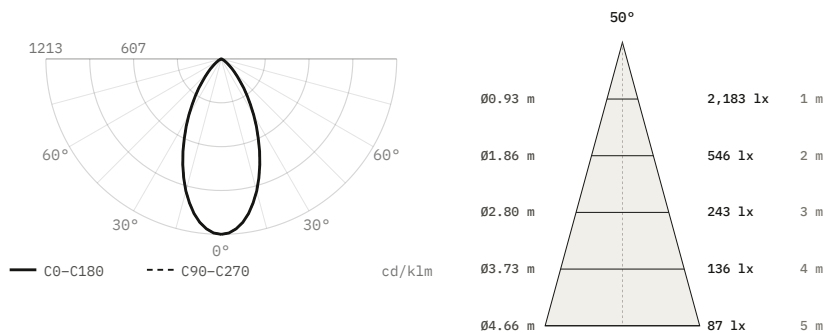

Luminous flux	1,800 lm
Efficacy	100 lm/W
Peak intensity	2,183 cd, 1,213 cd/klm
Beam angle (50%)	50°
Field angle (10%)	91.1°
Cut-off angle (2.5%)	57.5°
Flux 0–30° / 30–60° / 60–90°	64.8 / 33.6 / 1.5 %
Size	Ø91 × 125 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.