

Recessed

Maxi DL1331

Recessed spotlight




Recessed spotlight. 18 or 26 W. Four beam angles, 15° to 50°. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø105 mm
- LED source: Citizen

Power 18 W, 26 W	Voltage max 37 V	Luminous flux 1800 lm, 2600 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 15°, 24°, 36°, 50°
IP rating IP20	Certifications CE	Mounting Recessed

Dimensions

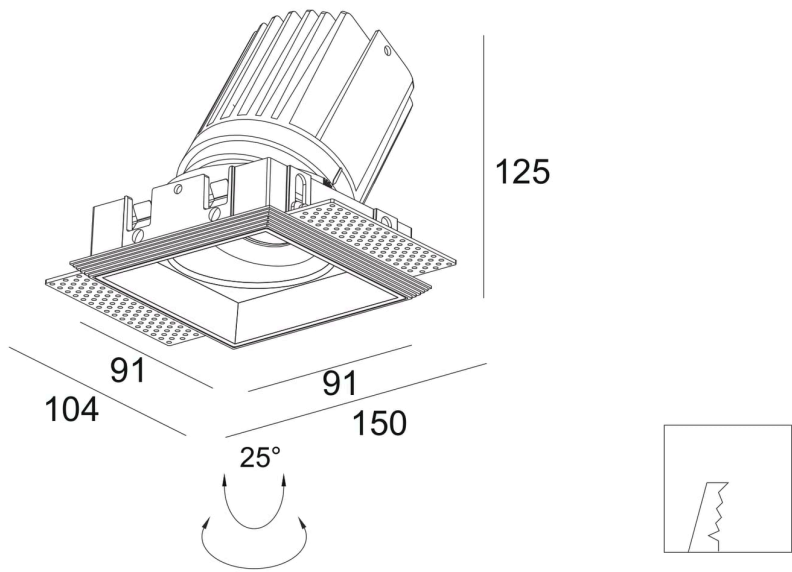


Models

Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1331	18 W	max 37 V	1800 lm	97 CRI	Frame 91 × 91, plate 150 × 104, H125 mm	Ø105 mm	15° 24° 36° 50°	500 mA
DL1157	26 W	max 37 V	2600 lm	97 CRI	Frame 91 × 91, plate 150 × 104, H125 mm	Ø105 mm	15° 24° 36° 50°	700 mA

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1157, from the same data as the IES and LDT files on the product page. Curves marked measured come from goniophotometer tests in the laboratory; the others are calculated from catalogue data, not measured.

DL1157, 26 W, 90 K, 31.4° beam, measured

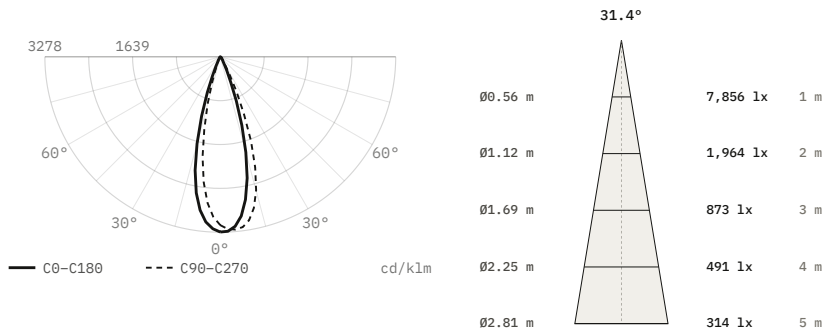


Luminous flux	2,399 lm
Efficacy	92 lm/W
Peak intensity	7,865 cd, 3,278 cd/klm
Beam angle (50%)	31.4°
Field angle (10%)	47.6°
Cut-off angle (2.5%)	36°
Flux 0–30° / 30–60° / 60–90°	92.7 / 6.4 / 0.9 %
Size	91 × 91 × 150 mm
Data	Measured with a goniophotometer (EVERFINE GO-2000B), 26 August 2025

DL1157, 26 W, 15° beam

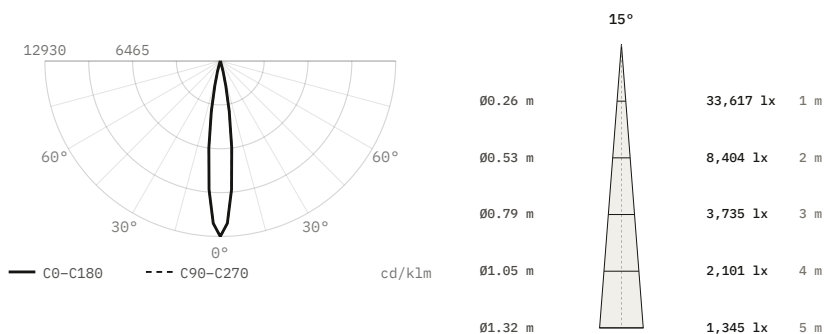


Luminous flux	2,600 lm
Efficacy	100 lm/W
Peak intensity	33,617 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	91 × 91 × 150 mm
Data	Calculated from catalogue data

DL1157, 26 W, 24° beam

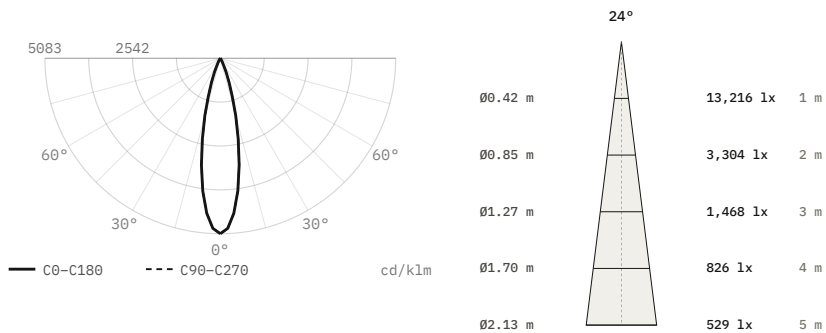


Luminous flux	2,600 lm
Efficacy	100 lm/W
Peak intensity	13,216 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	91 × 91 × 150 mm
Data	Calculated from catalogue data

DL1157, 26 W, 36° beam

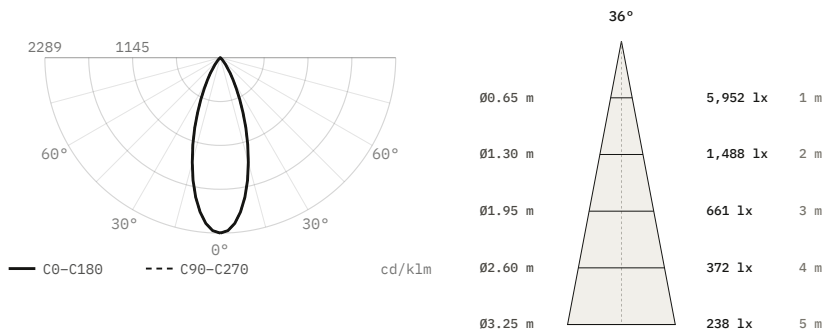

Luminous flux	2,600 lm
Efficacy	100 lm/W
Peak intensity	5,952 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	91 × 91 × 150 mm
Data	Calculated from catalogue data

DL1157, 26 W, 50° beam

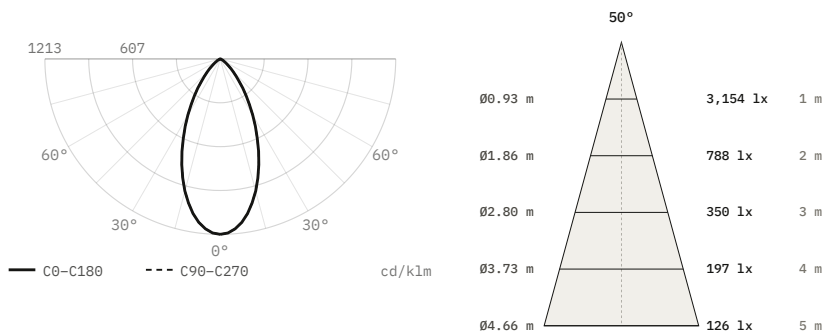

Luminous flux	2,600 lm
Efficacy	100 lm/W
Peak intensity	3,154 cd, 1,213 cd/klm
Beam angle (50%)	50°
Field angle (10%)	91.1°
Cut-off angle (2.5%)	57.5°
Flux 0–30° / 30–60° / 60–90°	64.8 / 33.6 / 1.5 %
Size	91 × 91 × 150 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.