

Recessed

Maxi DL1475

Recessed spotlight




Recessed spotlight. 7, 10 or 13 W. Four beam angles, 15° to 55°. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø75 mm
- LED source: Citizen

Power 7 W, 10 W, 13 W	Voltage max 19 V, max 37 V	Luminous flux 630 lm, 900 lm, 1180 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 15°, 24°, 36°, 55°
IP rating IP20	Certifications CE	Mounting Recessed

Dimensions

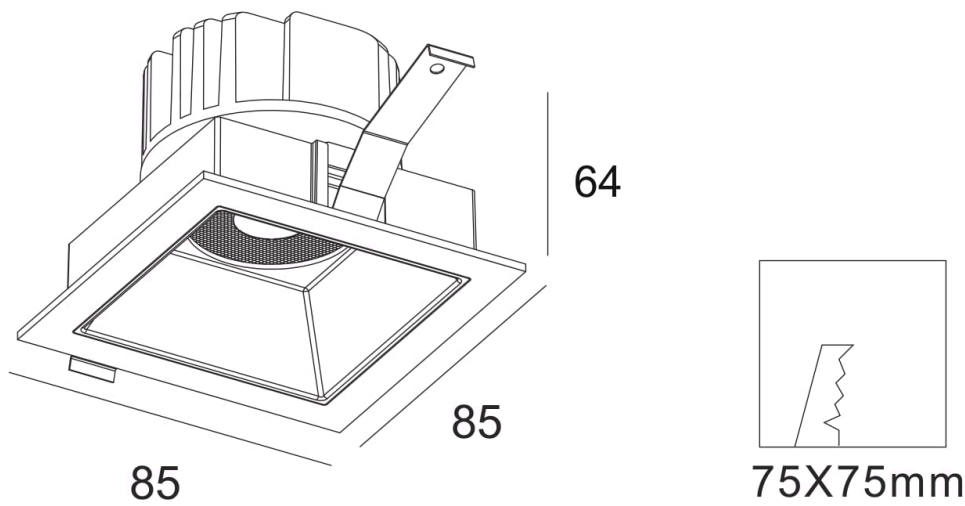


Models

Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1475	7 W	max 19 V	630 lm	97 CRI	85 × 85 x H64 mm	Ø75 mm	15° 24° 36° 55°	350 mA
DL1126	10 W	max 19 V	900 lm	97 CRI	85 × 85 x H89 mm	Ø75 mm	15° 24° 36° 55°	500 mA
DL0065	13 W	max 37 V	1180 lm	97 CRI	85 × 85 x H89 mm	Ø75 mm	15° 24° 36° 55°	350 mA

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL0065, from the same data as the IES and LDT files on the product page. Curves marked measured come from goniophotometer tests in the laboratory; the others are calculated from catalogue data, not measured.

DL0065, 13 W, 3000 K, 34° beam, measured

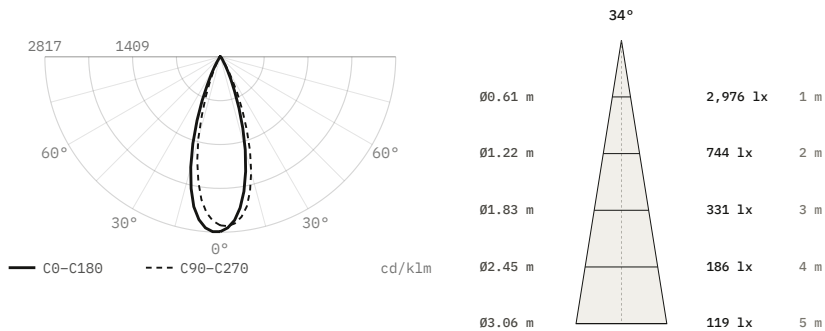


Luminous flux	1,060 lm
Efficacy	82 lm/W
Peak intensity	2,986 cd, 2,817 cd/klm
Beam angle (50%)	34°
Field angle (10%)	54.8°
Cut-off angle (2.5%)	37°
Flux 0–30° / 30–60° / 60–90°	92 / 7.2 / 0.7 %
Size	85 × 85 × 89 mm
Data	Measured with a goniophotometer (EVERFINE GO-2000B), 27 August 2025

DL0065, 13 W, 15° beam

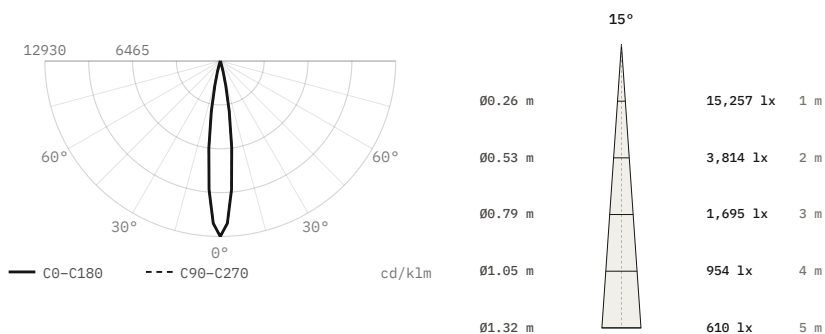


Luminous flux	1,180 lm
Efficacy	91 lm/W
Peak intensity	15,257 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	85 × 85 × 89 mm
Data	Calculated from catalogue data

DL0065, 13 W, 24° beam

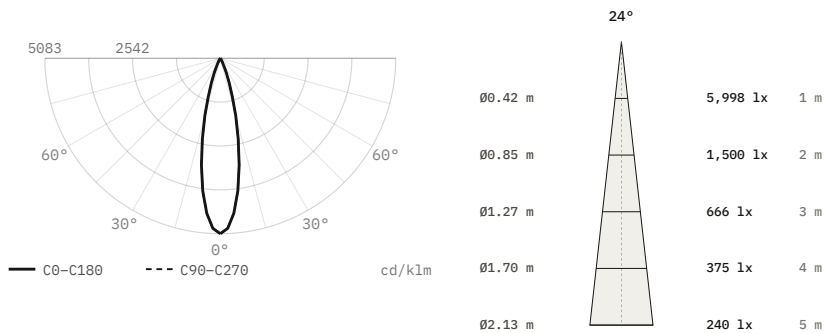


Luminous flux	1,180 lm
Efficacy	91 lm/W
Peak intensity	5,998 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	85 × 85 × 89 mm
Data	Calculated from catalogue data

DL0065, 13 W, 36° beam

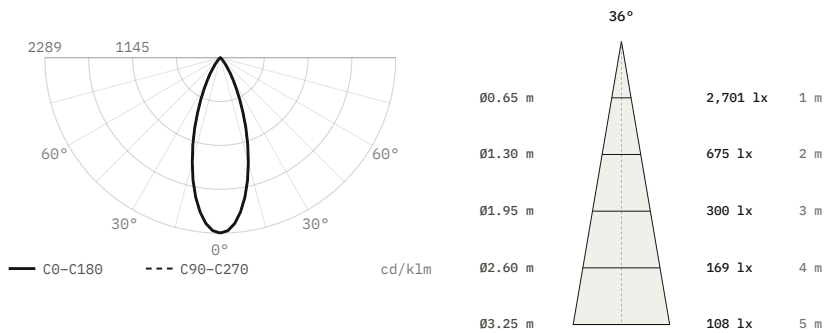

Luminous flux	1,180 lm
Efficacy	91 lm/W
Peak intensity	2,701 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	85 × 85 × 89 mm
Data	Calculated from catalogue data

DL0065, 13 W, 55° beam

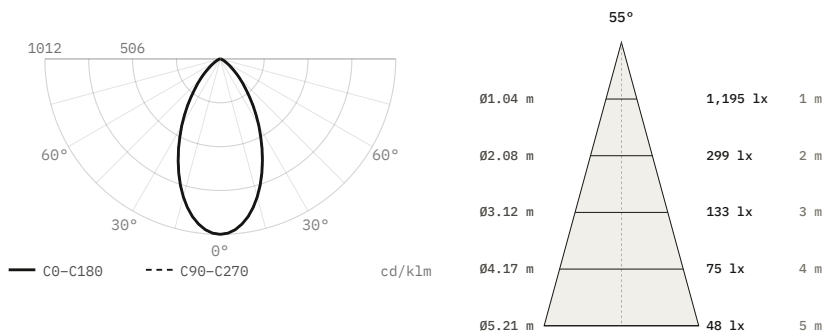

Luminous flux	1,180 lm
Efficacy	91 lm/W
Peak intensity	1,195 cd, 1,012 cd/klm
Beam angle (50%)	55°
Field angle (10%)	100.2°
Cut-off angle (2.5%)	63°
Flux 0–30° / 30–60° / 60–90°	58.2 / 38.8 / 3 %
Size	85 × 85 × 89 mm
Data	Calculated from catalogue data