

Recessed

Maxi DL1494

Recessed spotlight




Recessed spotlight. 18 or 26 W. 2700, 3000, 4000 K.
97 CRI.

- Ceiling cut-out Ø105 mm
- LED source: Citizen

Power	Voltage	Luminous flux
18 W, 26 W	max 37 V	1800 lm, 2600 lm
Colour temperature	CRI	IP rating
2700 K, 3000 K, 4000 K	97 CRI	IP20
Certifications	Mounting	
CE	Recessed	

Dimensions

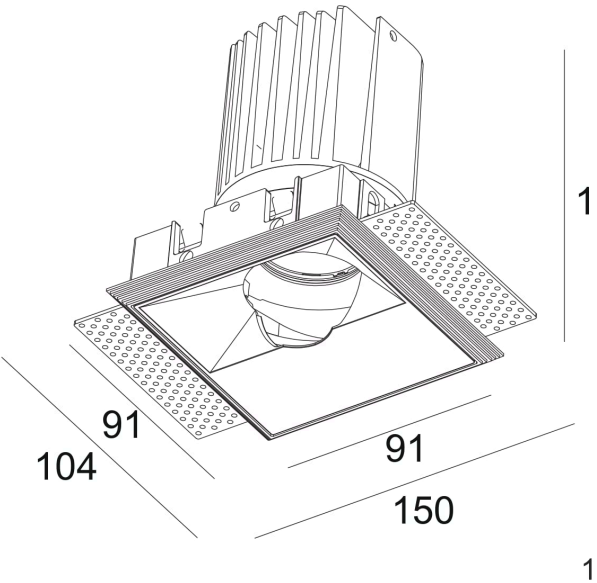


Models

Code	Version	Power	Voltage	Flux	CRI	Size	Cut-out	Notes
DL1494	Wall washer	18 W	max 37 V	1800 lm	97 CRI	Frame 91 × 91, plate 150 × 104, H125 mm	Ø105 mm	500 mA
DL1368	Wall washer	26 W	max 37 V	2600 lm	97 CRI	Frame 91 × 91, plate 150 × 104, H125 mm	Ø105 mm	700 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1368, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1368, 26 W, wall washer

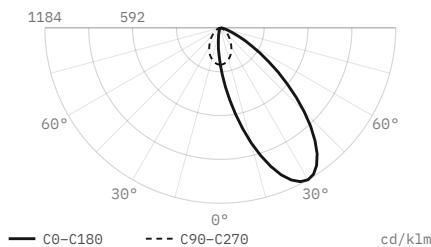

Luminous flux	2,600 lm
Efficacy	100 lm/W
Peak intensity	3,077 cd, 1,184 cd/klm
Beam angle (50%)	asymmetric
Cut-off angle (2.5%)	80°
Flux 0–30° / 30–60° / 60–90°	29.6 / 61.1 / 9.3 %
Size	91 × 91 × 150 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.