


Recessed

Maxi DL1726

Recessed spotlight

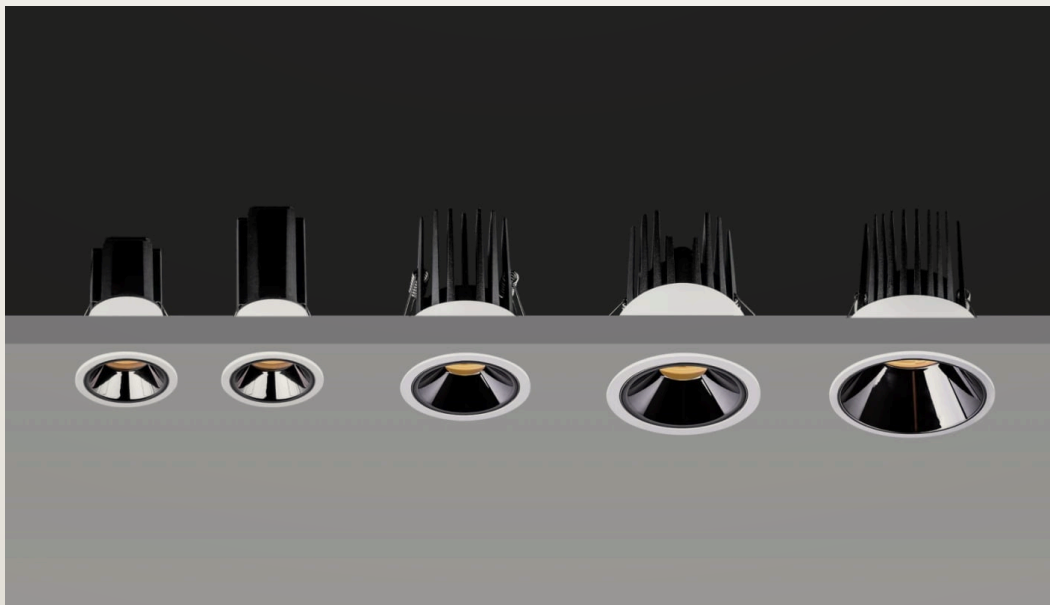

Recessed spotlight. 7, 13 or 26 W. Four beam angles, 15° to 50°. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø35 / Ø75 / Ø95 mm
- LED source: Citizen

Power
7 W, 13 W, 26 W

Luminous flux
560 lm, 1180 lm, 2600 lm

Colour temperature
2700 K, 3000 K, 4000 K

CRI
97 CRI

Beam angles
15°, 24°, 36°, 50°

IP rating
IP20

Certifications
CE

Mounting
Recessed

Finishes
Black


Models

Code	Power	Flux	CRI	Size	Cut-out	Beam	Notes
DL1726	7 W	560 lm	97 CRI	Ø40 x H85 mm	Ø35 mm	15° 24° 36° 50°	350 mA
DL1728	13 W	1180 lm	97 CRI	Ø80 x H83 mm	Ø75 mm	15° 24° 36° 50°	350 mA
DL1730	26 W	2600 lm	97 CRI	Ø100 x H121 mm	Ø95 mm	15° 24° 36° 50°	700 mA

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1730, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1730, 26 W, 15° beam

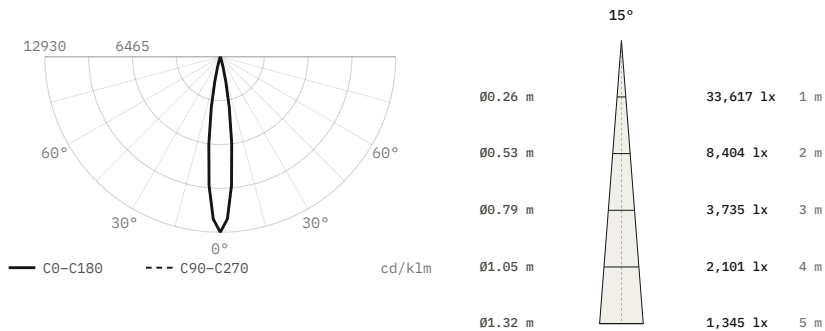


Luminous flux	2,600 lm
Efficacy	100 lm/W
Peak intensity	33,617 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø100 × 121 mm
Data	Calculated from catalogue data

DL1730, 26 W, 24° beam

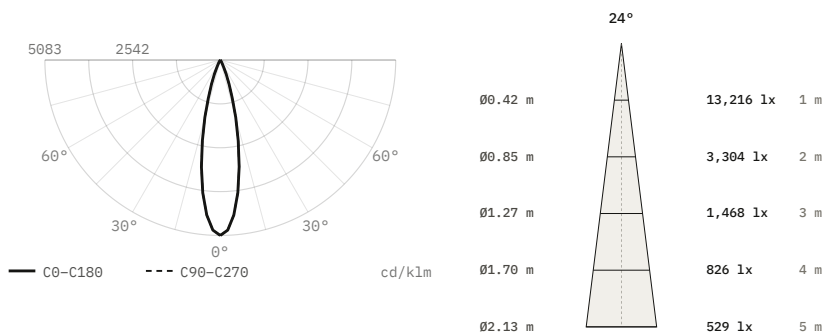


Luminous flux	2,600 lm
Efficacy	100 lm/W
Peak intensity	13,216 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø100 × 121 mm
Data	Calculated from catalogue data

DL1730, 26 W, 36° beam

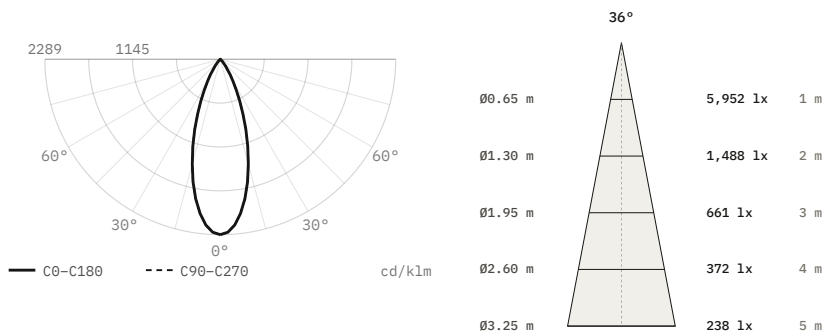

Luminous flux	2,600 lm
Efficacy	100 lm/W
Peak intensity	5,952 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø100 × 121 mm
Data	Calculated from catalogue data

DL1730, 26 W, 50° beam

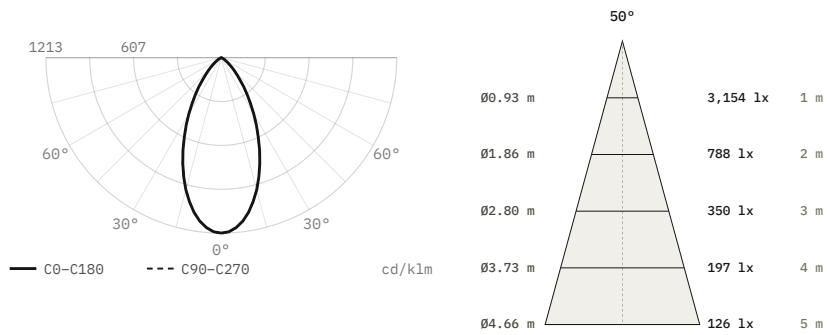

Luminous flux	2,600 lm
Efficacy	100 lm/W
Peak intensity	3,154 cd, 1,213 cd/klm
Beam angle (50%)	50°
Field angle (10%)	91.1°
Cut-off angle (2.5%)	57.5°
Flux 0–30° / 30–60° / 60–90°	64.8 / 33.6 / 1.5 %
Size	Ø100 × 121 mm
Data	Calculated from catalogue data