

Recessed

Maxi DL1732

Recessed spotlight



Recessed spotlight. 7, 10, 13, 18 or 26 W. Four beam angles, 15° to 50°. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø35 / Ø75 / Ø95 mm
- LED source: Citizen

Power 7–26 W	Luminous flux 560–2080 lm	Colour temperature 2700 K, 3000 K, 4000 K
CRI 97 CRI	Beam angles 15°, 24°, 36°, 50°	IP rating IP20
Certifications CE	Mounting Recessed	Finishes Black


Models

Code	Power	Flux	CRI	Size	Cut-out	Beam	Notes
DL1732	7 W	560 lm	97 CRI	Ø40 x H89 mm	Ø35 mm	15° 24° 36° 50°	350 mA
DL1734	10 W	800 lm	97 CRI	Ø80 x H96 mm	Ø75 mm	15° 24° 36° 50°	350 / 500 mA
DL1734	13 W	1140 lm	97 CRI	Ø80 x H96 mm	Ø75 mm	15° 24° 36° 50°	350 / 500 mA
DL1735	18 W	1400 lm	97 CRI	Ø100 x H136 mm	Ø95 mm	15° 24° 36° 50°	500 / 700 mA
DL1735	26 W	2080 lm	97 CRI	Ø100 x H136 mm	Ø95 mm	15° 24° 36° 50°	500 / 700 mA

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1735, from the same data as the IES and LDT files on the product page. Curves marked measured come from goniophotometer tests in the laboratory; the others are calculated from catalogue data, not measured.

DL1735, 26 W, 3000 K, 35.6° beam, measured

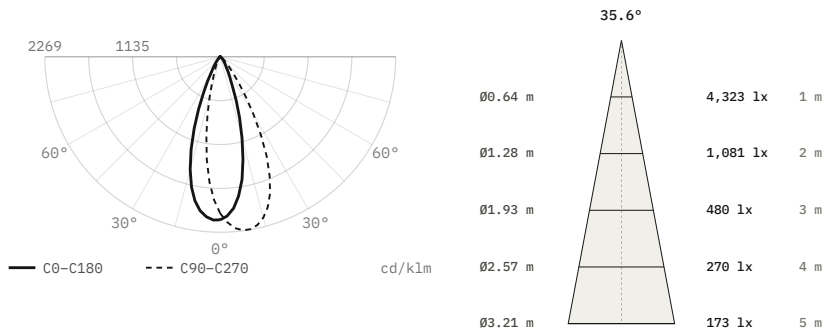


Luminous flux	2,049 lm
Efficacy	79 lm/W
Peak intensity	4,649 cd, 2,269 cd/klm
Beam angle (50%)	35.6°
Field angle (10%)	58.9°
Cut-off angle (2.5%)	50°
Flux 0–30° / 30–60° / 60–90°	82.4 / 16.6 / 0.9 %
Size	Ø100 × 136 mm
Data	Measured with a goniophotometer (EVERFINE GO-2000B), 19 August 2025

DL1735, 26 W, 15° beam

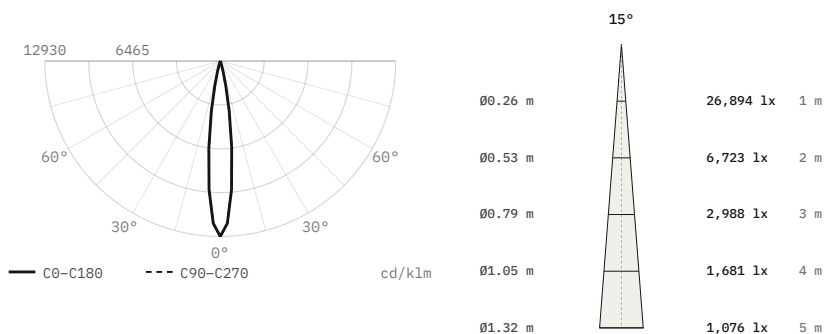


Luminous flux	2,080 lm
Efficacy	80 lm/W
Peak intensity	26,894 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø100 × 136 mm
Data	Calculated from catalogue data

DL1735, 26 W, 24° beam

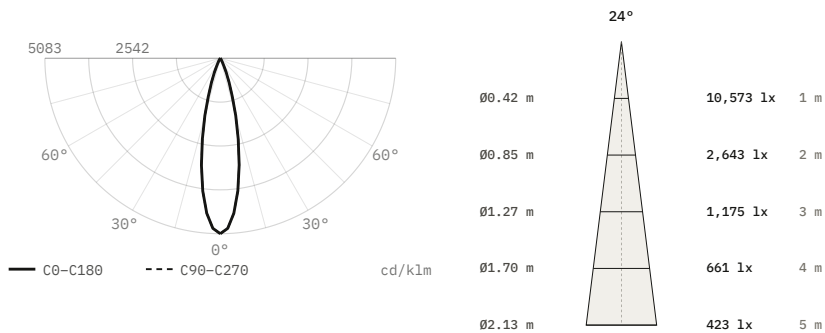


Luminous flux	2,080 lm
Efficacy	80 lm/W
Peak intensity	10,573 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø100 × 136 mm
Data	Calculated from catalogue data

DL1735, 26 W, 36° beam

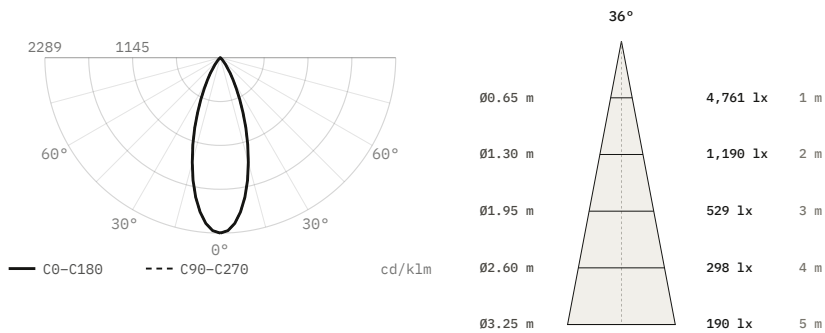

Luminous flux	2,080 lm
Efficacy	80 lm/W
Peak intensity	4,761 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø100 × 136 mm
Data	Calculated from catalogue data

DL1735, 26 W, 50° beam

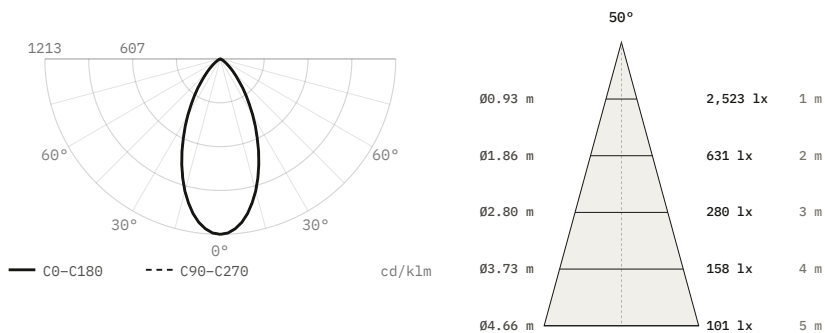

Luminous flux	2,080 lm
Efficacy	80 lm/W
Peak intensity	2,523 cd, 1,213 cd/klm
Beam angle (50%)	50°
Field angle (10%)	91.1°
Cut-off angle (2.5%)	57.5°
Flux 0–30° / 30–60° / 60–90°	64.8 / 33.6 / 1.5 %
Size	Ø100 × 136 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.