


Linear

Mini Neon

Linear luminaire

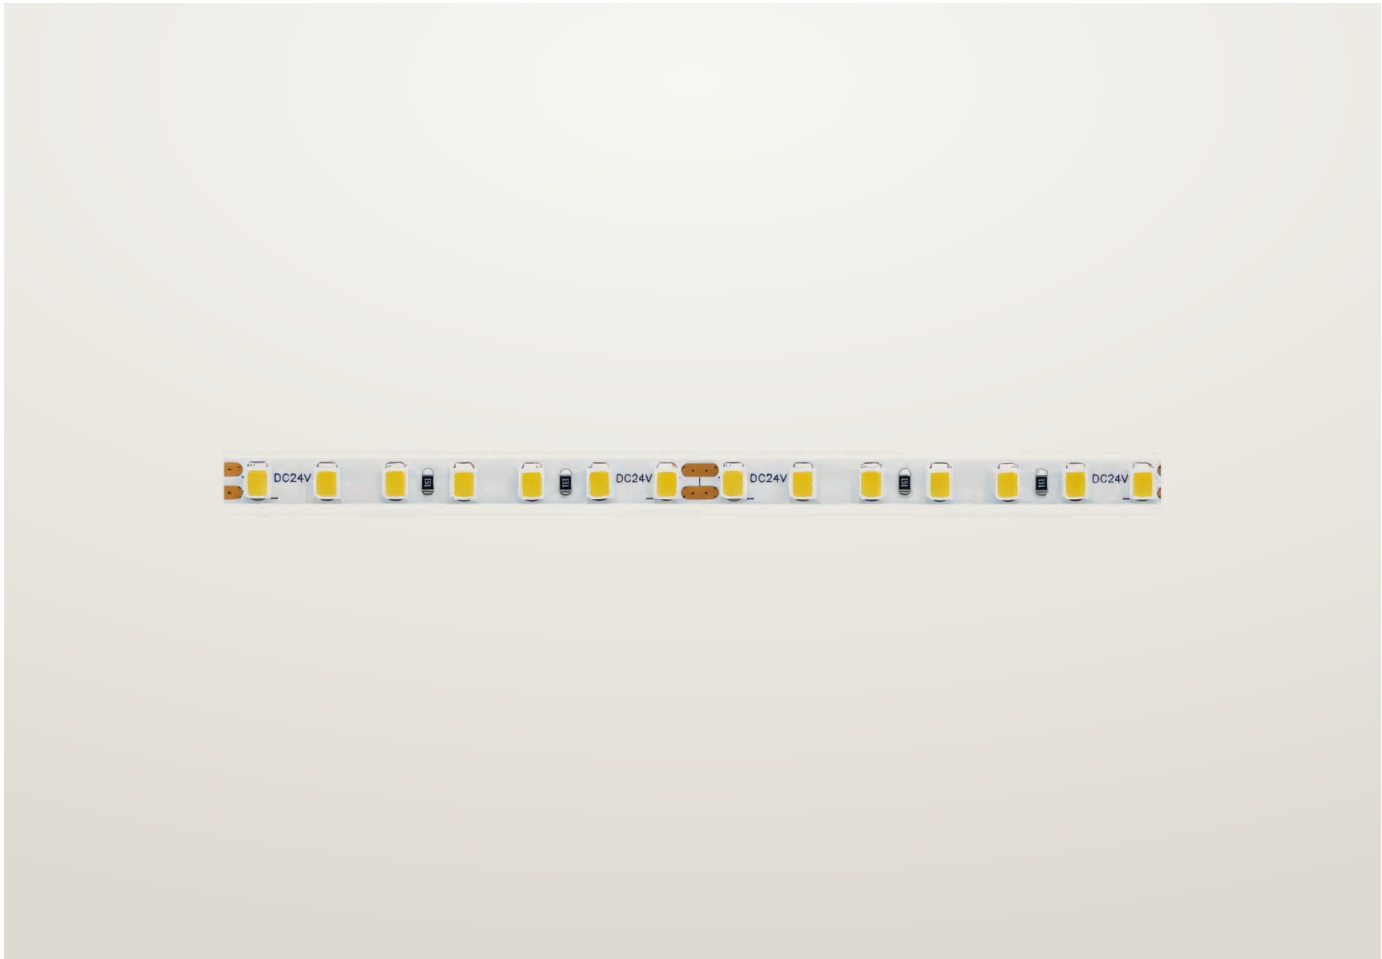


Linear luminaire. 9.6 W. 115.1° beam. 2700, 3000, 4000, 6500 K. 97 CRI.

— LED source: Citizen

Power 9.6 W	Voltage 24 V	Luminous flux 730 lm/m, 750 lm/m, 800 lm/m
Colour temperature 2700 K, 3000 K, 4000 K, 6500 K	CRI 97 CRI	Beam angles 115.1°
IP rating IP20	Certifications CE, RoHS, UL, ErP	Mounting Recessed, Surface
Finishes Black		

Dimensions

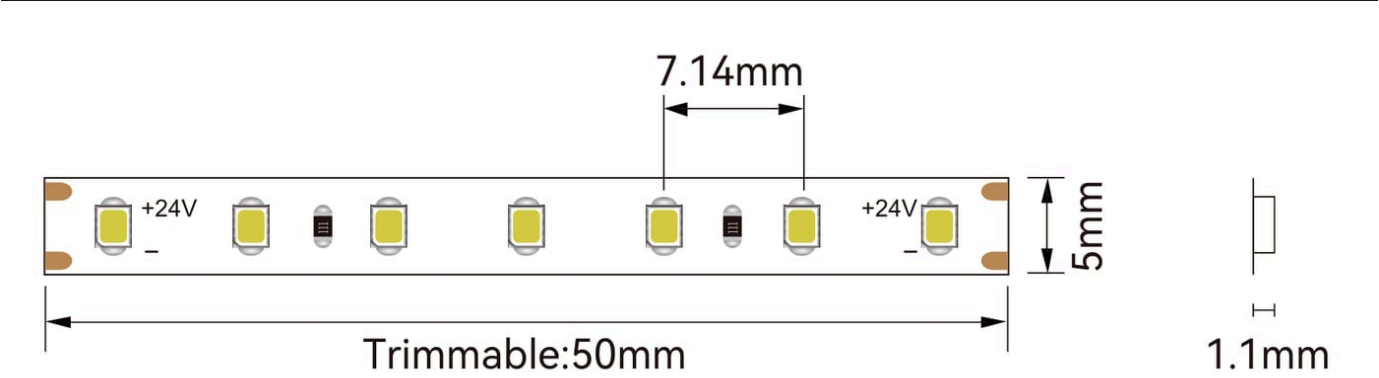


Models

Code	Version	Power	Voltage	Flux	CRI	Size	Beam	Notes
OL-KNNF24140T09-5A29	9.6 W, 140 LED/m, IP20	9.6 W	24 V	730 lm/m	97 CRI	W5 x T1.1 mm (PCB width 5 mm, thickness 1.1 mm)	115.1°	Power per metre
OL-INNF24140T09-5A29	9.6 W, 140 LED/m, IP20	9.6 W	24 V	750 lm/m	97 CRI	W5 x T1.1 mm (PCB width 5 mm, thickness 1.1 mm)	115.1°	Power per metre
OL-DNNF24140T09-5A29	9.6 W, 140 LED/m, IP20	9.6 W	24 V	800 lm/m	97 CRI	W5 x T1.1 mm (PCB width 5 mm, thickness 1.1 mm)	115.1°	Power per metre
OL-WNNF24140T09-5A29	9.6 W, 140 LED/m, IP20	9.6 W	24 V	800 lm/m	97 CRI	W5 x T1.1 mm (PCB width 5 mm, thickness 1.1 mm)	115.1°	Power per metre

Photometric data

Illuminance on the beam axis (lx) and beam diameter at each mounting distance, per model and beam angle. IES files for every model and beam can be downloaded from the product page.


9.6 W

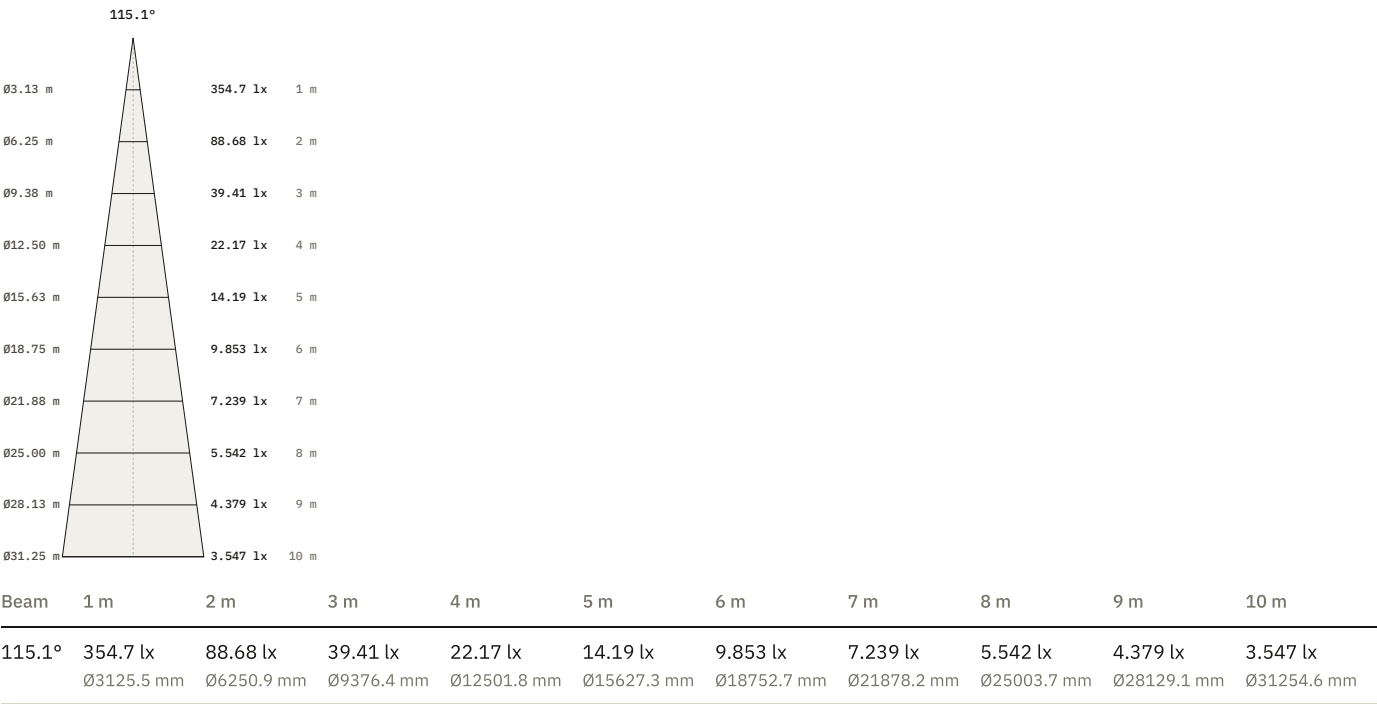

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for OL-KNNF24140T09-5A29, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

OL-KNNF24140T09-5A29, 9.6 W, 115.1° beam

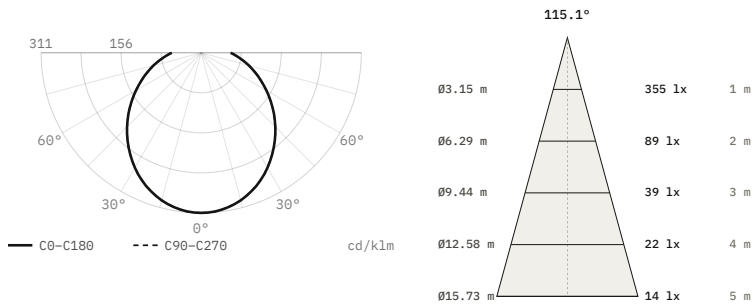

Luminous flux	1,139 lm
Efficacy	119 lm/W
Peak intensity	355 cd, 311 cd/klm
Beam angle (50%)	115.1°
Cut-off angle (2.5%)	90°
Flux 0–30° / 30–60° / 60–90°	23.9 / 45.6 / 30.4 %
Size	5 × 0 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.