

Linear

Mini

Linear luminaire




Linear luminaire. 7, 12 or 20 W. 24° or 30° beam. 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø74 / Ø116 / Ø226 mm
- LED source: Citizen
- UGR <14 (24°), <18 (30°)

Power 7 W, 12 W, 20 W	Voltage 9 V, 15 V, 30 V	Colour temperature 3000 K, 4000 K
CRI 97 CRI	Beam angles 24°, 30°	IP rating IP20
Mounting Recessed	Control On/Off, Triac	Finishes Black



Dimensions

7W

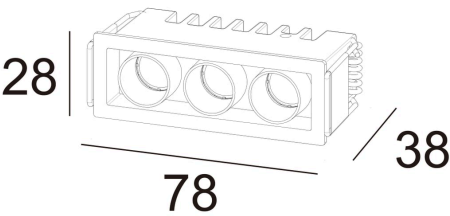



74*24

12W

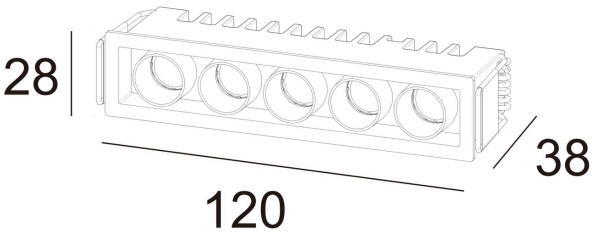

116*24

20W

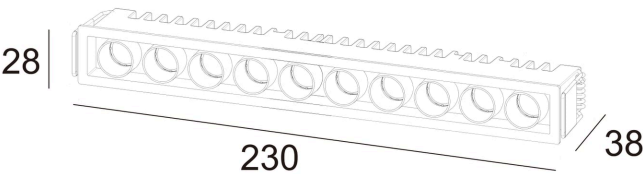

226*24


Models

Code	Power	Voltage	CRI	Size	Cut-out	Beam	Notes
RE-MINI-3	7 W	9 V	97 CRI	L78 x W28 x D38 mm	Ø74 mm	24° 30°	700 mA
RE-MINI-5	12 W	15 V	97 CRI	L120 x W28 x D38 mm	Ø116 mm	24° 30°	700 mA
RE-MINI-10	20 W	30 V	97 CRI	L230 x W28 x D38 mm	Ø226 mm	24° 30°	600 / 700 mA


Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for RE-MINI-10, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

RE-MINI-10, 20 W, 24° beam

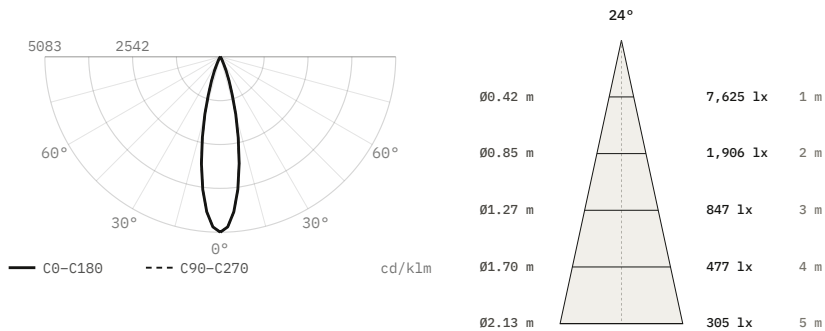

RE-MINI-10, 20 W, 30° beam

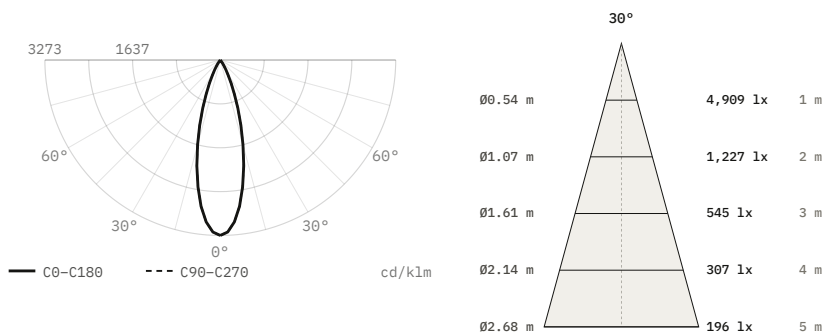

DiaNoche
Via Tortona, 31, 20144 Milano MI, Italy
service@dianoche.it
dianoche.it

Technical data may change without notice.