

Linear

Mini2

Linear luminaire





Linear luminaire. 5, 10 or 15 W. Four beam angles, 20° to 80°. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø70 / Ø130 / Ø190 mm
- LED source: Citizen



Power 5 W, 10 W, 15 W	Voltage 9 V, 18 V, 27 V	Colour temperature 2700 K, 3000 K, 4000 K
CRI 97 CRI	Beam angles 20°, 40°, 60°, 80°	IP rating IP20
Mounting Recessed	Control On/Off	Finishes White, Black

Dimensions



5W

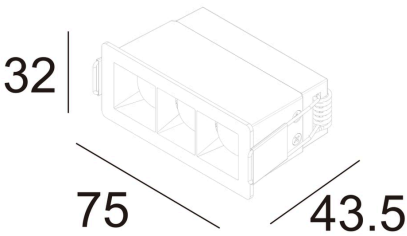

10W

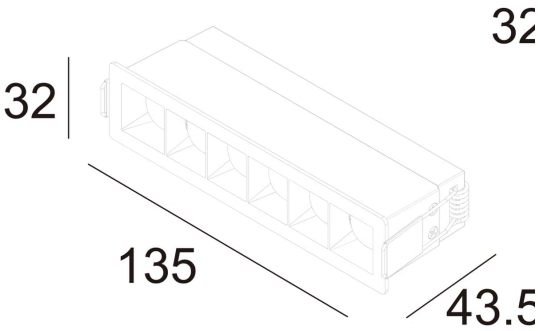

15W

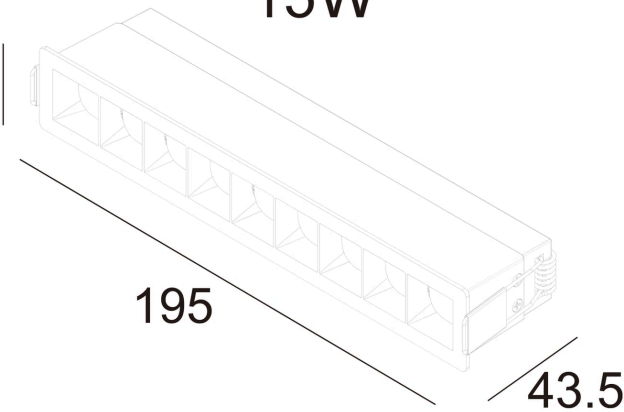

Models

Code	Power	Voltage	CRI	Size	Cut-out	Beam	Notes
RE-MINI2-3	5 W	9 V	97 CRI	L75 x W32 x D43.5 mm	Ø70 mm	20° 40° 60° 80°	500 mA
RE-MINI2-6	10 W	18 V	97 CRI	L135 x W32 x D43.5 mm	Ø130 mm	20° 40° 60° 80°	500 mA
RE-MINI2-9	15 W	27 V	97 CRI	L195 x W32 x D43.5 mm	Ø190 mm	20° 40° 60° 80°	500 mA

Finishes



Black




White

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for RE-MINI2-9, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

RE-MINI2-9, 15 W, 20° beam

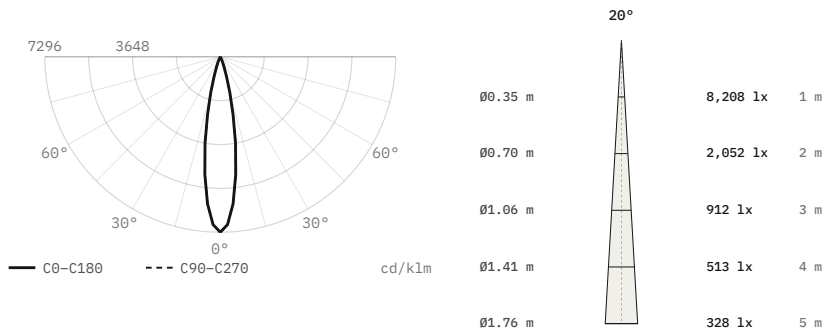


Luminous flux	1,125 lm
Efficacy	75 lm/W
Peak intensity	8,208 cd, 7,296 cd/klm
Beam angle (50%)	20°
Field angle (10%)	36.5°
Cut-off angle (2.5%)	23°
Flux 0–30° / 30–60° / 60–90°	99.8 / 0.2 / 0 %
Size	195 × 32 mm
Data	Estimated from catalogue data

RE-MINI2-9, 15 W, 40° beam

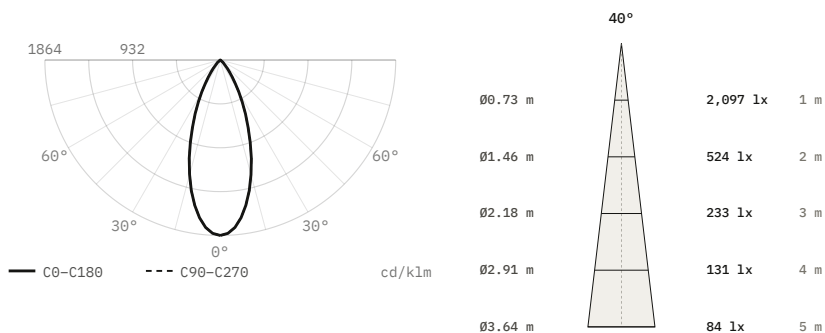


Luminous flux	1,125 lm
Efficacy	75 lm/W
Peak intensity	2,097 cd, 1,864 cd/klm
Beam angle (50%)	40°
Field angle (10%)	72.9°
Cut-off angle (2.5%)	46°
Flux 0–30° / 30–60° / 60–90°	79.9 / 19.9 / 0.2 %
Size	195 × 32 mm
Data	Estimated from catalogue data

RE-MINI2-9, 15 W, 60° beam

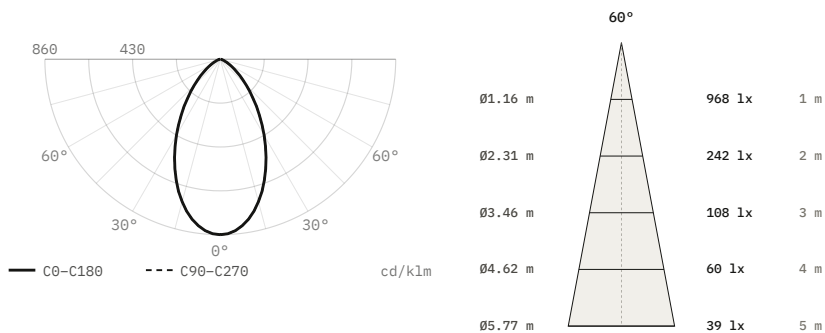

Luminous flux	1,125 lm
Efficacy	75 lm/W
Peak intensity	968 cd, 860 cd/klm
Beam angle (50%)	60°
Field angle (10%)	109.4°
Cut-off angle (2.5%)	69°
Flux 0–30° / 30–60° / 60–90°	52.4 / 42.6 / 5 %
Size	195 × 32 mm
Data	Estimated from catalogue data

RE-MINI2-9, 15 W, 80° beam

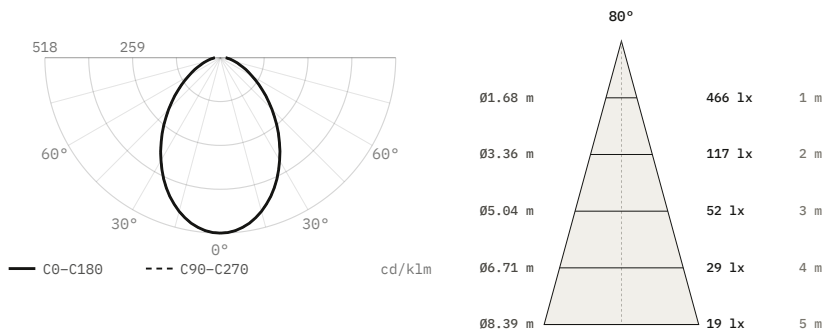

Luminous flux	900 lm
Efficacy	60 lm/W
Peak intensity	466 cd, 518 cd/klm
Beam angle (50%)	80°
Field angle (10%)	145.8°
Cut-off angle (2.5%)	90°
Flux 0–30° / 30–60° / 60–90°	36.2 / 48.2 / 15.7 %
Size	195 × 32 mm
Data	Estimated from catalogue data

DiaNoche
Via Tortona, 31, 20144 Milano MI, Italy
service@dianoche.it
dianoche.it

Technical data may change without notice.