

Floor

Mobile ML0007

Floor lamp




Floor lamp. 13 W. Four beam angles, 15° to 60°. 2700, 3000, 4000 K. 97 CRI.

— LED source: Citizen

Power 13 W	Voltage 230 V AC	Luminous flux 1040 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 15°, 24°, 36°, 60°
IP rating IP20	Certifications CE	Mounting Floor
Finishes White		

Dimensions

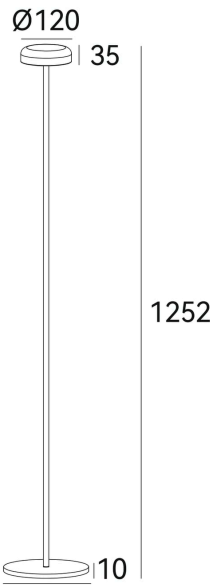


Models

Code	Power	Voltage	Flux	CRI	Size	Beam
ML0007	13 W	230 V AC	1040 lm	97 CRI	Ø200 x H1252 mm	15° 24° 36° 60°

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for ML0007, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

ML0007, 13 W, 15° beam

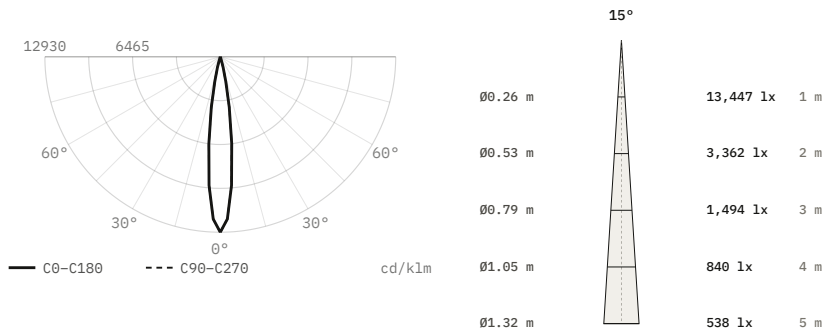


Luminous flux	1,040 lm
Efficacy	80 lm/W
Peak intensity	13,447 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø200 × 1252 mm
Data	Calculated from catalogue data

ML0007, 13 W, 24° beam

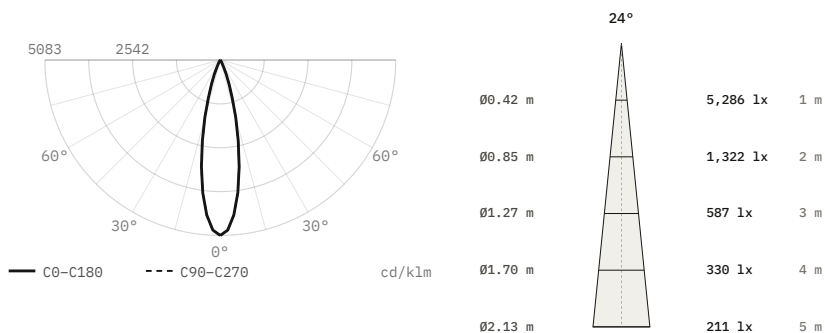


Luminous flux	1,040 lm
Efficacy	80 lm/W
Peak intensity	5,286 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø200 × 1252 mm
Data	Calculated from catalogue data

ML0007, 13 W, 36° beam

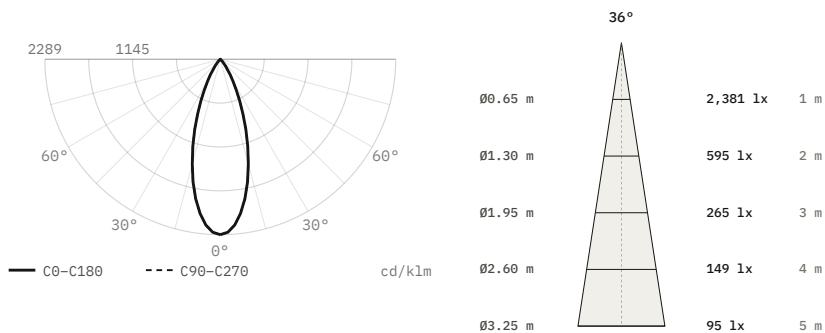

Luminous flux	1,040 lm
Efficacy	80 lm/W
Peak intensity	2,381 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø200 × 1252 mm
Data	Calculated from catalogue data

ML0007, 13 W, 60° beam

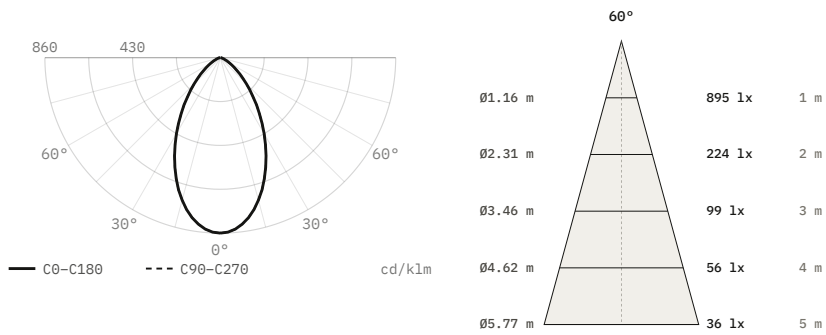

Luminous flux	1,040 lm
Efficacy	80 lm/W
Peak intensity	895 cd, 860 cd/klm
Beam angle (50%)	60°
Field angle (10%)	109.4°
Cut-off angle (2.5%)	69°
Flux 0–30° / 30–60° / 60–90°	52.4 / 42.6 / 5 %
Size	Ø200 × 1252 mm
Data	Calculated from catalogue data