

Floor

Mobile ML0014

Floor lamp




Floor lamp. 15 W. Four beam angles, 15° to 50°. 2700, 3000, 4000 K. 97 CRI.

— LED source: Citizen

Power 15 W	Voltage 230 V AC	Luminous flux 1350 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 15°, 24°, 36°, 50°
IP rating IP20	Certifications CE	Mounting Floor
Finishes Black		

Dimensions

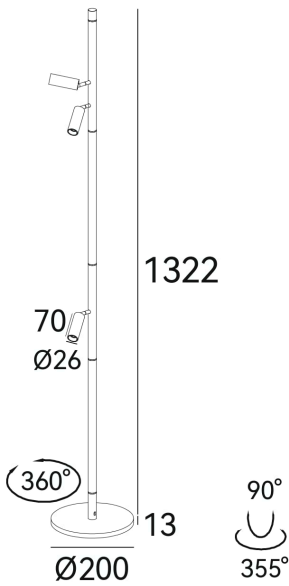


Models

Code	Power	Voltage	Flux	CRI	Size	Beam
ML0014	15 W	230 V AC	1350 lm	97 CRI	Ø200 x H1322 mm	15° 24° 36° 50°

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for ML0014, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

ML0014, 15 W, 15° beam

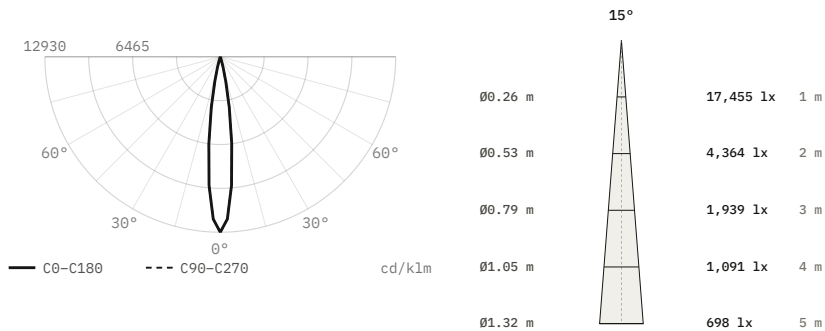


Luminous flux	1,350 lm
Efficacy	90 lm/W
Peak intensity	17,455 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø200 × 1322 mm
Data	Calculated from catalogue data

ML0014, 15 W, 24° beam

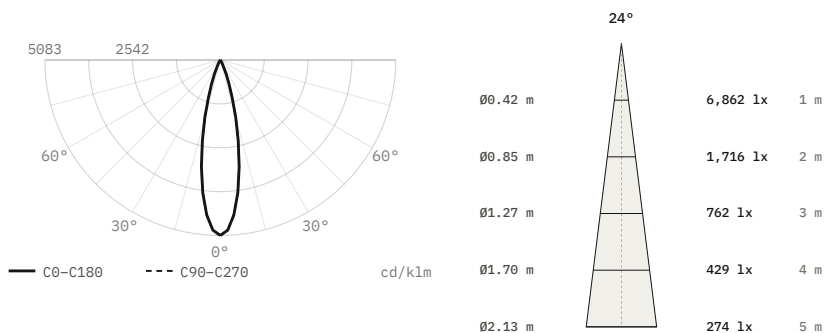


Luminous flux	1,350 lm
Efficacy	90 lm/W
Peak intensity	6,862 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø200 × 1322 mm
Data	Calculated from catalogue data

ML0014, 15 W, 36° beam

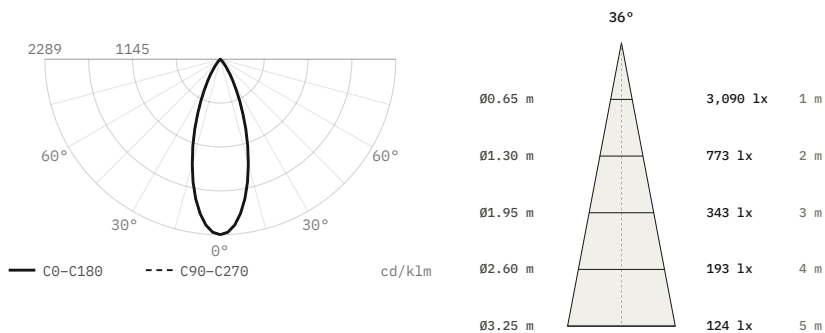

Luminous flux	1,350 lm
Efficacy	90 lm/W
Peak intensity	3,090 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø200 × 1322 mm
Data	Calculated from catalogue data

ML0014, 15 W, 50° beam

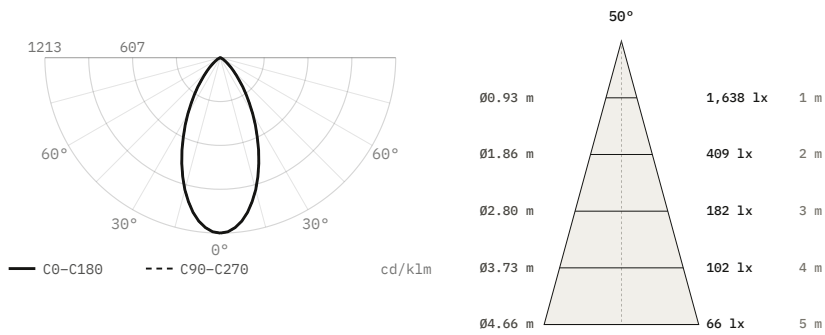

Luminous flux	1,350 lm
Efficacy	90 lm/W
Peak intensity	1,638 cd, 1,213 cd/klm
Beam angle (50%)	50°
Field angle (10%)	91.1°
Cut-off angle (2.5%)	57.5°
Flux 0–30° / 30–60° / 60–90°	64.8 / 33.6 / 1.5 %
Size	Ø200 × 1322 mm
Data	Calculated from catalogue data

DiaNoche
Via Tortona, 31, 20144 Milano MI, Italy
service@dianoche.it
dianoche.it

Technical data may change without notice.