

Floor

Mobile ML0015

Floor lamp




Floor lamp. 8 W. Four beam angles, 15° to 60°. 2700, 3000, 4000 K. 97 CRI.

— LED source: Citizen

Power 8 W	Voltage 230 V AC	Luminous flux 720 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 15°, 24°, 36°, 60°
IP rating IP20	Certifications CE	Mounting Floor
Finishes White		

Dimensions

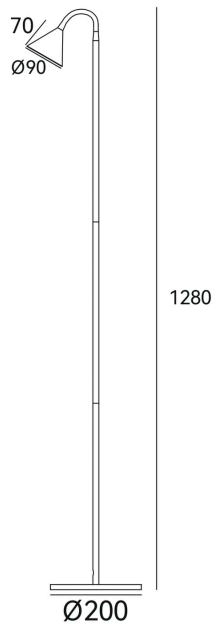


Models

Code	Power	Voltage	Flux	CRI	Size	Beam
ML0015	8 W	230 V AC	720 lm	97 CRI	Ø200 x H1280 mm	15° 24° 36° 60°

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for ML0015, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

ML0015, 8 W, 15° beam

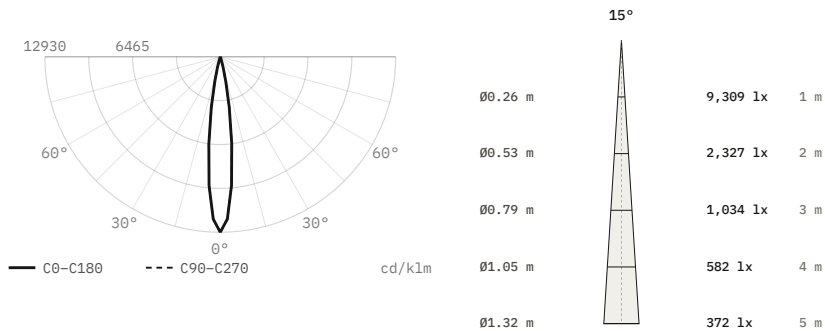


Luminous flux	720 lm
Efficacy	90 lm/W
Peak intensity	9,309 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø200 × 1280 mm
Data	Calculated from catalogue data

ML0015, 8 W, 24° beam

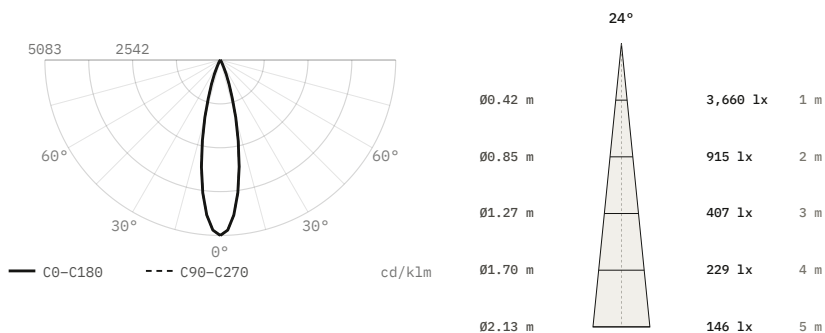


Luminous flux	720 lm
Efficacy	90 lm/W
Peak intensity	3,660 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø200 × 1280 mm
Data	Calculated from catalogue data

ML0015, 8 W, 36° beam

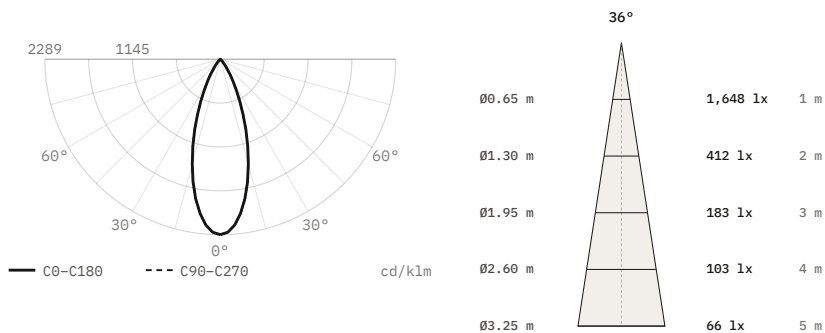

Luminous flux	720 lm
Efficacy	90 lm/W
Peak intensity	1,648 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø200 × 1280 mm
Data	Calculated from catalogue data

ML0015, 8 W, 60° beam

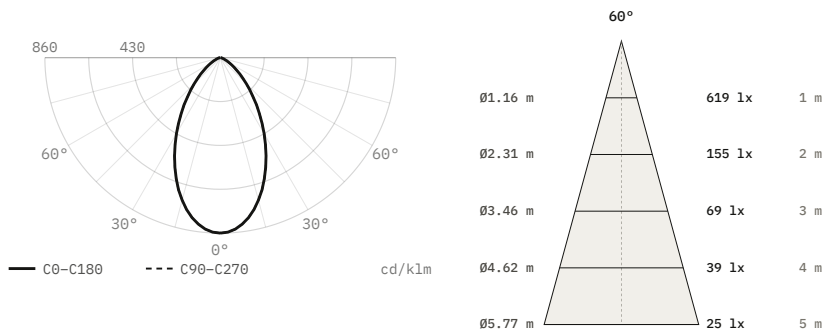

Luminous flux	720 lm
Efficacy	90 lm/W
Peak intensity	619 cd, 860 cd/klm
Beam angle (50%)	60°
Field angle (10%)	109.4°
Cut-off angle (2.5%)	69°
Flux 0–30° / 30–60° / 60–90°	52.4 / 42.6 / 5 %
Size	Ø200 × 1280 mm
Data	Calculated from catalogue data

DiaNoche
Via Tortona, 31, 20144 Milano MI, Italy
service@dianoche.it
dianoche.it

Technical data may change without notice.