Moon system

Moon Disc M-P01+D133

Moon surface luminaire

Surface luminaire from the Moon range. 8 W. 120° beam. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø38 mm
- LED source: Citizen

Power **8 W**	Voltage **48 V DC**	Colour temperature **2700 K, 3000 K, 4000 K**
CRI **97 CRI**	Beam angles **120°**	IP rating **IP20**
Mounting **Recessed, Surface**	Control **On/Off, Triac**	Finishes **Black**

Dimensions

M-P01+D133

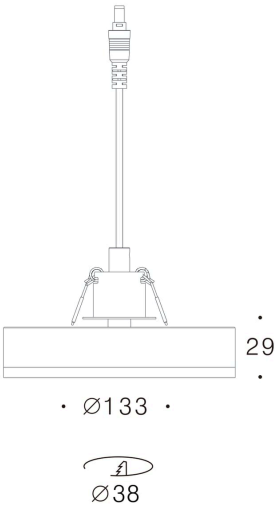

Models

Code	Version	Power	Voltage	CRI	Size	Cut-out	Beam	Notes
M-P01+D133	Ø133 mm	8 W	48 V DC	97 CRI	Ø133 × 29 mm	Ø38 mm	120°	LED 36 V, 200 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for M-P01+D133, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

M-P01+D133, 8 W, 120° beam

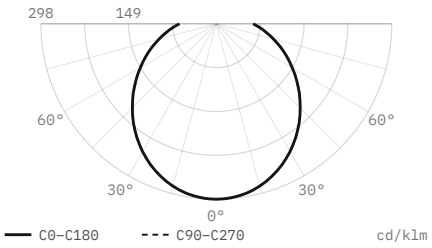

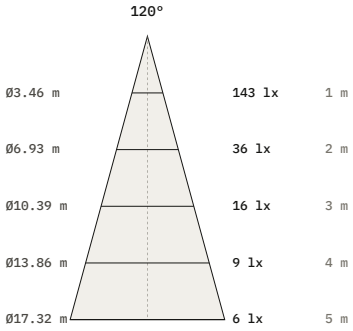

Luminous flux	480 lm
Efficacy	60 lm/W
Peak intensity	143 cd, 298 cd/klm
Beam angle (50%)	120°
Cut-off angle (2.5%)	90°
Flux 0–30° / 30–60° / 60–90°	23 / 45.1 / 31.8 %
Size	Ø133 × 29 mm
Data	Estimated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.