

Recessed

Moon DL1014

Recessed spotlight




Recessed spotlight. 10 W. Four beam angles, 15° to 55°. 2700, 3000, 4000 K. IP54. 97 CRI.

- Ceiling cut-out Ø83 mm
- LED source: Citizen

Power 10 W	Voltage max 19 V	Luminous flux 960 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 15°, 24°, 36°, 55°
IP rating IP54	Certifications CE	Mounting Recessed
Finishes White		

Dimensions

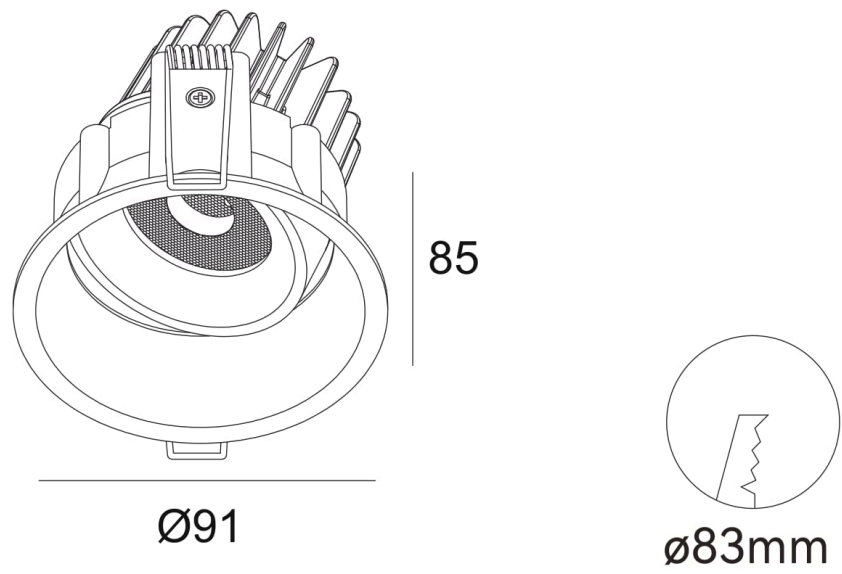


Models

Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1014	10 W	max 19 V	960 lm	97 CRI	Ø91 × 85 mm	Ø83 mm	15° 24° 36° 55°	500 mA

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1014, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1014, 10 W, 15° beam

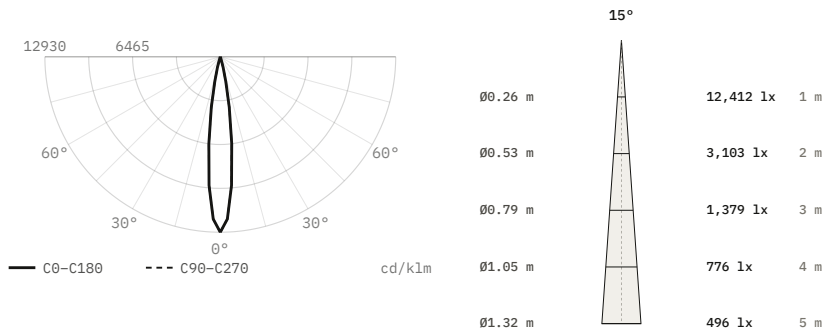


Luminous flux	960 lm
Efficacy	96 lm/W
Peak intensity	12,412 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø91 × 85 mm
Data	Calculated from catalogue data

DL1014, 10 W, 24° beam

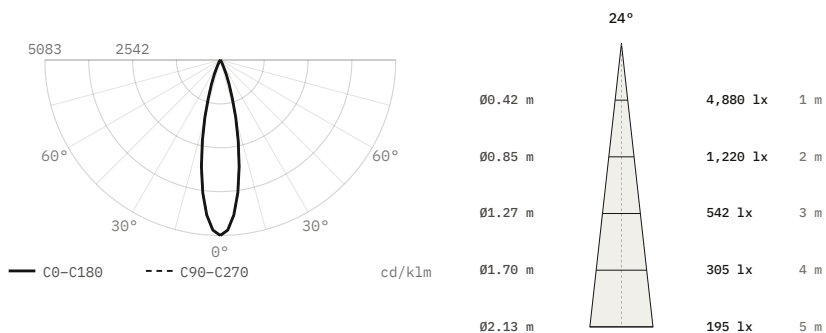


Luminous flux	960 lm
Efficacy	96 lm/W
Peak intensity	4,880 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø91 × 85 mm
Data	Calculated from catalogue data

DL1014, 10 W, 36° beam

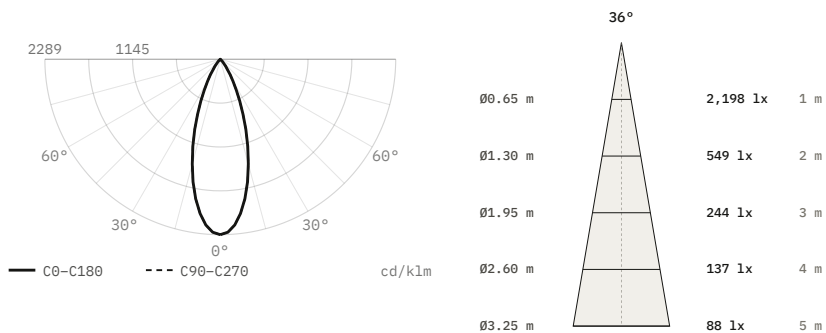

Luminous flux	960 lm
Efficacy	96 lm/W
Peak intensity	2,198 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø91 × 85 mm
Data	Calculated from catalogue data

DL1014, 10 W, 55° beam

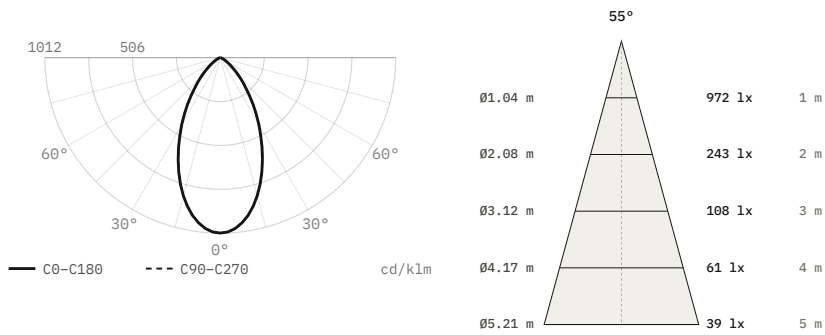

Luminous flux	960 lm
Efficacy	96 lm/W
Peak intensity	972 cd, 1,012 cd/klm
Beam angle (50%)	55°
Field angle (10%)	100.2°
Cut-off angle (2.5%)	63°
Flux 0–30° / 30–60° / 60–90°	58.2 / 38.8 / 3 %
Size	Ø91 × 85 mm
Data	Calculated from catalogue data