


Recessed

Moon DL1551

Recessed spotlight

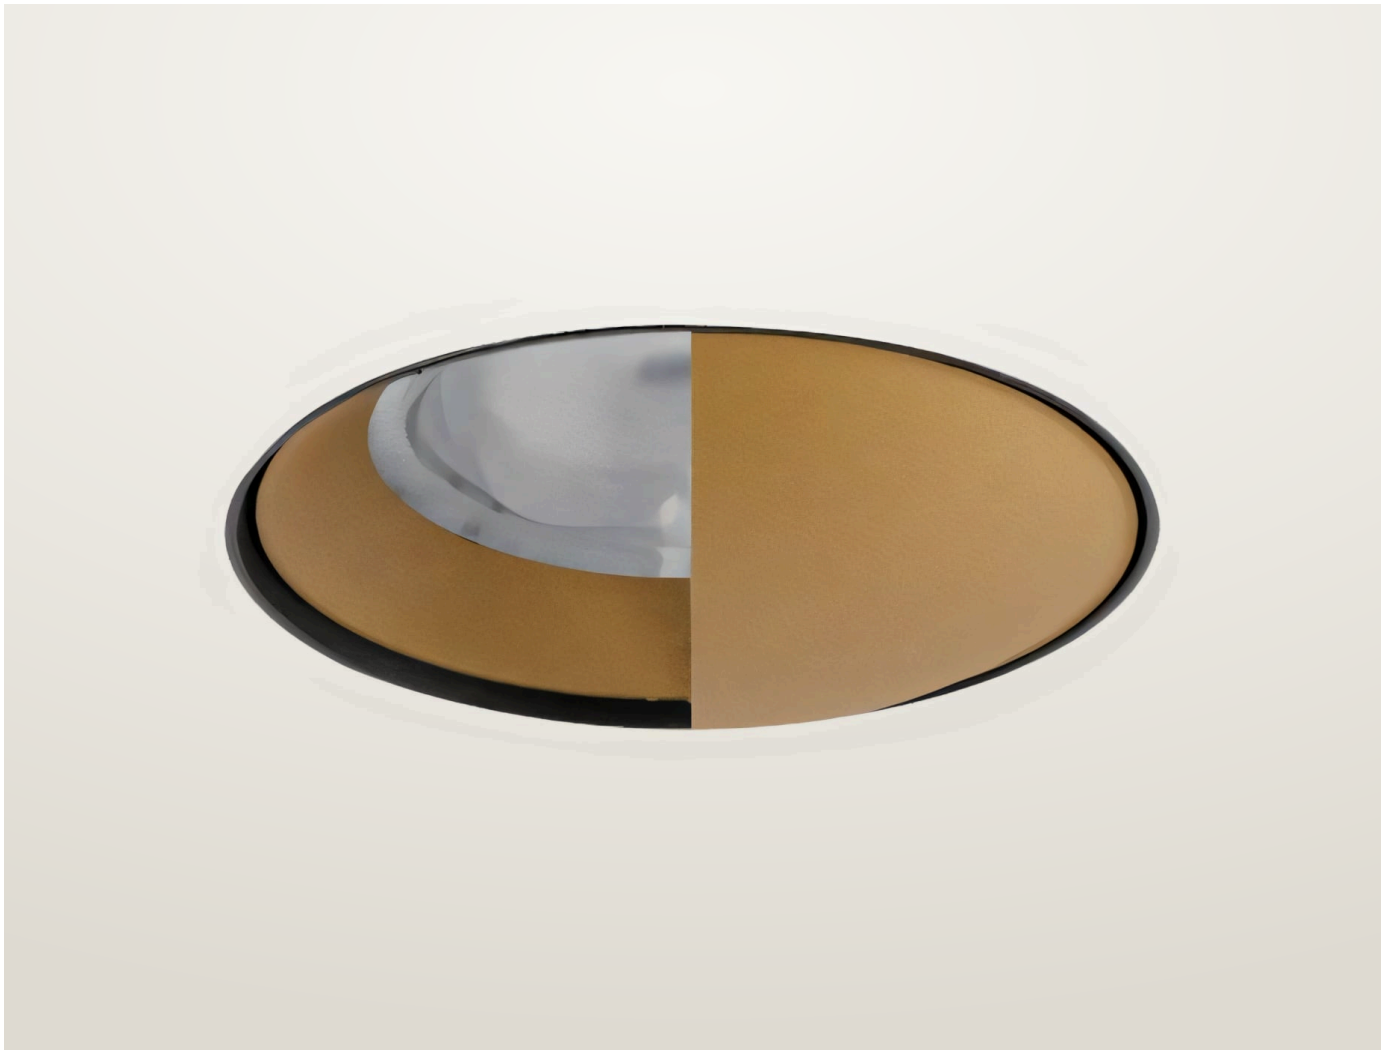


Recessed spotlight. 13 W. 50° beam. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø76 mm
- LED source: Citizen

Power 13 W	Voltage max 37 V	Luminous flux 1020 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 50°
IP rating IP20	Certifications CE	Mounting Recessed
Finishes Gold		

Dimensions

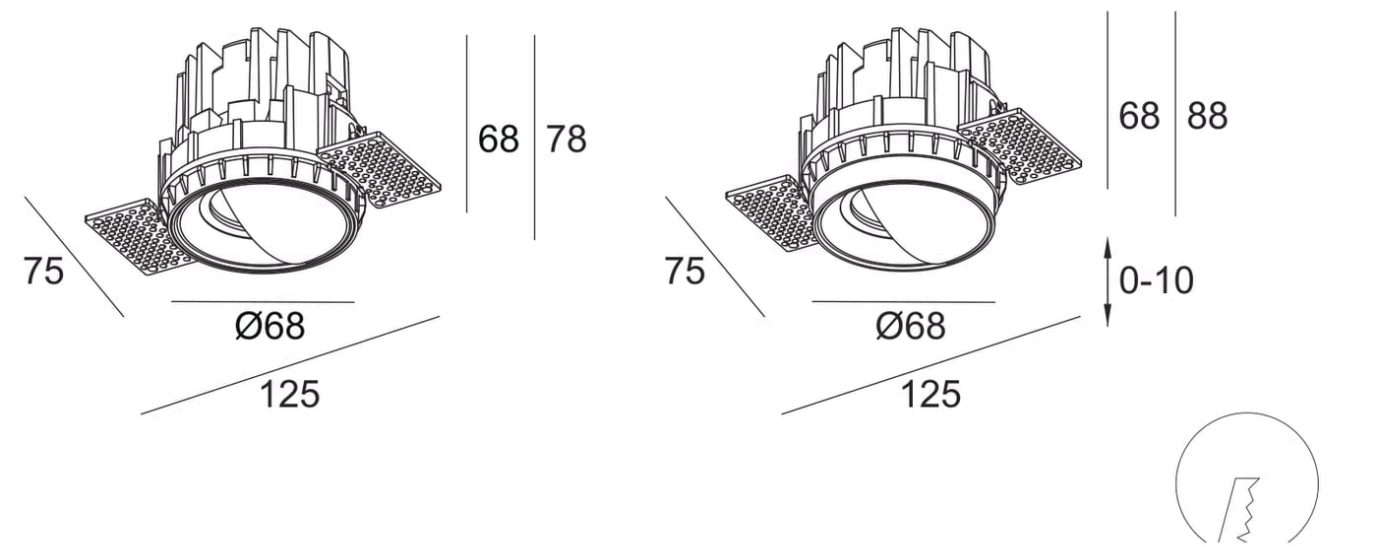

Models

Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1551	13 W	max 37 V	1020 lm	97 CRI	Ø68 mm; trimless flange 125 × 75 mm; heights 68 and 78 mm	Ø76 mm	50°	350 mA

Finishes



Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1551, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1551, 13 W, 50° beam

