

Recessed

Moon DL1754

Recessed spotlight




Recessed spotlight. 18 W. Four beam angles, 15° to 50°. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø90 mm
- LED source: Citizen

Power 18 W	Voltage max 37 V	Luminous flux 1800 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 15°, 24°, 36°, 50°
IP rating IP20	Certifications CE	Mounting Recessed
Finishes White		

Dimensions

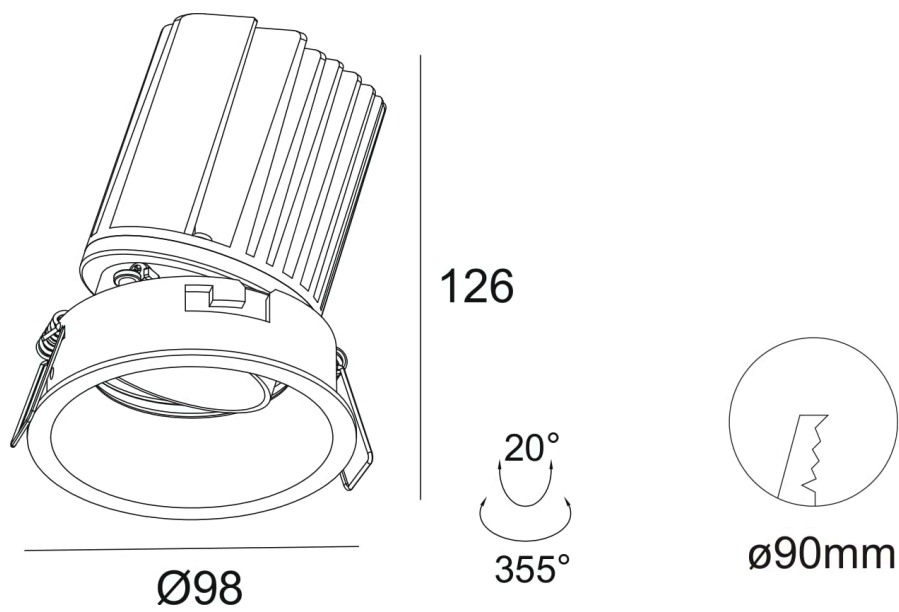


Models

Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1754	18 W	max 37 V	1800 lm	97 CRI	Ø98 × 126 mm	Ø90 mm	15° 24° 36° 50°	500 mA

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1754, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1754, 18 W, 15° beam

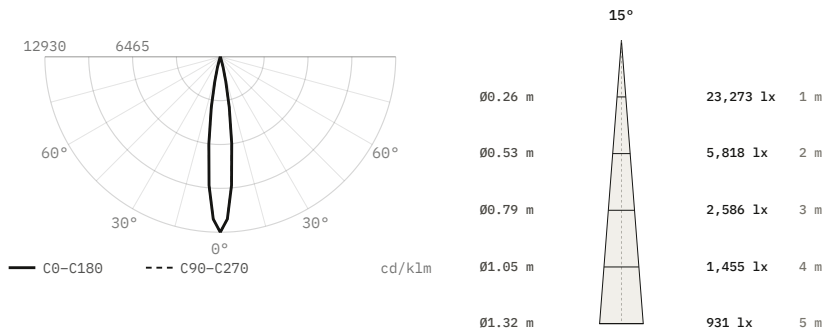


Luminous flux	1,800 lm
Efficacy	100 lm/W
Peak intensity	23,273 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø98 × 126 mm
Data	Calculated from catalogue data

DL1754, 18 W, 24° beam

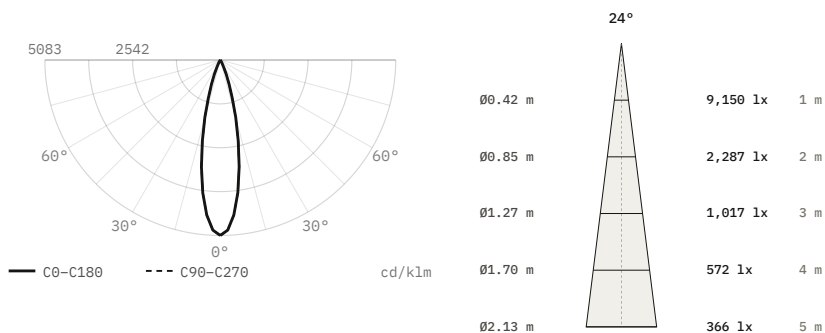


Luminous flux	1,800 lm
Efficacy	100 lm/W
Peak intensity	9,150 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø98 × 126 mm
Data	Calculated from catalogue data

DL1754, 18 W, 36° beam

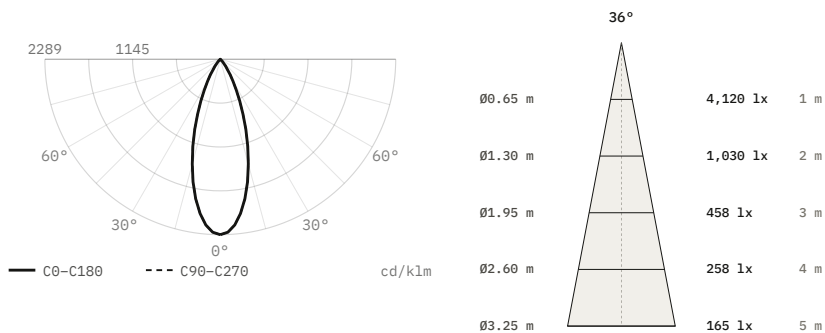

Luminous flux	1,800 lm
Efficacy	100 lm/W
Peak intensity	4,120 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø98 × 126 mm
Data	Calculated from catalogue data

DL1754, 18 W, 50° beam

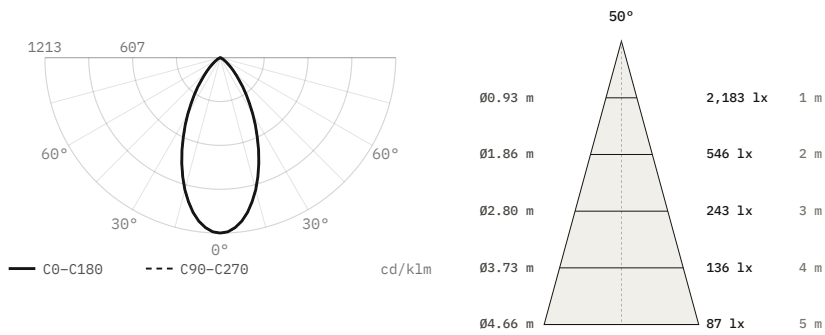

Luminous flux	1,800 lm
Efficacy	100 lm/W
Peak intensity	2,183 cd, 1,213 cd/klm
Beam angle (50%)	50°
Field angle (10%)	91.1°
Cut-off angle (2.5%)	57.5°
Flux 0-30° / 30-60° / 60-90°	64.8 / 33.6 / 1.5 %
Size	Ø98 × 126 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.