

Recessed

Moon DL1816

Recessed spotlight




Recessed spotlight.

- Ceiling cut-out Ø55 mm
- LED source: Citizen

Voltage max 18 V, max 36 V	Luminous flux 800/1020 lm	Colour temperature 2700 K, 3000 K, 4000 K
CRI 97 CRI	IP rating IP20	Certifications CE
Mounting Recessed	Finishes White	


Dimensions

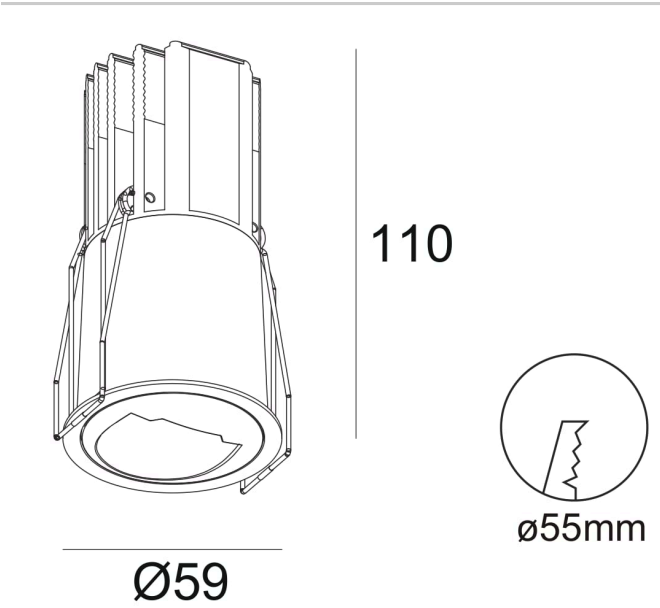

Models

Code	Voltage	Flux	CRI	Size	Cut-out	Notes
DL1816	max 18 V, max 36 V	800/1020 lm	97 CRI	Ø59 × 110 mm	Ø55 mm	350 / 500 mA

Finishes

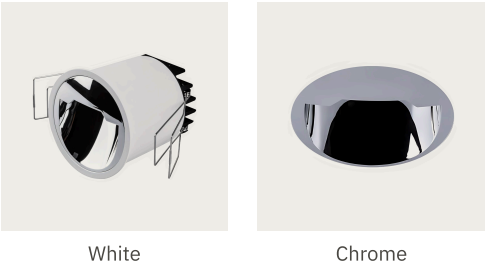

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1816, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1816, wide distribution

