

Moon system

# Moon Series C M-C180D

Moon spotlight




Spotlight for the Moon magnetic track. 6 W. 120° beam. — LED source: Citizen  
3000 K. 97 CRI.

|                                       |                          |                              |
|---------------------------------------|--------------------------|------------------------------|
| Power<br>6 W                          | Voltage<br>48 V DC       | Colour temperature<br>3000 K |
| CRI<br>97 CRI                         | Beam angles<br>120°      | IP rating<br>IP20            |
| Mounting<br>Suspended, Magnetic track | Control<br>On/Off, Triac | Finishes<br>Black            |

Dimensions

M-C180D

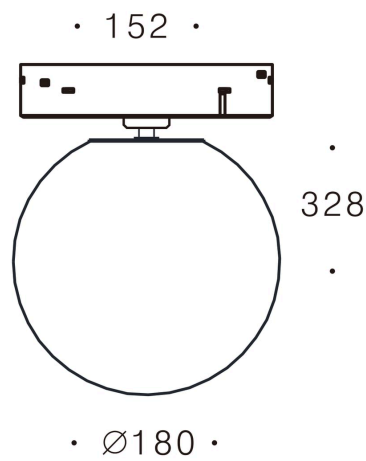


Models

| Code    | Version | Power | Voltage | CRI    | Size                          | Beam | Notes            |
|---------|---------|-------|---------|--------|-------------------------------|------|------------------|
| M-C180D |         |       |         | 97 CRI |                               | 120° |                  |
| M-C180D | Ø180 mm | 6 W   | 48 V DC | 97 CRI | Ø180 × 328 mm; adapter 152 mm | 120° | LED 36 V, 150 mA |

# Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for M-C180D, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

## M-C180D, 6 W, 120° beam

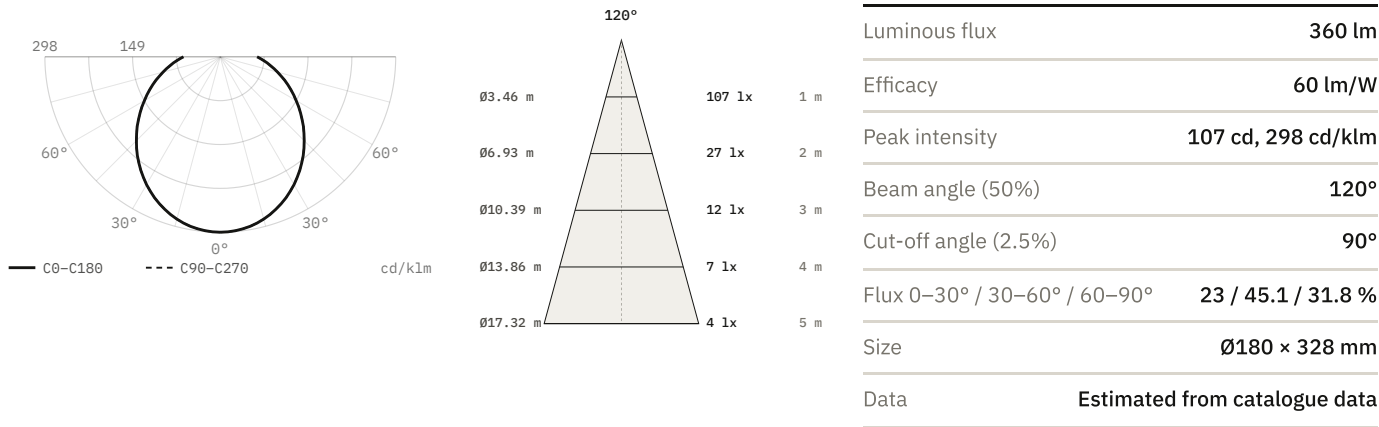

DiaNoche  
service@dianoche.it  
dianoche.it

Technical data may change without notice.