


Linear

OL-KNNF24128T09-0A39


Linear luminaire

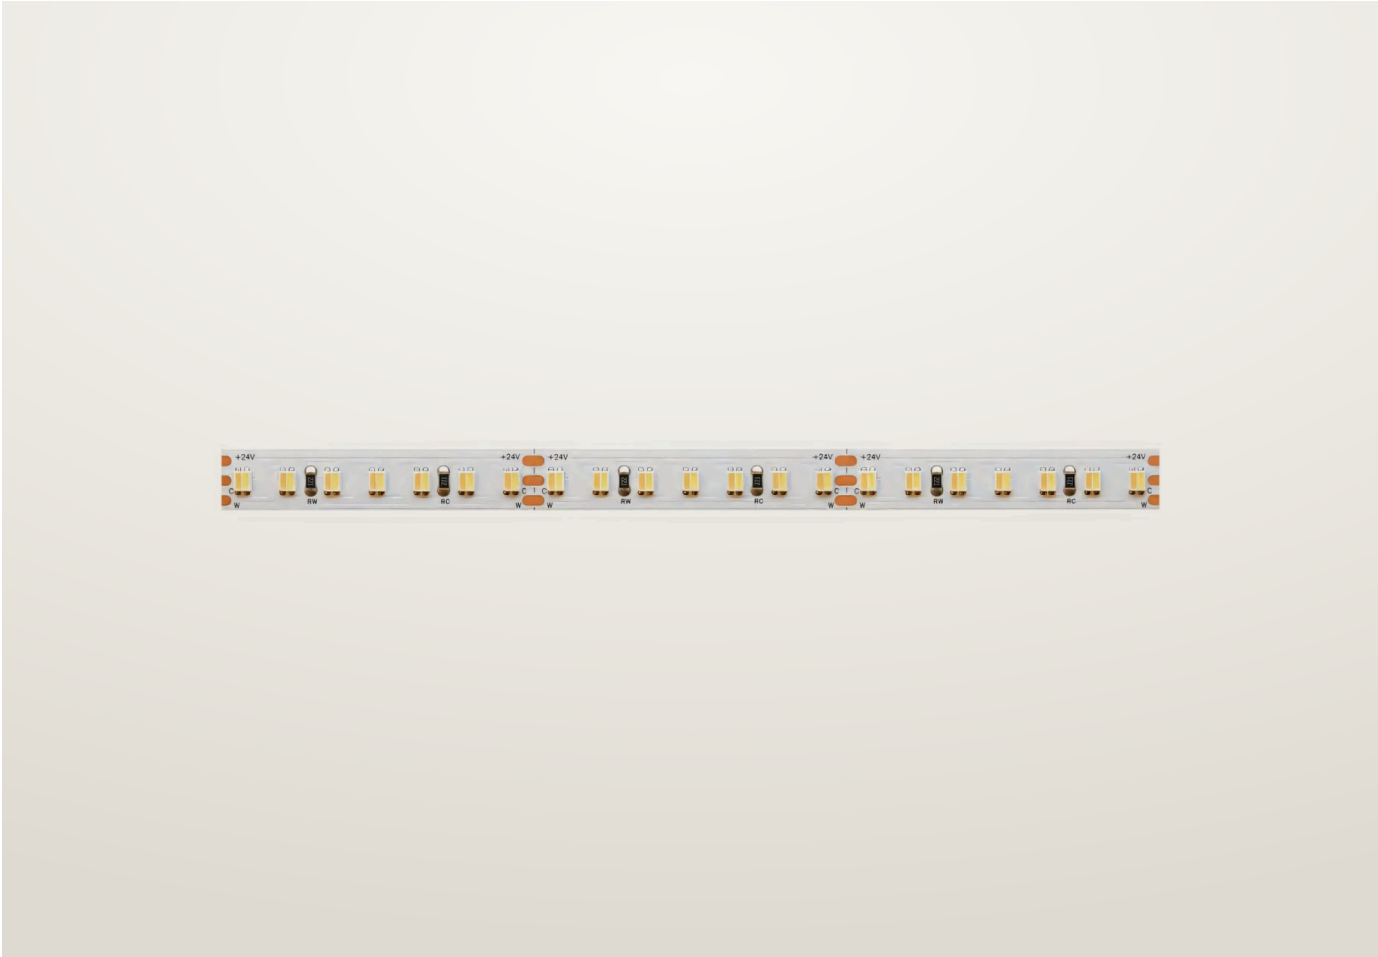

Linear luminaire. 14.4 or 19.2 W. 115.5° or 116.6° beam. — LED source: Citizen
2700, 3000, 4000, 6500 K. 97 CRI.

Power 14.4 W, 19.2 W	Voltage 24 V	Luminous flux undefined–undefined lm
Colour temperature 2700 K, 3000 K, 4000 K, 6500 K	CRI 97 CRI	Beam angles 115.5°, 116.6°
IP rating IP20	Certifications CE, RoHS, ErP, UL	Mounting Recessed
Finishes Black		

Dimensions

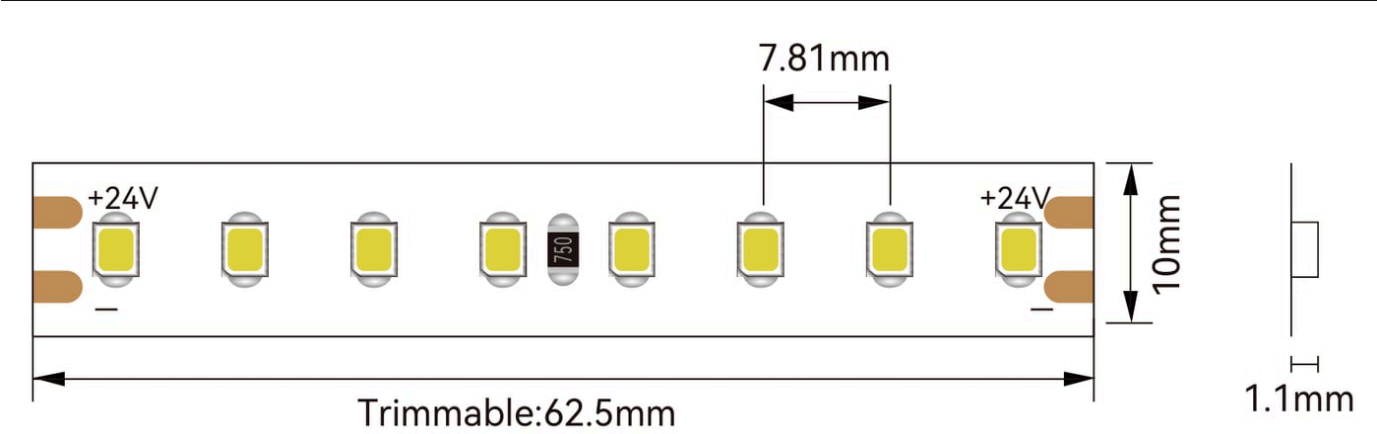


Models

Code	Version	Power	Voltage	Flux	CRI	Size	Beam	Notes
OL-KNNF24128T09-0A39		14.4 W	24 V	1584 lm/m	97 CRI	PCB width 10 mm, thickness 1.1 mm (side view)	116.6°	Power per metre
OL-INNF24128T09-0A39		14.4 W	24 V	1612 lm/m	97 CRI	PCB width 10 mm, thickness 1.1 mm (side view)	116.6°	Power per metre
OL-DNNF24128T09-0A39		14.4 W	24 V	1928 lm/m	97 CRI	PCB width 10 mm, thickness 1.1 mm (side view)	116.6°	Power per metre
OL-WNNF24128T09-0A39		14.4 W	24 V	1928 lm/m	97 CRI	PCB width 10 mm, thickness 1.1 mm (side view)	116.6°	Power per metre
OL-KNNF24128T09-0A39	14.4 W, 128 LED/m, IP20	14.4 W	24 V	1584 lm/m	97 CRI	W10 x T1.1 mm	116.6°	
OL-INNF24128T09-0A39	14.4 W, 128 LED/m, IP20	14.4 W	24 V	1612 lm/m	97 CRI	W10 x T1.1 mm	116.6°	
OL-DNNF24128T09-0A39	14.4 W, 128 LED/m, IP20	14.4 W	24 V	1928 lm/m	97 CRI	W10 x T1.1 mm	116.6°	
OL-WNNF24128T09-0A39	14.4 W, 128 LED/m, IP20	14.4 W	24 V	1928 lm/m	97 CRI	W10 x T1.1 mm	116.6°	
OL-WINF24140T09-0A39	24 V, 19.2 W, tunable white	19.2 W	24 V	890–980 lm/m	97 CRI	W10 x T1.1 mm	115.5°	Power per metre


Photometric data

Illuminance on the beam axis (lx) and beam diameter at each mounting distance, per model and beam angle. IES files for every model and beam can be downloaded from the product page.

14.4 W

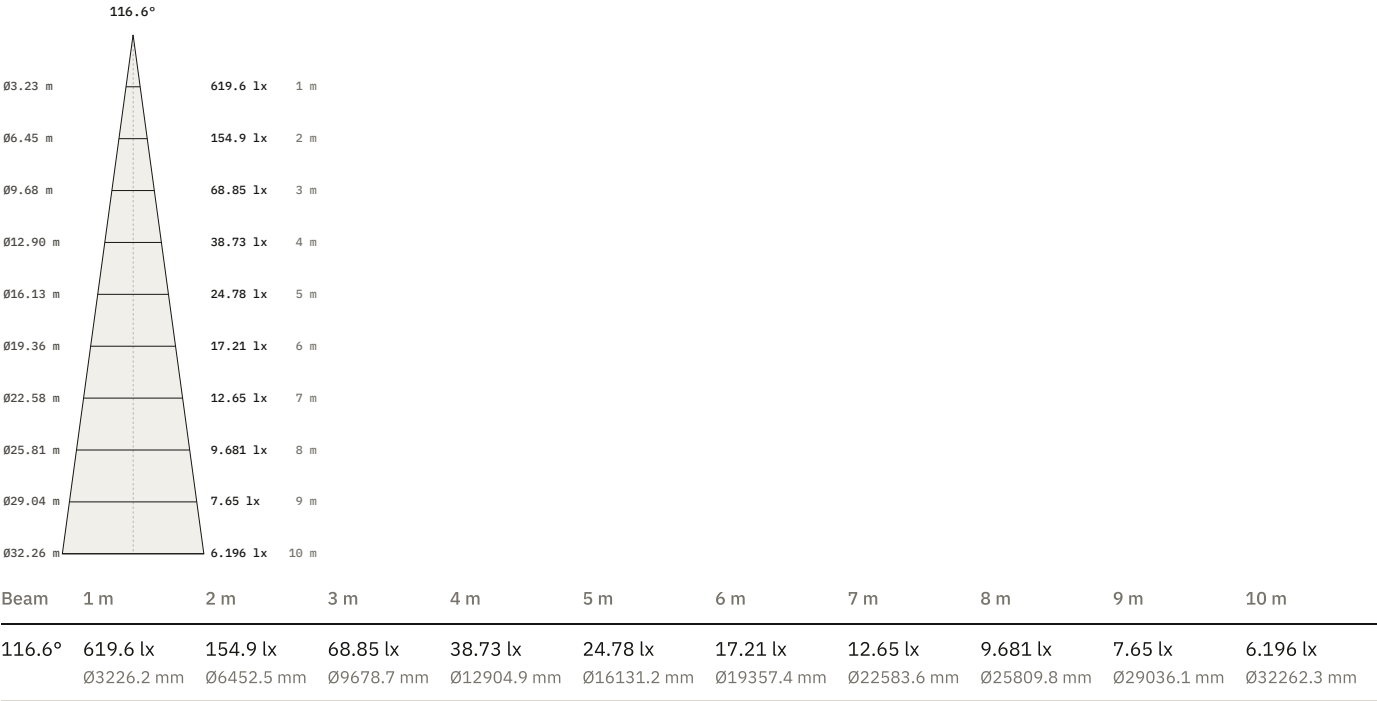


19.2 W

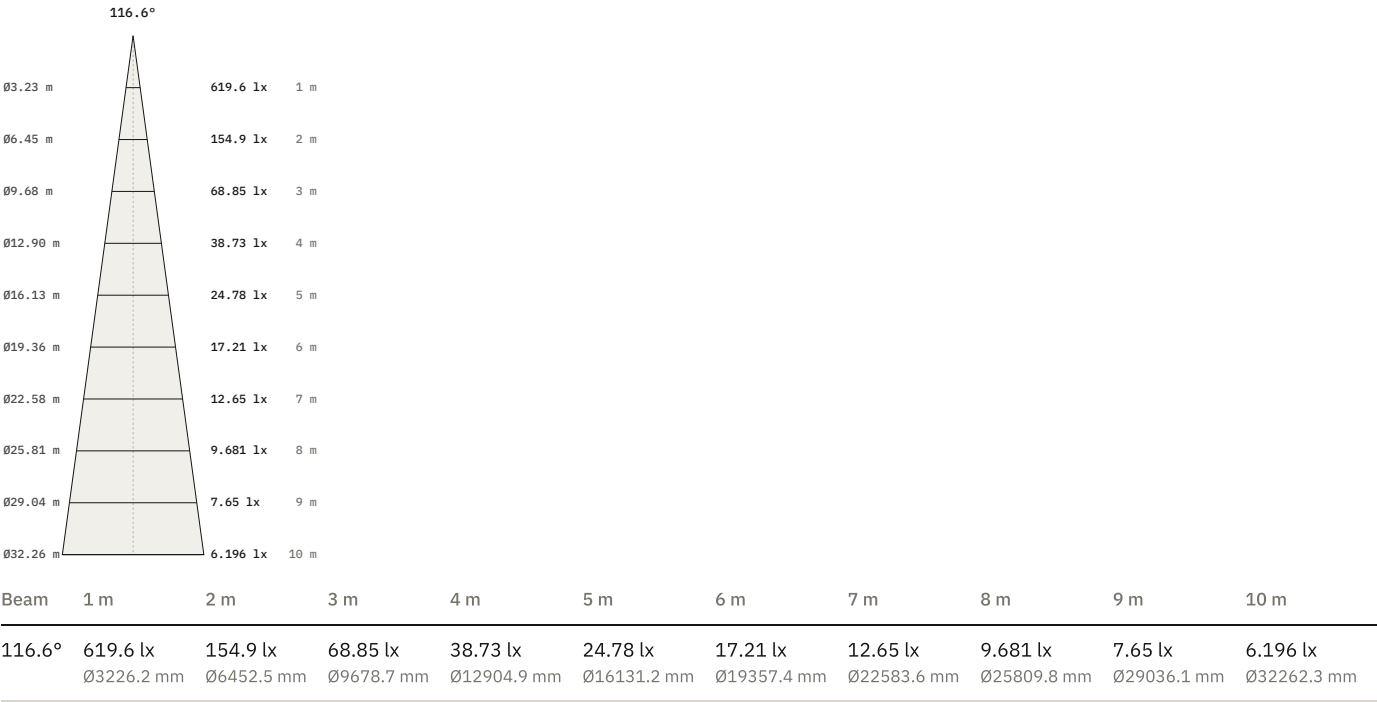

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for OL-WINF24140T09-0A39, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, or estimated where the catalogue gives no photometric figures, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

OL-WINF24140T09-0A39, 19.2 W, 116.6° beam

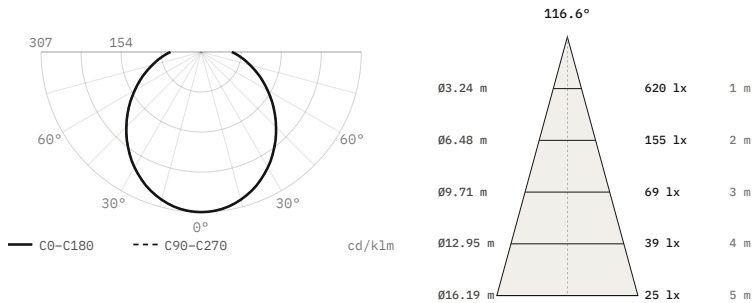

Luminous flux	2,018 lm
Efficacy	105 lm/W
Peak intensity	620 cd, 307 cd/klm
Beam angle (50%)	116.6°
Cut-off angle (2.5%)	90°
Flux 0–30° / 30–60° / 60–90°	23.6 / 45.5 / 30.9 %
Size	10 × 0 mm
Data	Calculated from catalogue data

OL-WINF24140T09-0A39, 19.2 W, 115.5° beam

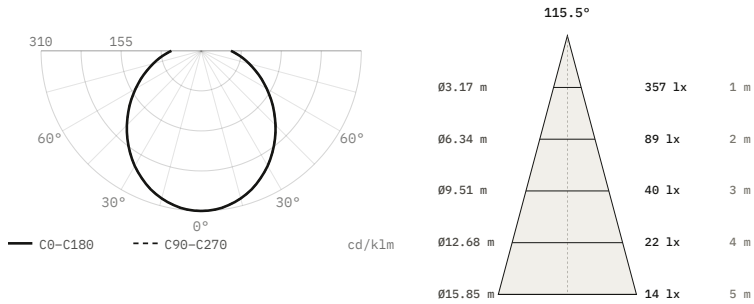

Luminous flux	1,152 lm
Efficacy	60 lm/W
Peak intensity	357 cd, 310 cd/klm
Beam angle (50%)	115.5°
Cut-off angle (2.5%)	90°
Flux 0–30° / 30–60° / 60–90°	23.8 / 45.6 / 30.6 %
Size	10 × 0 mm
Data	Estimated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.