

Linear

OL-KNNF24240T10-0A29

Linear luminaire




Linear luminaire. 19.2 W. 2700, 3000, 4000, 6000 K.
IP20/54/66/67. 97 CRI.

— LED source: Citizen

Power 19.2 W	Voltage 24 V	Luminous flux 1306 lm/m, 1382 lm/m, 1498 lm/m
Colour temperature 2700 K, 3000 K, 4000 K, 6000 K	CRI 97 CRI	IP rating IP20/54/66/67
Certifications CE, RoHS	Mounting Recessed	Finishes Black

Dimensions

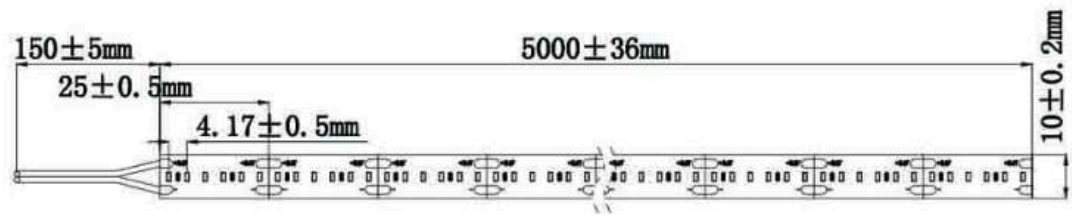


Models

Code	Version	Power	Voltage	Flux	CRI	Size	Notes
OL-KNNF24240T10-0A29	2700 K	19.2 W	24 V	1306 lm/m	97 CRI	PCB W24 mm (table)	Power per metre
OL-INNF24240T10-0A29	3000 K	19.2 W	24 V	1382 lm/m	97 CRI	PCB W24 mm (table)	Power per metre
OL-DNNF24240T10-0A29	4000 K	19.2 W	24 V	1498 lm/m	97 CRI	PCB W24 mm (table)	Power per metre
OL-WNNF24240T10-0A29	6000 K	19.2 W	24 V	1498 lm/m	97 CRI	PCB W24 mm (table)	Power per metre

Photometric data

Illuminance on the beam axis (lx) and beam diameter at each mounting distance, per model and beam angle. IES files for every model and beam can be downloaded from the product page.


19.2 W

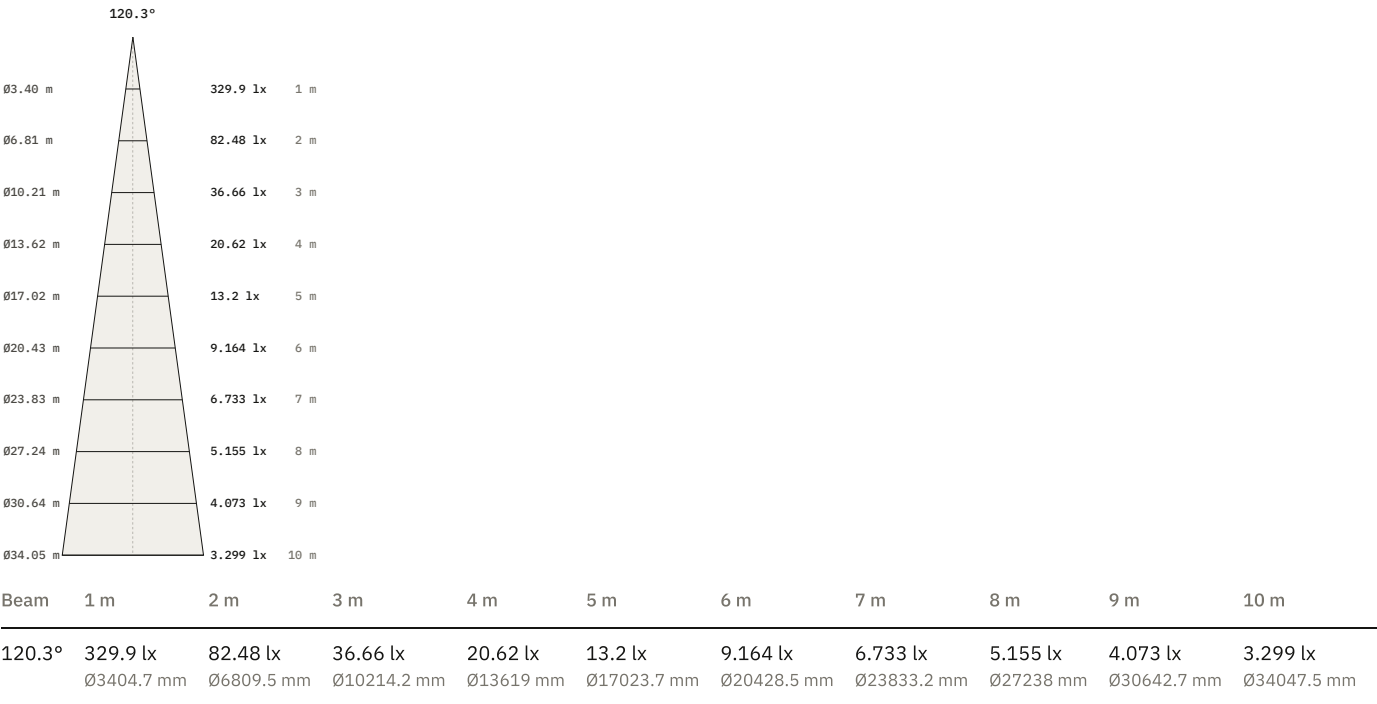

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for OL-KNNF24240T10-0A29, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

OL-KNNF24240T10-0A29, 19.2 W, 120.3° beam

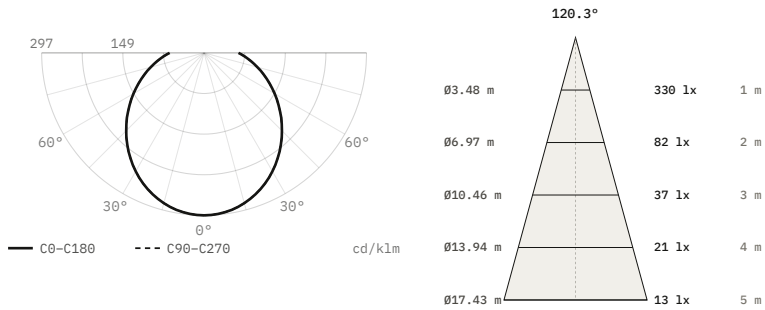

Luminous flux	1,112 lm
Efficacy	58 lm/W
Peak intensity	330 cd, 297 cd/klm
Beam angle (50%)	120.3°
Cut-off angle (2.5%)	90°
Flux 0–30° / 30–60° / 60–90°	23 / 45.1 / 31.9 %
Size	24 × 0 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.