


Linear

OL-W2NF24120T09-6A30

Linear luminaire

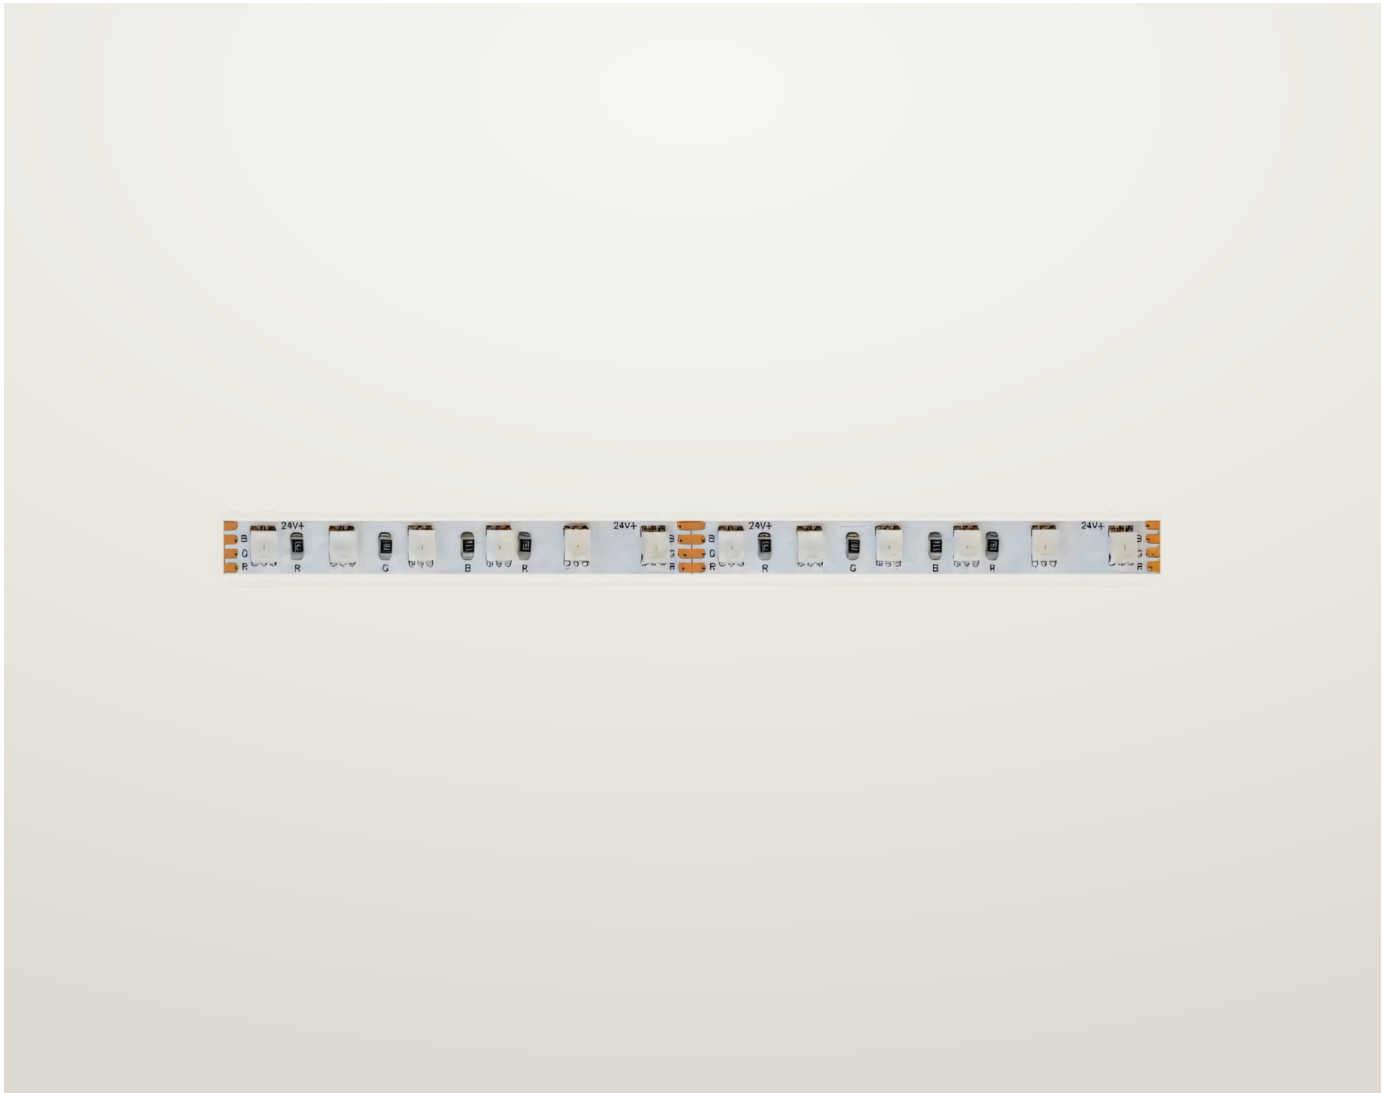


Linear luminaire. 12 W. IP20/54/66/67. 97 CRI.

— LED source: Citizen

Power 12 W	Voltage 24 V	Luminous flux 460 lm/m
CRI 97 CRI	IP rating IP20/54/66/67	Certifications CE, RoHS, UL
Mounting Recessed	Finishes Black	

Dimensions

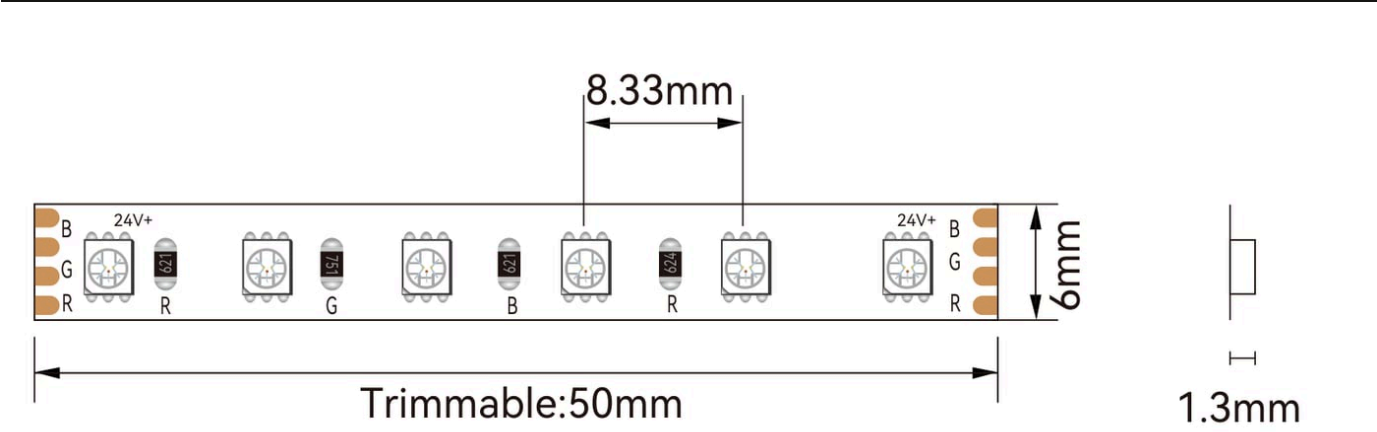


Models

Code	Version	Power	Voltage	Flux	CRI	Size
OL-W2NF24120T09-6A30	RGB (R, G, B channels)	12 W	24 V	460 lm/m	97 CRI	PCB W8 mm (table) / W6 mm x T1.3 mm

Photometric data

Illuminance on the beam axis (lx) and beam diameter at each mounting distance, per model and beam angle. IES files for every model and beam can be downloaded from the product page.


12 W

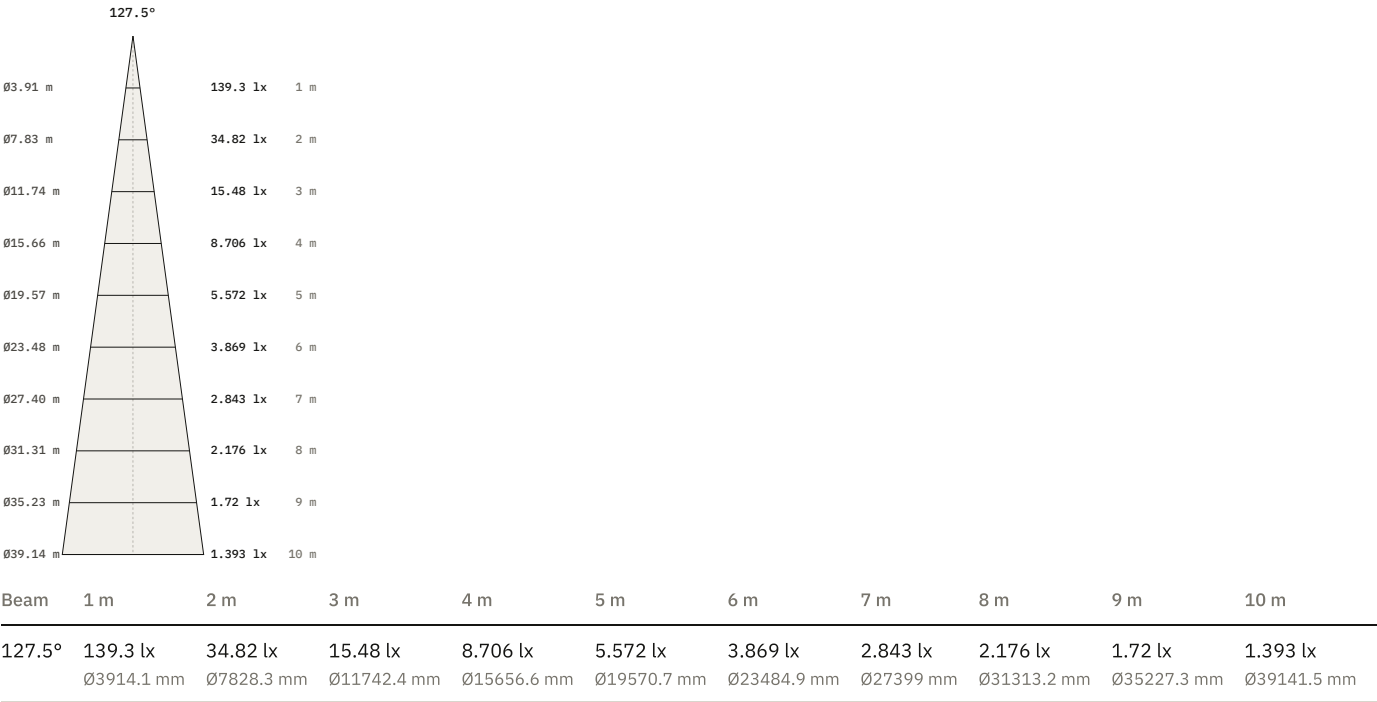

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for OL-W2NF24120T09-6A30, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

OL-W2NF24120T09-6A30, 12 W, 127.5° beam

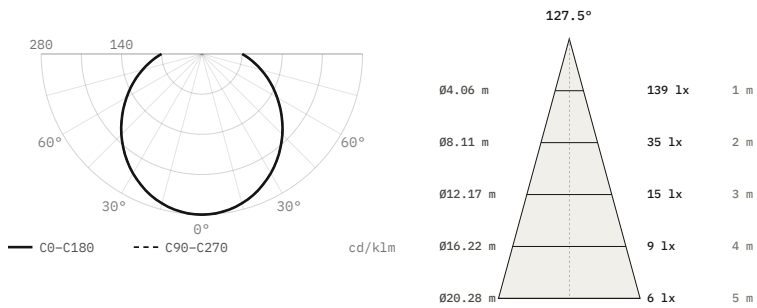

Luminous flux	498 lm
Efficacy	42 lm/W
Peak intensity	139 cd, 280 cd/klm
Beam angle (50%)	127.5°
Cut-off angle (2.5%)	90°
Flux 0–30° / 30–60° / 60–90°	21.8 / 44.4 / 33.7 %
Size	8 × 0 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.