


Linear

OL-W2NF24180T09-0A20

Linear luminaire

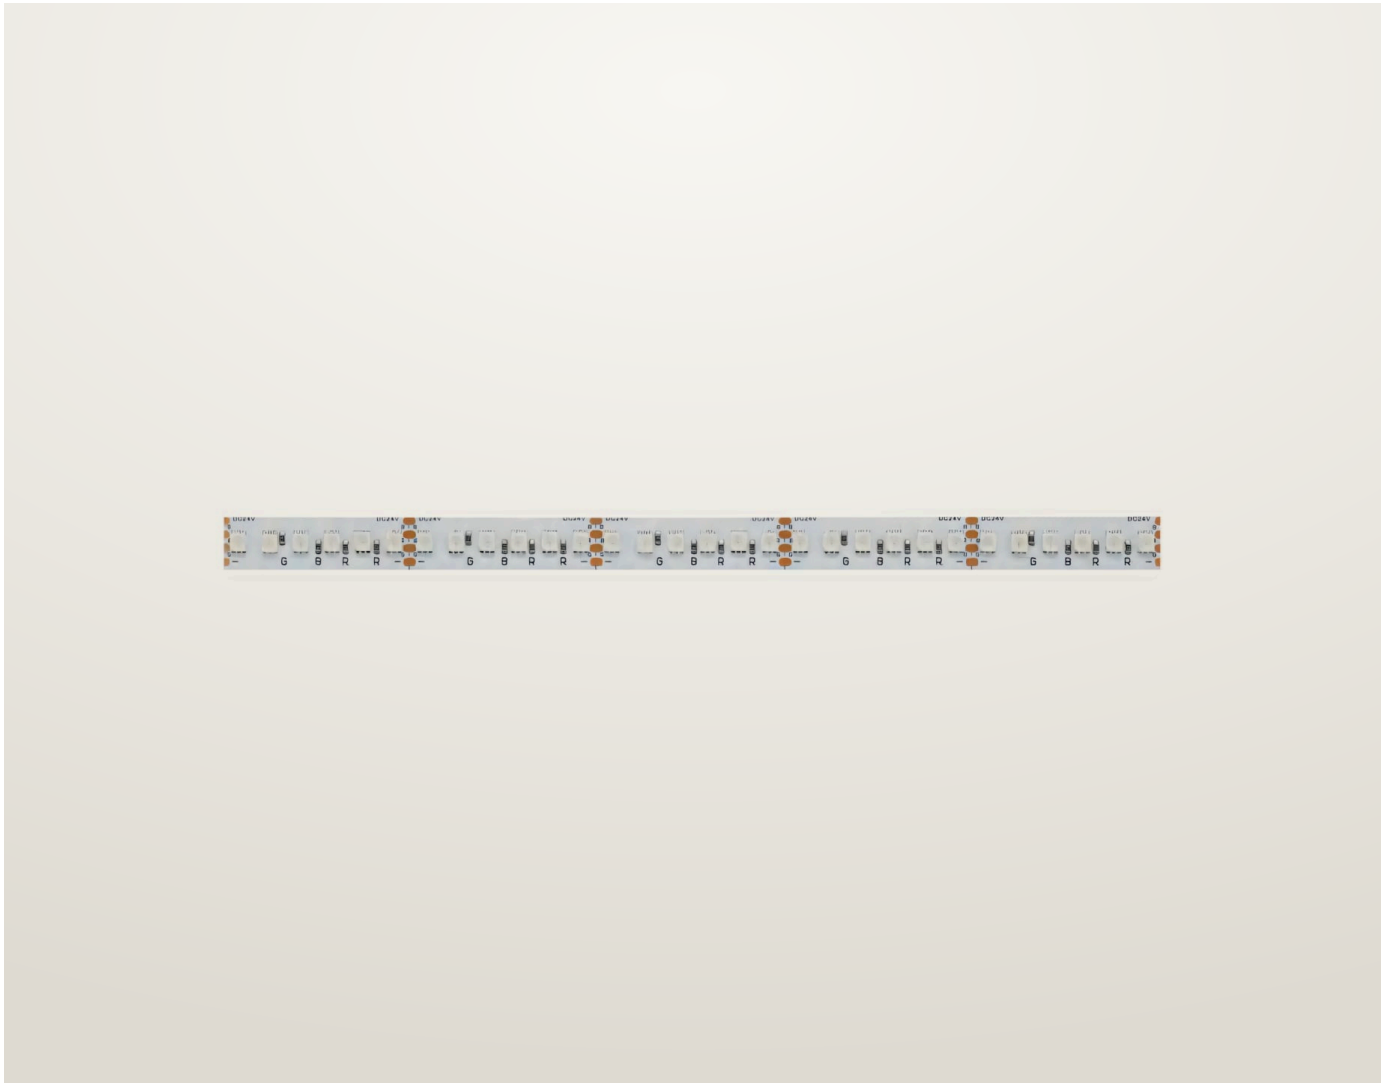


Linear luminaire. 12 W. IP20/54/66/67. 97 CRI.

— LED source: Citizen

Power 12 W	Voltage 24 V	Luminous flux 500 lm/m
CRI 97 CRI	IP rating IP20/54/66/67	Certifications CE, RoHS, UL
Mounting Recessed	Finishes Black	

Dimensions

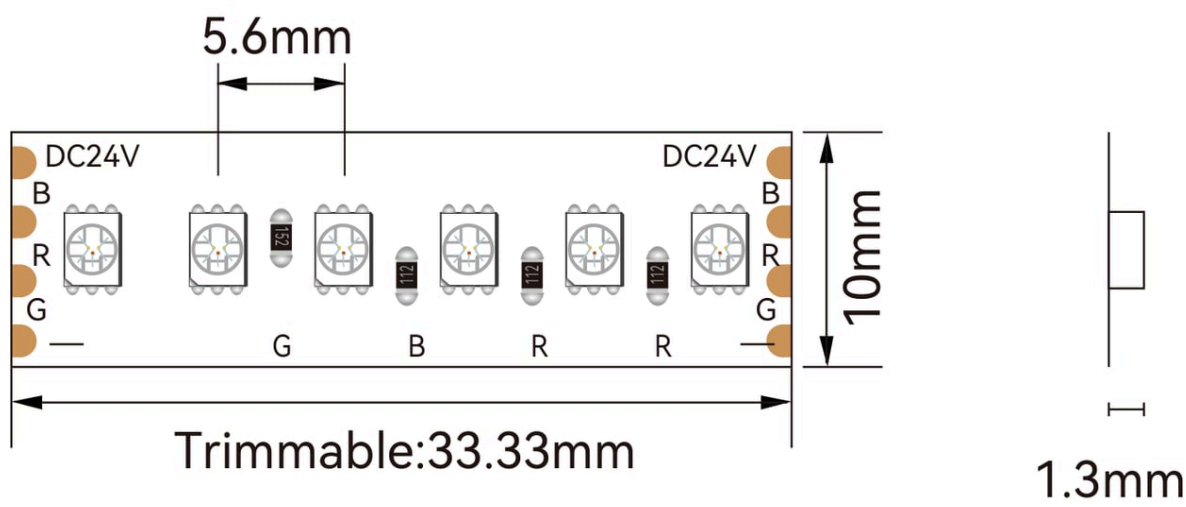


Models

Code	Version	Power	Voltage	Flux	CRI	Size
OL -W2NF24180T09-0A20	RGB (R, G, B channels)	12 W	24 V	500 lm/m	97 CRI	PCB W10 mm x T1.3 mm

Photometric data

Illuminance on the beam axis (lx) and beam diameter at each mounting distance, per model and beam angle. IES files for every model and beam can be downloaded from the product page.


12 W

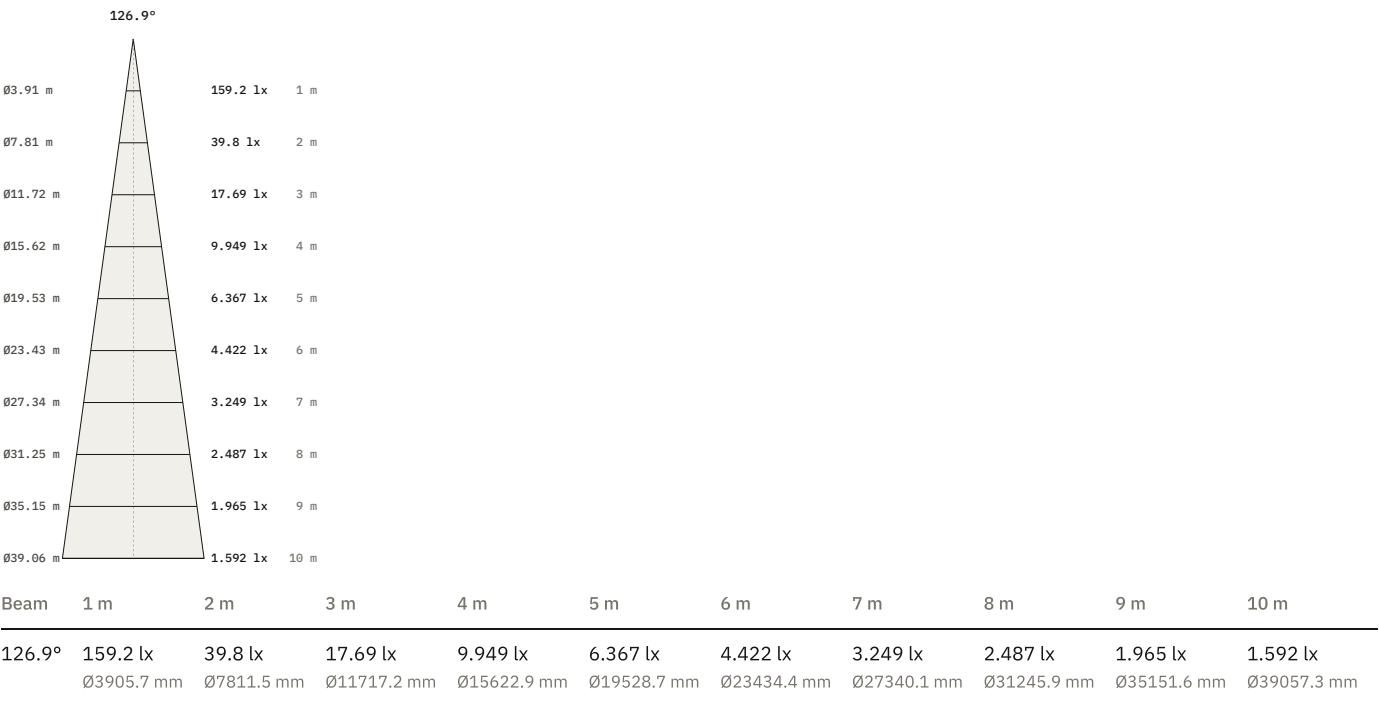

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for OL-W2NF24180T09-0A20, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

OL-W2NF24180T09-0A20, 12 W, 126.9° beam

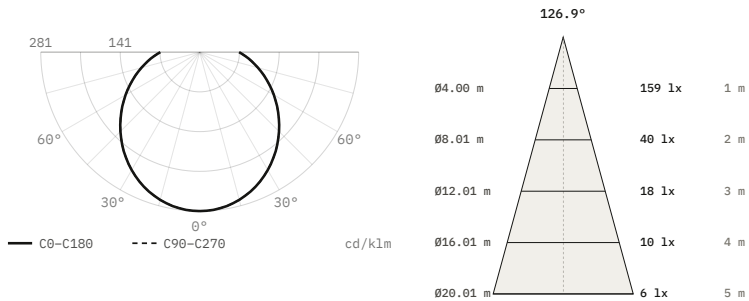

Luminous flux	567 lm
Efficacy	47 lm/W
Peak intensity	159 cd, 281 cd/klm
Beam angle (50%)	126.9°
Cut-off angle (2.5%)	90°
Flux 0–30° / 30–60° / 60–90°	21.9 / 44.5 / 33.6 %
Size	10 × 0 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.