Outdoor

Stone

Outdoor luminaire





Outdoor luminaire. 15 or 20 W. 2700, 3000 K. IP68. 97 CRI.

- LED source: Citizen

Power	Voltage	Colour temperature
15 W, 20 W	24 V	2700 K, 3000 K
CRI	**IP rating**	**Mounting**
97 CRI	IP68	Floor
Control	**Finishes**	
On/Off	Grey	

Dimensions

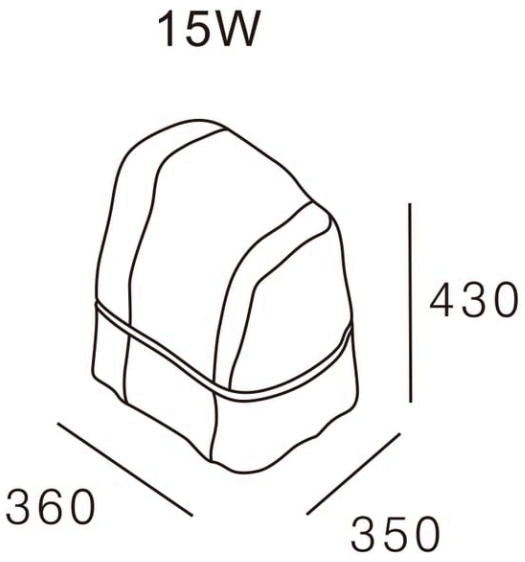

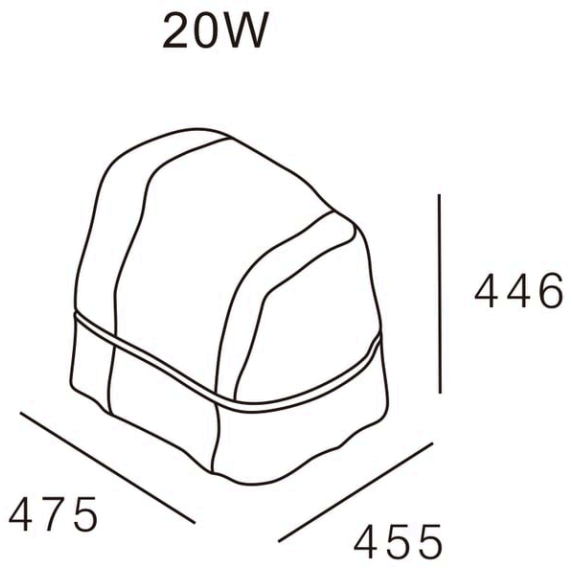


Models


Code	Power	Voltage	CRI	Size	Notes
OUT-L123-330	15 W	24 V	97 CRI	360 × 350 × 430 mm	300 mA
OUT-L123-475	20 W	24 V	97 CRI	475 × 455 × 446 mm	300 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for OUT-L123-475, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

OUT-L123-475, 20 W, wide distribution

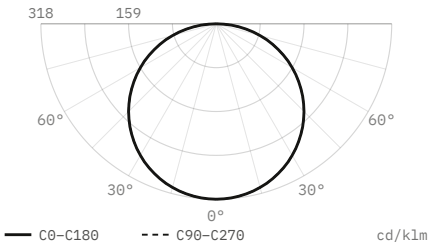

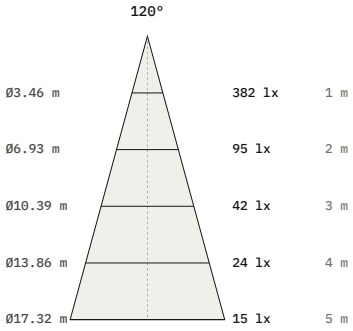

Luminous flux	**1,200 lm**
Efficacy	**60 lm/W**
Peak intensity	**382 cd, 318 cd/klm**
Beam angle (50%)	**120°**
Field angle (10%)	**168.5°**
Cut-off angle (2.5%)	**88.5°**
Flux 0–30° / 30–60° / 60–90°	**25 / 50 / 25 %**
Size	**475 × 455 × 446 mm**
Data	**Estimated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.