Outdoor

M26 Spike

Outdoor luminaire




Outdoor luminaire. 6 W. 100° or 120° beam. 2700, 3000, 4000 K. IP65. 97 CRI.

- LED source: Citizen

Power	Voltage	Colour temperature
6 W	220–240 V AC	2700 K, 3000 K, 4000 K
CRI	**Beam angles**	**IP rating**
97 CRI	100°, 120°	IP65
Mounting	**Control**	**Finishes**
Floor	On/Off	Black

Dimensions

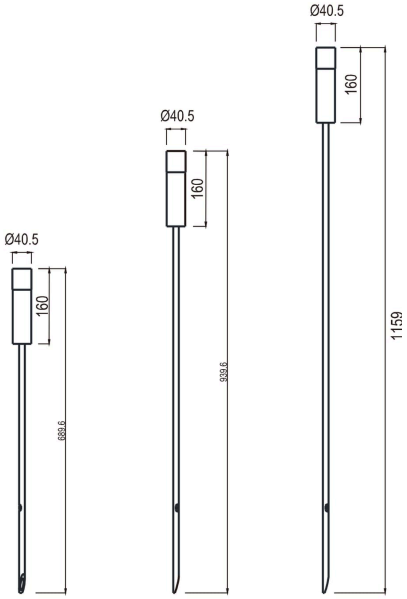


Models


Code	Power	Voltage	CRI	Size	Beam	Notes
OUT-M26-0602-530	6 W	220–240 V AC	97 CRI	Ø40.5 × 689.6 mm	100° 120°	150 mA
OUT-M26-0602-780	6 W	220–240 V AC	97 CRI	Ø40.5 × 939.6 mm	100° 120°	150 mA
OUT-M26-0602-1000	6 W	220–240 V AC	97 CRI	Ø40.5 × 1159 mm	100° 120°	150 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for OUT-M26-0602-530, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


OUT-M26-0602-530, 6 W, 100° beam

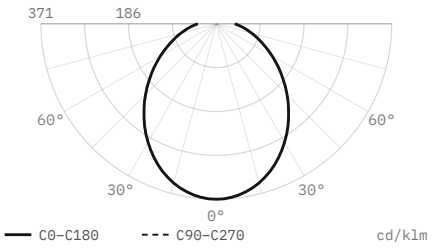


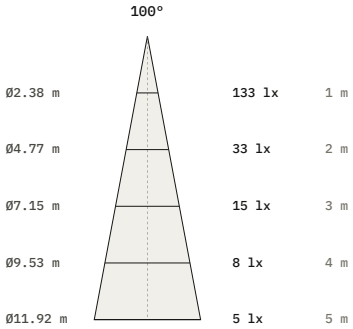

Luminous flux	360 lm
Efficacy	60 lm/W
Peak intensity	133 cd, 371 cd/klm
Beam angle (50%)	100°
Cut-off angle (2.5%)	90°
Flux 0–30° / 30–60° / 60–90°	27.6 / 47.2 / 25.2 %
Size	Ø40.5 × 689.6 mm
Data	Estimated from catalogue data

OUT-M26-0602-530, 6 W, 120° beam

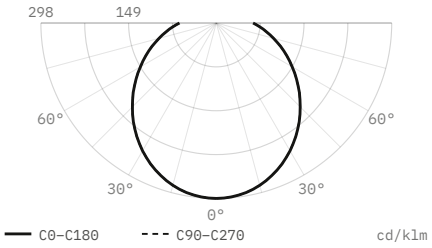

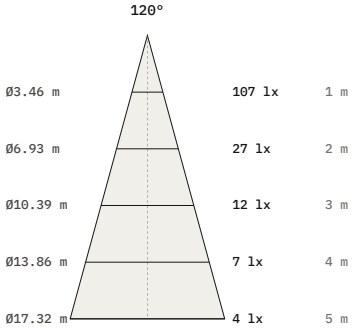

Luminous flux	360 lm
Efficacy	60 lm/W
Peak intensity	107 cd, 298 cd/klm
Beam angle (50%)	120°
Cut-off angle (2.5%)	90°
Flux 0–30° / 30–60° / 60–90°	23 / 45.1 / 31.8 %
Size	Ø40.5 × 689.6 mm
Data	Estimated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.