


Recessed

Oval Indoor DL1832

Recessed spotlight

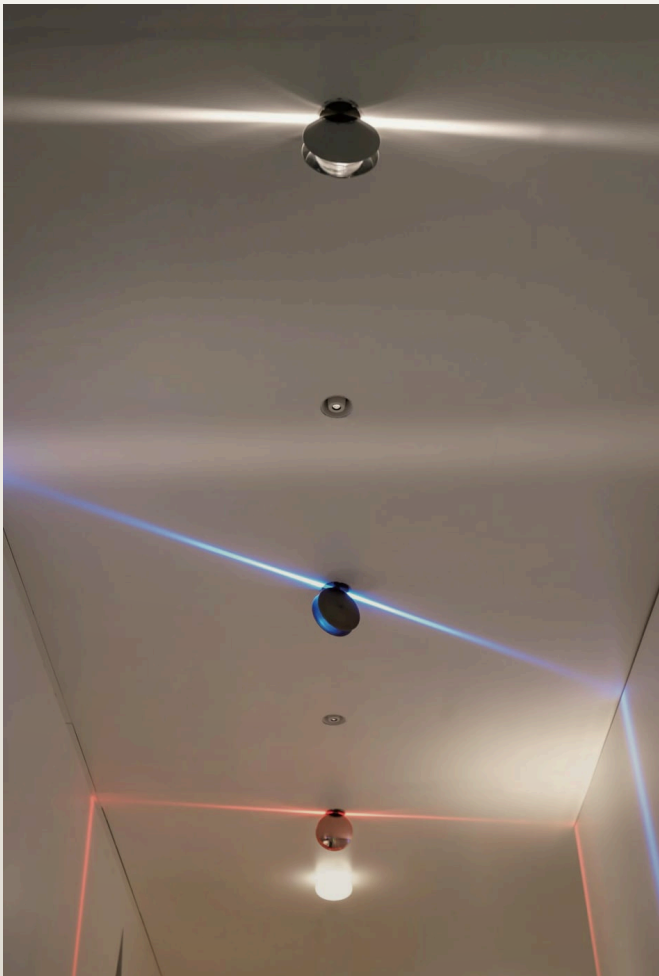


Recessed spotlight. 8 W. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø68 mm
- LED source: Citizen

Power 8 W	Voltage 12 V	Luminous flux 250 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	IP rating IP20
Certifications CE	Mounting Recessed	Finishes Black

Dimensions

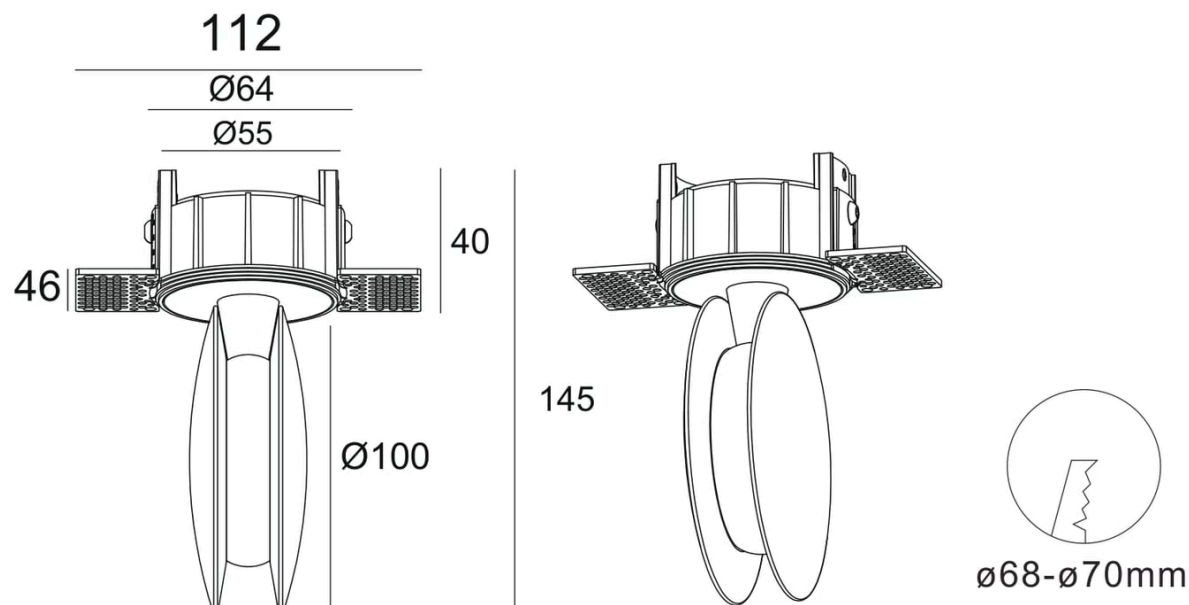

Models

Code	Power	Voltage	Flux	CRI	Size	Cut-out	Notes
DL1832	8 W	12 V	250 lm	97 CRI	112, Ø64, Ø55, 46, 40, 145, Ø100, 38 mm	Ø68 mm	600 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1832, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1832, 8 W, wide distribution

