

Wall

Oval Indoor WL0119

Wall light




Wall light. 5 W. Four beam angles, 15° to 50°. 2700, 3000, 4000 K. 97 CRI.

— LED source: Citizen

Power 5 W	Voltage 230 V AC	Luminous flux 450 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 15°, 24°, 36°, 50°
IP rating IP20	Certifications CE	Mounting Surface, Wall
Finishes Black		

Dimensions

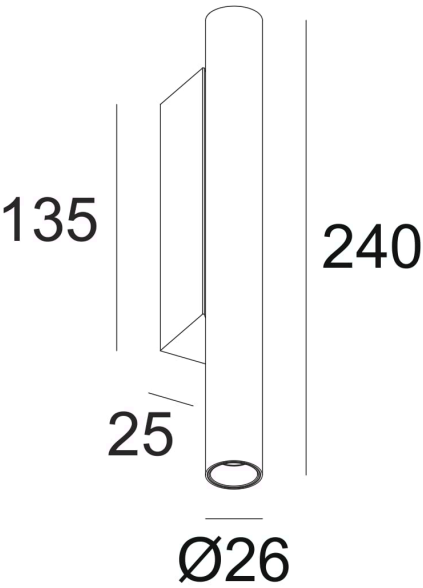


Models

Code	Power	Voltage	Flux	CRI	Size	Beam
WL0119	5 W	230 V AC	450 lm	97 CRI	135, 240, 25, Ø26 mm	15° 24° 36° 50°

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for WL0119, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

WL0119, 5 W, 15° beam

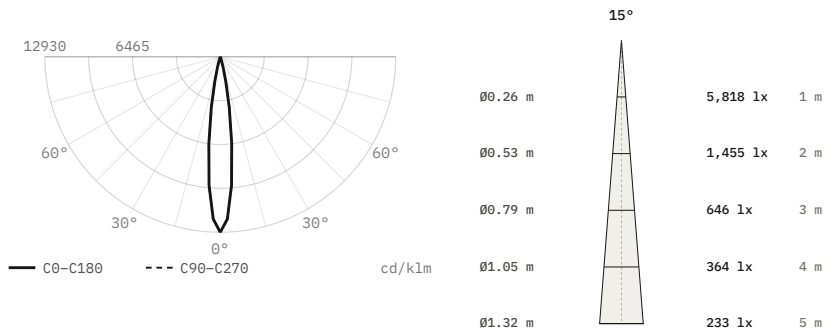


Luminous flux	450 lm
Efficacy	90 lm/W
Peak intensity	5,818 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø26 × 135 mm
Data	Calculated from catalogue data

WL0119, 5 W, 24° beam

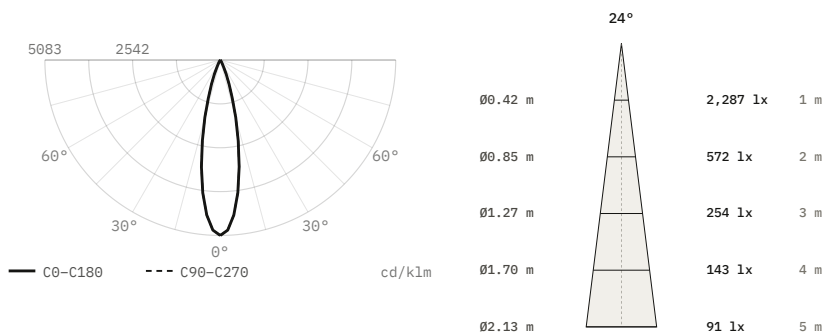


Luminous flux	450 lm
Efficacy	90 lm/W
Peak intensity	2,287 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø26 × 135 mm
Data	Calculated from catalogue data

WL0119, 5 W, 36° beam

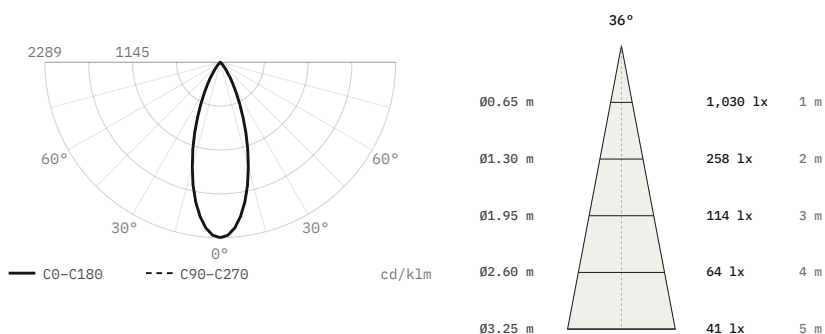

Luminous flux	450 lm
Efficacy	90 lm/W
Peak intensity	1,030 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø26 × 135 mm
Data	Calculated from catalogue data

WL0119, 5 W, 50° beam

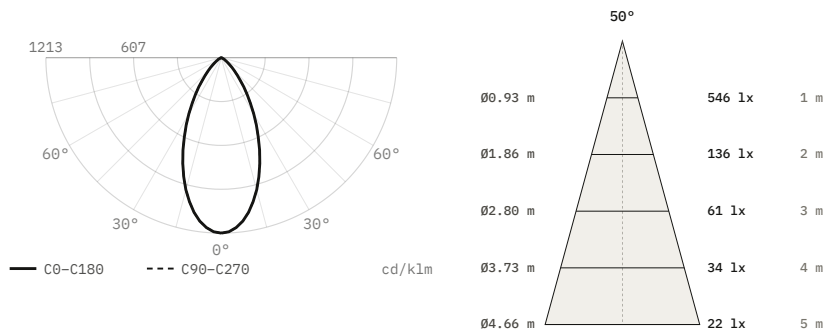

Luminous flux	450 lm
Efficacy	90 lm/W
Peak intensity	546 cd, 1,213 cd/klm
Beam angle (50%)	50°
Field angle (10%)	91.1°
Cut-off angle (2.5%)	57.5°
Flux 0-30° / 30-60° / 60-90°	64.8 / 33.6 / 1.5 %
Size	Ø26 × 135 mm
Data	Calculated from catalogue data