

Wall

Oval Indoor WL0131

Wall light




Wall light. 3 W. Three beam angles, 20° to 60°. 2700, 3000, 4000 K. 97 CRI.

— LED source: Citizen

Power 3 W	Voltage 230 V AC	Luminous flux 450 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 20°, 40°, 60°
IP rating IP20	Certifications CE	Mounting Surface, Wall
Finishes Black		

Dimensions

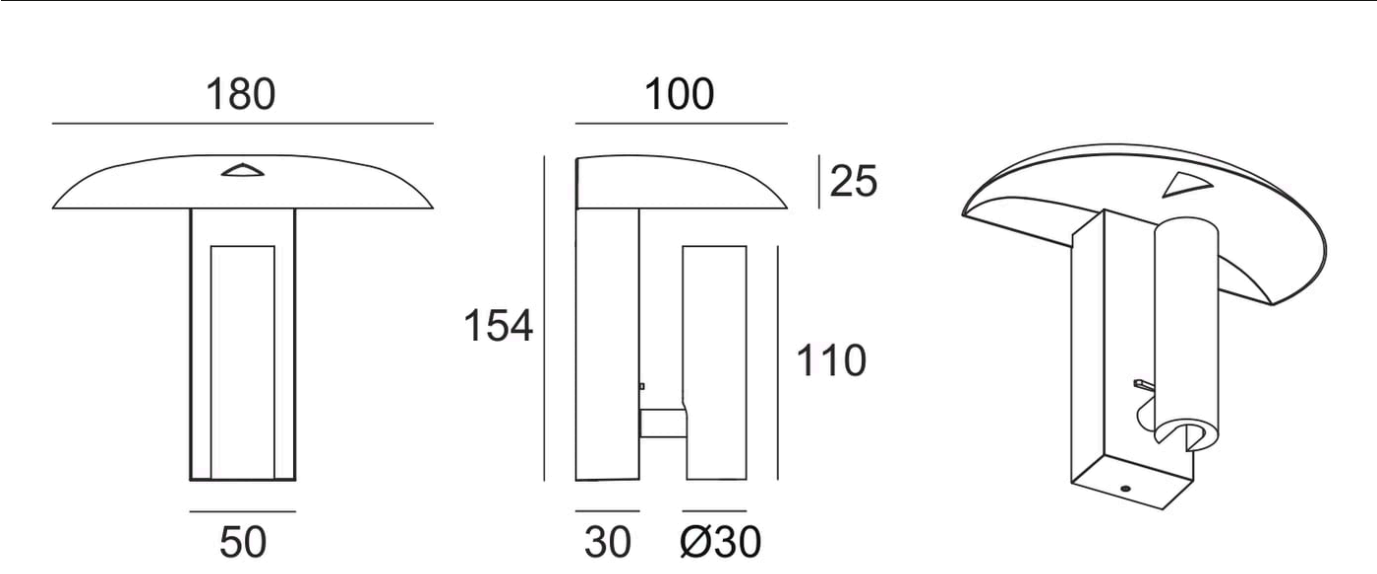


Models

Code	Power	Voltage	Flux	CRI	Size	Beam
WL0131	3 W	230 V AC	450 lm	97 CRI	180, 100, 25, 154, 110, 50, 30, Ø30 mm	20° 40° 60°

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for WL0131, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

WL0131, 3 W, 20° beam

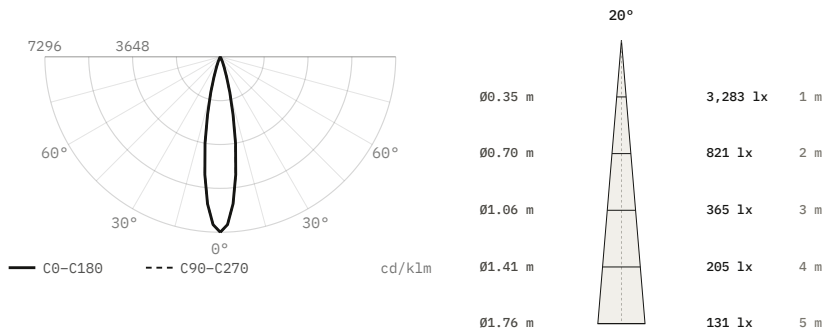


Luminous flux	450 lm
Efficacy	150 lm/W
Peak intensity	3,283 cd, 7,296 cd/klm
Beam angle (50%)	20°
Field angle (10%)	36.5°
Cut-off angle (2.5%)	23°
Flux 0–30° / 30–60° / 60–90°	99.8 / 0.2 / 0 %
Size	Ø30 × 180 mm
Data	Calculated from catalogue data

WL0131, 3 W, 40° beam

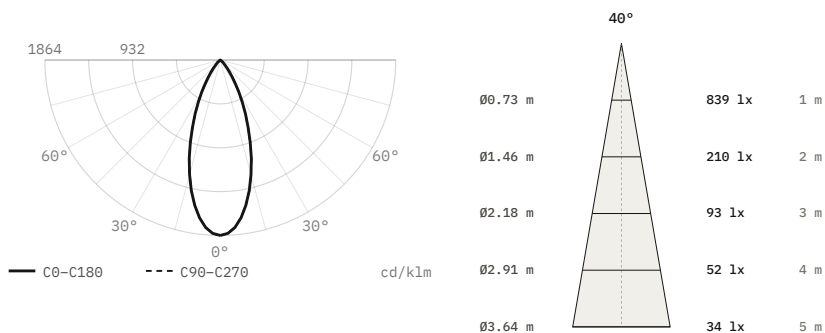

Luminous flux	450 lm
Efficacy	150 lm/W
Peak intensity	839 cd, 1,864 cd/klm
Beam angle (50%)	40°
Field angle (10%)	72.9°
Cut-off angle (2.5%)	46°
Flux 0–30° / 30–60° / 60–90°	79.9 / 19.9 / 0.2 %
Size	Ø30 × 180 mm
Data	Calculated from catalogue data

WL0131, 3 W, 60° beam

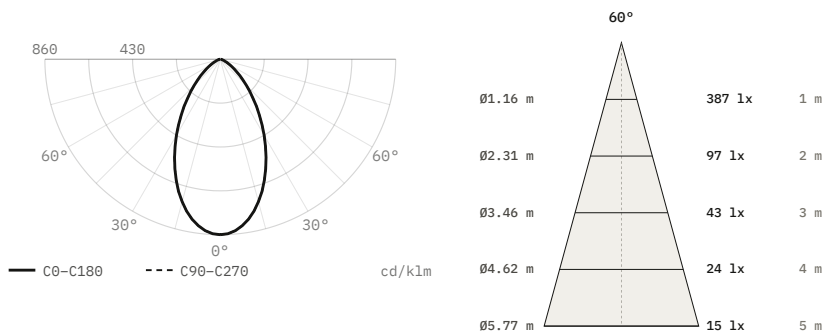

Luminous flux	450 lm
Efficacy	150 lm/W
Peak intensity	387 cd, 860 cd/klm
Beam angle (50%)	60°
Field angle (10%)	109.4°
Cut-off angle (2.5%)	69°
Flux 0–30° / 30–60° / 60–90°	52.4 / 42.6 / 5 %
Size	Ø30 × 180 mm
Data	Calculated from catalogue data

