

Wall

# Oval Indoor WL0140

Wall light




Wall light. 3 W. 24° or 36° beam. 2700, 3000, 4000 K. 97 CRI.

— LED source: Citizen

|                                              |                      |                           |
|----------------------------------------------|----------------------|---------------------------|
| Power<br>3 W                                 | Voltage<br>230 V AC  | Luminous flux<br>280 lm   |
| Colour temperature<br>2700 K, 3000 K, 4000 K | CRI<br>97 CRI        | Beam angles<br>24°, 36°   |
| IP rating<br>IP20                            | Certifications<br>CE | Mounting<br>Surface, Wall |
| Finishes<br>Black                            |                      |                           |

Dimensions

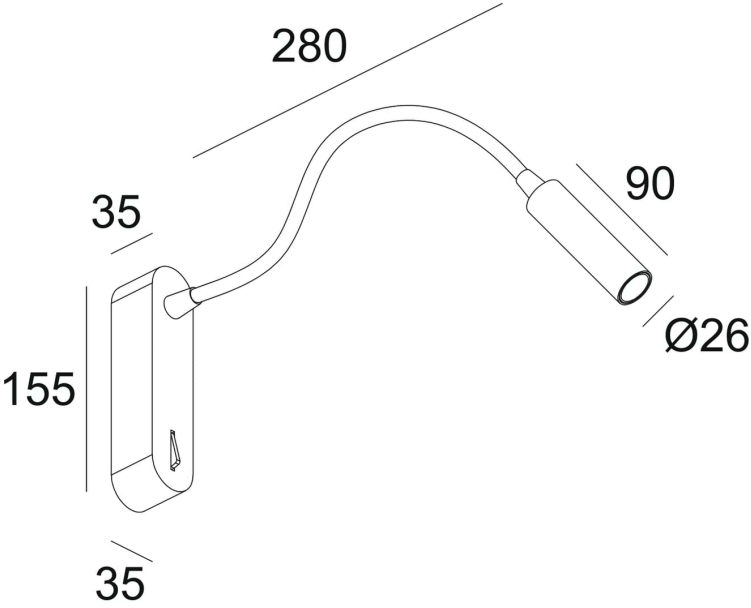


Models

| Code   | Power | Voltage  | Flux   | CRI    | Size                         | Beam    |
|--------|-------|----------|--------|--------|------------------------------|---------|
| WL0140 | 3 W   | 230 V AC | 280 lm | 97 CRI | 280, 35, 90, Ø26, 155, 35 mm | 24° 36° |

# Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for WL0140, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

## WL0140, 3 W, 24° beam

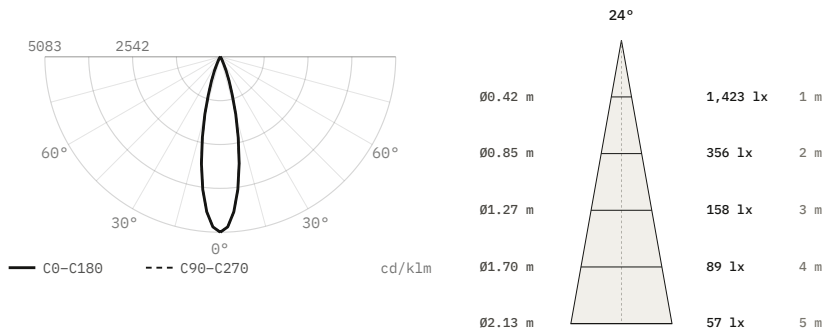

|                              |                                |
|------------------------------|--------------------------------|
| Luminous flux                | 280 lm                         |
| Efficacy                     | 93 lm/W                        |
| Peak intensity               | 1,423 cd, 5,083 cd/klm         |
| Beam angle (50%)             | 24°                            |
| Field angle (10%)            | 43.7°                          |
| Cut-off angle (2.5%)         | 27.5°                          |
| Flux 0–30° / 30–60° / 60–90° | 98.7 / 1.3 / 0 %               |
| Size                         | Ø26 × 280 mm                   |
| Data                         | Calculated from catalogue data |

## WL0140, 3 W, 36° beam

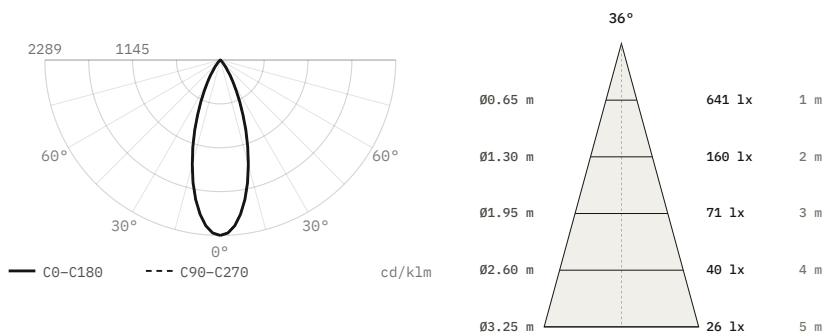

|                              |                                |
|------------------------------|--------------------------------|
| Luminous flux                | 280 lm                         |
| Efficacy                     | 93 lm/W                        |
| Peak intensity               | 641 cd, 2,289 cd/klm           |
| Beam angle (50%)             | 36°                            |
| Field angle (10%)            | 65.6°                          |
| Cut-off angle (2.5%)         | 41.5°                          |
| Flux 0–30° / 30–60° / 60–90° | 86.1 / 13.9 / 0 %              |
| Size                         | Ø26 × 280 mm                   |
| Data                         | Calculated from catalogue data |